



LEISTUNGSERKLÄRUNG

DoP W0011

für fischer terrace screw A2 / A4, FTS-ST

DE

1. Eindeutiger Kenncode des Produkttyps: DoP W0011
2. Verwendungszweck(e): **Stiftförmige Verbindungsmittel für Erzeugnisse aus Bauholz für tragende Zwecke.**
3. Hersteller: **fischerwerke GmbH & Co. KG, Klaus-Fischer-Str. 1, 72178 Waldachtal, Deutschland**
4. Bevollmächtigter: **-**
5. AVCP - System/e: **3**
6. Harmonisierte Norm: **EN 14592:2008 +A1:2012
ITT report CPR-J-01009-20, CPR-J-01010-20, CPR-J-01011-20, CPR-J-01012-20, CPR-J-01013-20**

Notifizierte Stelle(n): **1015, Strojírenský zkušební ústav, s. p.**

7. Erklärte Leistung(en):

Mechanische Festigkeit und Standsicherheit (BWR 1)

- Material und Korrosionsschutz: Stainless steel A2 / Stainless steel A4
- Abmessungen: Anhang 1

	d= 4,2 mm (A2)	d= 4,2 mm (A4)	d= 4,5 mm (A2)	d= 4,8 mm (A2)	d= 4,8 mm (A4)
Charakteristisches Fliemoment: [Nmm]	1709	2367	2603	3256	2819
Charakteristischer Ausziehparameter:					
rechtwinklig Faser [N/mm ²]	17,66	17,18	16,86	16,84	16,82
parallel Faser [N/mm ²]	13,65	14,11	14,29	13,69	12,69
Charakteristische Holzrohndichte: [kg/m ³]	350	350	350	350	350
Charakteristischer Kopfdurchziehparameter: [N/mm ²]	23,08	23,5	23,8	22,66	22,72
Charakteristische Holzrohndichte: [kg/m ³]	350	350	350	350	350
Charakteristische Zugtragfähigkeit: [kN]	3,97	4,43	4,81	4,96	4,91
Charakteristisches Torsionsverhältnis: [-]	1,81	2,43	1,84	1,96	3,12
Charakteristische Holzrohndichte: [kg/m ³]	350	350	350	350	350
Dauerhaftigkeit Nutzungsklasse EN1995-1-1: [-]	1-3	1-3	1-3	1-3	1-3

8. Angemessene Technische Dokumentation **-**
und/oder Spezifische Technische Dokumentation:

Die Leistung des vorstehenden Produkts entspricht der erklärten Leistung/den erklärten Leistungen. Für die Erstellung der Leistungserklärung im Einklang mit der Verordnung (EU) Nr. 305/2011 ist allein der obengenannte Hersteller verantwortlich.

Unterzeichnet für den Hersteller und im Namen des Herstellers von:

Dr. Oliver Geibig, Geschäftsführer Business Units & Engineering
Tumlingen, 2021-02-25

Jürgen Grün, Geschäftsführer Chemie & Qualität

Diese Leistungserklärung wurde in mehreren Sprachen erstellt. Für alle Streitigkeiten, die sich aus der Auslegung ergeben, ist die Fassung in englischer Sprache maßgeblich.

Der Anhang enthält freiwillige und ergänzende Informationen in englischer Sprache, die über die (sprachneutral festgelegten) gesetzlichen Anforderungen hinausgehen.

Annex 1

Terrace Screw - Self-drilling screw - Countersunk head with partial thread

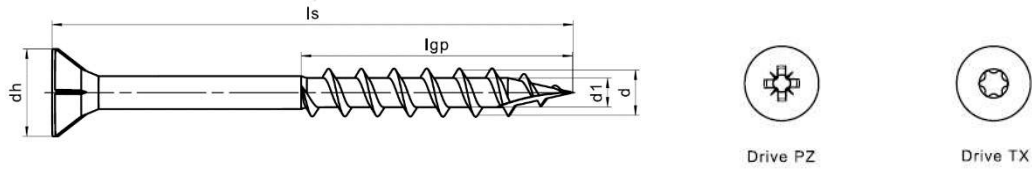


Figure not to scale

- Stainless Steel (A2 / A4)

Nominal diameter		4,2	4,5	4,8			
d	Outer thread diameter	4,00	4,40	4,70			
d ₁	Inner thread diameter	2,50	2,80	3,00			
d _h	Head diameter	7,25	7,75	8,00			
Drive TX		20	20	20			
Drive PZ		2	2	2			
Screw length l _s		Standard thread length l _{gf} = Full thread l _{gp} = Partial thread					
Nominal length		l _{gf}	l _{gp}	l _{gf}	l _{gp}	l _{gf}	l _{gp}
40			22		22		22
45			22		22		22
50			29		29		29
55			29		29		29
60			36		36		36
70			36		36		36
75			36		36		36
80			59		59		59
90			59		59		59
100			59		59		59
110			71		71		71
120			71		71		71
in steps of 10mm			71		71		71
150			71		71		71

All sizes in mm



LEISTUNGSERKLÄRUNG

DoP W0003

für fischer Power-Fast-Schrauben und fischer-Holzbauschrauben

DE

1. Eindeutiger Kenncode des Produkttyps: DoP W0003
2. Verwendungszweck(e): Selbstbohrende Schrauben zur Verwendung in Holzkonstruktionen, siehe Anhang, insbesondere die Anhänge 1, 2.
3. Hersteller: fischerwerke GmbH & Co. KG, Klaus-Fischer-Str. 1, 72178 Waldachtal, Deutschland
4. Bevollmächtigter: -
5. AVCP - System/e: 3
6. Europäisches Bewertungsdokument: EAD 130118-00-0603
Europäische Technische Bewertung: ETA-11/0027; 2019-01-02
Technische Bewertungsstelle: ETA-Danmark A/S
Notifizierte Stelle(n): 0769 Karlsruher Institut für Technologie (KIT)
7. Erklärte Leistung(en):
Mechanische Festigkeit und Standsicherheit (BWR 1), Sicherheit und Barrierefreiheit bei der Nutzung (BWR 4)
Abmessungen: Anhänge 13-32
Charakteristisches Fließmoment: Anhang 5
Biegewinkel: Anhang 1
Charakteristischer Ausziehparameter: Anhänge 5,6
Charakteristischer Kopfdurchziehparameter: Anhang 6
Charakteristische Zugfestigkeit: Anhang 3
Charakteristische Streckgrenze: Anhang 7
Charakteristische Torsionsfestigkeit: Anhang 3
Einschraubmoment: Anhang 3
Achsabstände, End- und Randabstände der Schrauben und Mindestdicke des Holzmaterials: Anhänge 10,11,39

Verschiebungsmodul für hauptsächlich axial belastete Schrauben: Anhang 8
Beständigkeit gegen Korrosion: Anhänge 1,2,9,10,13-32

Sicherheit im Brandfall (BWR 2)
Brandverhalten: Klasse (A1)
8. Angemessene Technische Dokumentation und/oder Spezifische Technische Dokumentation: -

Die Leistung des vorstehenden Produkts entspricht der erklärten Leistung/den erklärten Leistungen. Für die Erstellung der Leistungserklärung im Einklang mit der Verordnung (EU) Nr. 305/2011 ist allein der obengenannte Hersteller verantwortlich.

Unterzeichnet für den Hersteller und im Namen des Herstellers von:

Dr.-Ing. Oliver Geibig, Geschäftsführer Business Units & Engineering
Tumlingen, 2021-01-16

Jürgen Grün, Geschäftsführer Chemie & Qualität

Diese Leistungserklärung wurde in mehreren Sprachen erstellt. Für alle Streitigkeiten, die sich aus der Auslegung ergeben, ist die Fassung in englischer Sprache maßgeblich.

Der Anhang enthält freiwillige und ergänzende Informationen in englischer Sprache, die über die (sprachneutral festgelegten) gesetzlichen Anforderungen hinausgehen.

II BESONDERER TEIL DER EUROPÄISCHEN TECHNISCHEN BEWERTUNG

1 Beschreibung des Produkts und des Verwendungszwecks

Technische Beschreibung des Produkts

„fischer Power-Fast“-Schrauben und „fischer-Holzbauschrauben“ sind selbstbohrende Schrauben, die in Holzkonstruktionen verwendet werden. „fischer Power-Fast“-Schrauben haben ein Teilgewinde oder ein Vollgewinde, „fischer-Holzbauschrauben“ haben ebenfalls ein Teilgewinde oder ein Vollgewinde. Schrauben aus Kohlenstoffstahl-Draht werden mit einem Nenndurchmesser von 3,0 mm bis 12,0 mm gefertigt. Schrauben aus rostfreiem Stahldraht werden mit einem Nenndurchmesser von 3,0 mm bis 8,0 mm gefertigt. Die Materialspezifikation der Edelstahlschrauben ist bei der ETA-Danmark hinterlegt. Ist ein Korrosionsschutz erforderlich, so müssen Material bzw. Beschichtung mit den relevanten in Anhang A der EN 14592 angeführten Spezifikationen übereinstimmen.

Geometrie und Material

Der Nenndurchmesser (Gewindeaußendurchmesser), d , darf nicht kleiner als 3,0 mm und nicht größer als 12,0 mm sein. Die Gesamtlänge der Schrauben l_s darf nicht kürzer als 20 mm und nicht länger als 600 mm sein. Die sonstigen Maße sind in Anhang A1 bis Anhang A18 angegeben.

Das Verhältnis des Kerndurchmessers zum Gewindeaußendurchmesser d_i/d reicht von 0,59 bis 0,69.

Die Schrauben haben eine Mindestgewindelänge ℓ_g von $4,0 \cdot d$ (d.h. $\ell_g \geq 4,0 \cdot d$).

Die Gewindesteigung p (Abstand zwischen zwei nebeneinander liegenden Gewindeflanken) reicht von $0,50 \cdot d$ bis $0,67 \cdot d$.

Bei einem Biegewinkel α von weniger als $(45/d^{0,7} + 20)$ Grad dürfen die Schrauben keine Risse aufweisen.

Die Materialspezifikation der Edelstahlschrauben ist bei der ETA-Danmark hinterlegt.

2 Beschreibung des bestimmungsgemäßen Gebrauchs laut geltender EAD

Die Schrauben sind für die Verwendung in tragenden Holzkonstruktionen zur Verbindung von Teilen aus Vollholz (Nadel- und Laubholz) sowie aus Brettschichtholz, Brettspertholz, Furnierschichtholz,

ähnlichen verleimten Holzbauteilen, Holzwerkstoffplatten oder von Stahlteilen bestimmt.

Zudem können „fischer Power-Fast“-Schrauben mit einem Durchmesser von 6 mm, 8 mm, 10 mm und 12 mm auch zur Befestigung von Aufdachdämmsystemen auf Sparren und zur Befestigung von Wärmedämmung an vertikalen Fassaden verwendet werden.

Stahlbleche und Holzwerkstoffplatten dürfen, mit Ausnahme von Vollholz-, und Brettspertholzplatten, Egger OSB Eurostrand 4 TOP, nur auf der Seite des Schraubenkopfes angebracht werden. Nachstehende Holzwerkstoffplatten können verwendet werden:

- Sperrholz gemäß EN 636 oder ETA
- Spanplatten gemäß EN 312 oder ETA
- Grobspanplatten des Typs OSB/3 und OSB/4 gemäß EN 300 oder ETA
- Faserplatten gemäß EN 622-2 und 622-3 oder ETA (Mindestrohdichte 650 kg/m³)
- Zementgebundene Spanplatten gemäß ETA
- Vollholzplatten gemäß EN 13353 und EN 13986, sowie Brettspertholz gemäß ETA
- Furnierschichtholz gemäß EN 14374 oder ETA
- Verarbeitete Holzwerkstoff-Produkte gemäß ETA, sofern diese Regelungen für die Verwendung von selbstbohrenden Schrauben enthält und die Vorgaben der für das verarbeitete Holzwerkstoff-Produkt ausgestellten ETA eingehalten sind.

Die Schrauben dürfen in Nadelholz mit oder ohne Vorbohren eingedreht werden, wobei der Bohrdurchmesser der Vorbohrung über die gesamte Länge des Gewindebereichs nicht größer als der Kerndurchmesser und im Bereich des glatten Schafts nicht größer als der Schaftdurchmesser sein darf. In Laubholz sind die Schrauben mit Vorbohren einzudrehen, wobei der Durchmesser der Vorbohrung einen angemessenen Durchmesser wie in Abschnitt 3.11 vorgegeben aufweisen muss.

Die Schrauben sind für Holzverbindungen vorgesehen, welche die Anforderungen an mechanische Beständigkeit, Stabilität und Gebrauchssicherheit im Sinne der grundlegenden Anforderungen 1 und 4 der Verordnung 305/2011 erfüllen.

Form und Maße der Unterlegscheiben sind in Anhang A19 vorgegeben. Die Unterlegscheiben müssen aus Stahl sein.

Die Bemessung der Verbindungen muss auf den charakteristischen Werten der Tragfähigkeit der Schrauben basieren. Die Tragfähigkeiten sind von den charakteristischen Werten gemäß Eurocode 5 oder einer entsprechenden nationalen Norm (z. B. DIN 1052:2008-12) abzuleiten. Hinsichtlich der Umweltbedingungen finden die auf der Baustelle geltenden, nationalen Rechtsvorschriften Anwendung.

Die Schrauben sind für die Verwendung in Verbindungen mit ruhender oder vorwiegend ruhender Belastung vorgesehen.

Zinkbeschichtete Schrauben sind für die Verwendung in Holzkonstruktionen unter trockenen Innenraumbedingungen wie in den Nutzungsklassen 1 und 2 der EN 1995-1-1:2008 (Eurocode 5) definiert, vorgesehen.

Aus Edelstahl gefertigte Schrauben erfüllen die Anforderungen des Eurocode 5 (EN 1995-1-1:2008) für die Verwendung in Konstruktionen, die gemäß Definition in Nutzungsklasse 3 feuchten Bedingungen ausgesetzt sind.

Der Anwendungsbereich der Schrauben hinsichtlich Korrosionsbeständigkeit ist nach den nationalen Vorschriften für Umweltbedingungen am Einbauort zu definieren.

Die Bestimmungen dieser Europäischen Technischen Bewertung beruhen auf der Annahme einer vorgesehenen Nutzungsdauer der Schrauben von 50 Jahren.

Die Angaben zur Nutzungsdauer können nicht als eine Garantie des Herstellers ausgelegt werden, sondern dienen lediglich als Hilfsmittel zur Auswahl der geeigneten Produkte im Hinblick auf die erwartete, wirtschaftlich vernünftige Nutzungsdauer des Bauwerks.

Leistung des Produkts und Verweise auf die Bewertungsverfahren

Merkmal	Beurteilung des Merkmals
3.1 Mechanische Beständigkeit und Stabilität*) (BWR1)	
Zugtragfähigkeit Schrauben aus Kohlenstoffstahl	Charakteristischer Wert $f_{tens,k}$: Schraube d = 3,0 mm: 2,7 kN Schraube d = 3,5 mm: 3,7 kN Schraube d = 4,0 mm: 4,8 kN Schraube d = 4,5 mm: 6,0 kN Schraube d = 5,0 mm: 7,5 kN Schraube d = 6,0 mm: 10,7 kN Schraube d = 8,0 mm: 19,1 kN Schraube d = 10,0 mm: 29,8 kN Schraube d = 12,0 mm: 32,7 kN
Schrauben aus Edelstahl	Schraube d = 3,0 mm: 1,6 kN Schraube d = 3,5 mm: 2,1 kN Schraube d = 4,0 mm: 2,8 kN Schraube d = 4,5 mm: 3,5 kN Schraube d = 5,0 mm: 4,3 kN Schraube d = 6,0 mm: 6,2 kN Schraube d = 8,0 mm: 13,0 kN
Einschraubmoment	Verhältnis des charakteristischen Werts des Bruchdrehmoments zum mittleren Einschraubmoment: $f_{tor,k} / R_{tor,mean} \geq 1,5$
Bruchdrehmoment Schrauben aus Kohlenstoffstahl	Charakteristischer Wert $f_{tor,k}$: Schraube d = 3,0 mm: 1,3 Nm Schraube d = 3,5 mm: 2,0 Nm Schraube d = 4,0 mm: 3,0 Nm Schraube d = 4,5 mm: 4,3 Nm Schraube d = 5,0 mm: 6,0 Nm Schraube d = 6,0 mm: 9,5 Nm Schraube d = 8,0 mm: 25,0 Nm Schraube d = 10,0 mm: 40,0 Nm Schraube d = 12,0 mm: 55,0 Nm
Schrauben aus Edelstahl	Schraube d = 3,0 mm: 0,9 Nm Schraube d = 3,5 mm: 1,3 Nm Schraube d = 4,0 mm: 1,9 Nm Schraube d = 4,5 mm: 2,6 Nm Schraube d = 5,0 mm: 3,7 Nm Schraube d = 6,0 mm: 6,5 Nm Schraube d = 8,0 mm: 16,0 Nm
3.2 Sicherheit im Brandfall (BWR2)	
Brandverhalten	Die Schrauben bestehen aus Stahl der Euroklasse A1 gemäß EN 13501-1 und Verordnung der Kommission 2016/364.

Merkmal	Beurteilung des Merkmals
3.3 Hygiene, Gesundheit und Umwelt (BWR3)	
Beeinflussung der Luftqualität	Das Produkt enthält keine der in TR 034 vom Oktober 2015 **) angegebenen gefährlichen Stoffe und setzt auch keine solchen frei.
3.7 Nachhaltige Nutzung natürlicher Ressourcen (BWR7)	Keine Leistung festgelegt
3.8 Allgemeine Aspekte der Gebrauchstauglichkeit des Produkts	Die Schrauben weisen bei der Verwendung in Holzkonstruktionen, bei denen Holztypen gemäß Eurocode 5 und den Vorgaben der Nutzungsklassen 1, 2 und 3 zum Einsatz kommen, eine zufriedenstellende Haltbarkeit und Gebrauchstauglichkeit auf.
Identifikation	Siehe Anhang A

*) Siehe zusätzliche Angaben in den Abschnitten 3.9-3.12.

**) Zusätzlich zu den in dieser Europäischen Technischen Bewertung enthaltenen Sonderbestimmungen über gefährliche Stoffe können die Produkte im Geltungsbereich dieser Bewertung weiteren Anforderungen unterliegen (z. B. umgesetzter europäischer Gesetzgebung und nationalen Rechts- und Verwaltungsvorschriften). Für eine Einhaltung der Vorschriften der Bauproduktrichtlinie müssen auch diese Anforderungen erfüllt sein, wenn und wo sie bestehen.

3.9 Mechanische Beständigkeit und Stabilität

Die Tragfähigkeiten der „fischer Power-Fast“-Schrauben und „fischer-Holzbauschrauben“ gelten ebenfalls für die in Abschnitt 1 genannten Holzwerkstoffe, wenn auch nachstehend nur der Begriff Holz verwendet wird.

Der charakteristische Wert der Quertragfähigkeit und der charakteristische Wert der axialen Ausziehtragfähigkeit der „fischer Power-Fast“-Schrauben und der „fischer-Holzbauschrauben“ sollten bei Konstruktionen gemäß Eurocode 5 oder einer entsprechenden nationalen Norm verwendet werden.

Die Eindringtiefe des Gewindeteils ab Schraubenspitze muss $\ell_{ef} \geq 4 \cdot d$, betragen, wobei d der Gewindeaußendurchmesser der Schraube ist. Zur Befestigung von Sparren muss die Eindringtiefe ab Schraubenspitze mindestens 40 mm, $\ell_{ef} \geq 40$ mm betragen.

Etwaige für die tragenden Bauteile geltende ETA sind gegebenenfalls zu berücksichtigen.

Etwaige für die Holzwerkstoffplatten geltende ETA sind gegebenenfalls zu berücksichtigen.

Tragfähigkeit rechtwinklig zur Schraubenachse

Der charakteristische Wert der Quertragfähigkeit der „fischer Power-Fast“-Schrauben und „fischer-Holzbauschrauben“ ist nach EN 1995-1-1:2008 (Eurocode 5) mit dem Gewindeaußendurchmesser d als Nenndurchmesser der Schraube zu berechnen. Die Wirkung des Seileinhängeeffekts darf dabei berücksichtigt werden.

Der charakteristische Wert des Fließmoments ist wie folgt zu berechnen:

Schrauben aus Kohlenstoffstahl mit $3,0 \text{ mm} \leq d \leq 5,0 \text{ mm}$ und $12,0 \text{ mm}$:

$$M_{y,k} = 0,15 \cdot 500 \text{ (N/mm}^2\text{)} \cdot d^{2,6} \quad [\text{Nmm}]$$

Schrauben aus Kohlenstoffstahl mit $6,0 \text{ mm} \leq d \leq 10,0 \text{ mm}$:

$$M_{y,k} = 0,15 \cdot 600 \text{ (N/mm}^2\text{)} \cdot d^{2,6} \quad [\text{Nmm}]$$

Schrauben aus Edelstahl mit $3,0 \text{ mm} < d < 6,0 \text{ mm}$:

$$M_{y,k} = 0,15 \cdot 350 \text{ (N/mm}^2\text{)} \cdot d^{2,6} \quad [\text{Nmm}]$$

Schrauben aus Edelstahl mit $d = 8,0 \text{ mm}$:

$$M_{y,k} = 0,15 \cdot 400 \text{ (N/mm}^2\text{)} \cdot d^{2,6} \quad [\text{Nmm}]$$

Darin ist

d Gewindeaußendurchmesser [mm]

Die charakteristische Lochleibungsfestigkeit der Schrauben in nicht vorgebohrten Löchern folgt bei einem Winkel der Schraubenachse zur Faser von: $0^\circ \leq \alpha \leq 90^\circ$ aus:

$$f_{h,k} = \frac{0,082 \cdot \rho_k \cdot d^{-0,3}}{2,5 \cdot \cos^2 \alpha + \sin^2 \alpha} \quad [\text{N/mm}^2]$$

und folgt dementsprechend für Schrauben in vorgebohrten Löchern aus:

$$f_{h,k} = \frac{0,082 \cdot \rho_k \cdot (1 - 0,01 \cdot d)}{2,5 \cdot \cos^2 \alpha + \sin^2 \alpha} \quad [\text{N/mm}^2]$$

Darin sind

ρ_k charakteristische Rohdichte [kg/m^3];

d Gewindeaußendurchmesser [mm];

α Winkel zwischen Schraubenachse und Faserrichtung.

Die Lochleibungsfestigkeit von parallel zur Plattenebene von in Brettsperrholz eingedrehten Schrauben ergibt sich, unabhängig vom Winkel zwischen Schraubenachse und Faserrichtung

$0^\circ \leq \alpha \leq 90^\circ$ zu:

$$f_{h,k} = 20 \cdot d^{-0,5} \quad [\text{N/mm}^2]$$

Darin ist

d Gewindeaußendurchmesser [mm]

Die Lochleibungsfestigkeit von in der Seitenfläche von Brettsperrholz eingedrehten Schrauben sollte wie bei Bauteilen aus Vollholz auf Basis der charakteristischen Rohdichte der äußeren Lage berücksichtigt werden. Soweit relevant, ist der Winkel zwischen Kraftrichtung und Faserrichtung der äußeren Lage zu berücksichtigen.

Die Querkraft soll senkrecht zur Schraubenachse und parallel zur Seitenfläche des Bauteils aus Brettsperrholz wirken.

Axialer Auszieh Widerstand

Der charakteristische Wert des axialen Auszieh Widerstandes der „fischer Power-Fast“-Schrauben und der „fischer-Holzbauschrauben“ in Bauteilen aus Vollholz (Nadelholz sowie Esche, Buche oder Eiche), Brettschichtholz (Nadelholz und Laubholz, Esche, Buche oder Eiche) oder Furnierschichtholz (Nadelholz oder Laubholz Buche) oder Bauteilen aus Brettsperrholz bei einem Winkel von $0^\circ \leq \alpha \leq 90^\circ$ zur Faserrichtung oder in Egger Eurostrand OSB 4 TOP in einem Winkel von $\alpha=90^\circ$ zur Seitenfläche ist nach folgender Gleichung zu berechnen:

$$F_{ax,\alpha,Rk} = n_{ef} \cdot k_{ax} \cdot f_{ax,k} \cdot d \cdot \ell_{ef} \cdot \left(\frac{\rho_k}{350} \right)^{0,8} \quad [N]$$

Darin sind

$F_{ax,\alpha,Rk}$	Charakteristischer Auszieh Widerstand der Verbindung unter einem Winkel α zur Faserrichtung [N]
n_{ef}	Effektive Anzahl der Schrauben gemäß EN 1995-1-1 Geneigte Schrauben: $n_{ef} = \max \{ n^{0,9}; 0,9 \cdot n \}$
k_{ax}	Faktor zur Berücksichtigung des Winkels α zwischen Schraubenachse und Faserrichtung $k_{ax} = 1,0$ for $45^\circ \leq \alpha < 90^\circ$ $k_{ax} = 0,3 + \frac{0,7 \cdot \alpha}{45}$ for $0^\circ \leq \alpha < 45^\circ$
$f_{ax,k}$	Charakteristischer Ausziehparameter für Massivholz [N/mm ²] Schrauben $d = 3,0$ mm: $f_{ax,k} = 13,8$ N/mm ² Schrauben $d = 3,5$ mm: $f_{ax,k} = 13,4$ N/mm ² Schrauben $d = 4,0$ mm: $f_{ax,k} = 13,0$ N/mm ² Schrauben $d = 4,5$ mm: $f_{ax,k} = 12,6$ N/mm ² Schrauben $d = 5,0$ mm: $f_{ax,k} = 12,2$ N/mm ² Schrauben $d = 6,0$ mm: $f_{ax,k} = 11,6$ N/mm ² Schrauben $d \geq 8,0$ mm: $f_{ax,k} = 10,0$ N/mm ² für Egger Eurostrand OSB 4 TOP mit einer Mindestdicke $t=12$ mm und Schrauben $5,0\text{mm} \leq d \leq 10,0\text{mm}$: $f_{ax,k} = 10,0$ N/mm ²
d	Gewindeaußendurchmesser [mm]
ℓ_{ef}	Eindringtiefe des Gewindeteils ab Schraubenspitze gemäß EN 1995-1-1:2008 [mm]
α	Winkel zwischen Faserrichtung und Schraubenachse (°)
ρ_k	Charakteristische Rohdichte [kg/m ³], für Laubholz darf die angesetzte charakteristische Rohdichte 730 kg/m ³ nicht überschreiten

Bei Schrauben, angeordnet unter einem Winkel von weniger als 90° zwischen Schraubenachse und Faserrichtung, beträgt die Mindesteindringtiefe des Gewindeteils:

$$\ell_{ef} \geq \min (4 \cdot d / \sin \alpha; 20 \cdot d)$$

Bei Schrauben, die bei Bauteilen aus Brettsper Holz in mehr als eine Schicht eindringen, dürfen die verschiedenen Schichten entsprechend berücksichtigt werden.

Der Auszieh Widerstand wird durch den Kopfdurchzieh Widerstand der Schraube bzw. der Unterlegscheibe und der Zugtragfähigkeit der Schraube begrenzt.

Bei axial beanspruchten Schrauben unter Zugbelastung und einer äußeren Kraft parallel zur Schraubenachse gilt die in EN 1995-1-1, 8.7.2 (8) aufgeführte Regel.

Bei schräg angeordneten Schrauben in Holz-Holz- oder Stahl-Holz-Scherverbindungen, in denen die Schrauben in einem Winkel von $30^\circ \leq \alpha \leq 60^\circ$ zwischen Scherfläche und Schraubenachse angeordnet werden, ist die effektiv wirksame Zahl der Schrauben n_{ef} folgendermaßen zu bestimmen:

Für eine Reihe mit n parallel zur Lasteinwirkung angeordneten Schrauben ist die Tragfähigkeit unter Einbeziehung der effektiv wirksamen Anzahl der Befestigungselemente, n_{ef} , zu ermitteln, wobei

$$n_{ef} = \max \{ n^{0,9}; 0,9 \cdot n \}$$

und n die Anzahl der in einer Reihe geneigt angeordneten Schrauben beschreibt. Bei gekreuzt angeordneten Schraubenpaaren in Holz-Holz-Konstruktionen ist n die Anzahl der in einer Reihe gekreuzt angeordneten Schraubenpaare.

Bitte beachten:

Für Schrauben als Verbindung in nachgiebig verbundenen Balken oder Stützen bzw. bei der Befestigung von Aufdachdämmsystemen gilt $n_{ef} = n$

Kopfdurchzieh Widerstand

Der charakteristische Durchzieh Widerstand der „fischer Power-Fast“-Schrauben und der „fischer-Holzbauschrauben“ ist gemäß EN 1995-1-1:2008 nach folgender Gleichung zu ermitteln:

$$F_{ax,\alpha,Rk} = n_{ef} \cdot f_{head,k} \cdot d_h^2 \cdot \left(\frac{\rho_k}{350} \right)^{0,8} \quad [N]$$

Darin sind

$F_{ax,\alpha,Rk}$	der charakteristische Durchzieh Widerstand der Verbindung bei einem Winkel $\alpha \geq 30^\circ$ zur Faserrichtung [N]
n_{ef}	die effektiv wirksame Anzahl der Schrauben gemäß EN 1995-1-1 Geneigte Schrauben: $n_{ef} = \max \{ n^{0,9}; 0,9 \cdot n \}$ (siehe unter axialer Auszieh Widerstand)
$f_{head,k}$	der charakteristische Durchziehparameter [N/mm ²]
d_h	der Schraubenkopfdurchmesser [mm]
ρ_k	die charakteristische Rohdichte [kg/m ³], für Holzwerkstoffplatten $\rho_k = 380$ kg/m ³

Charakteristischer Durchziehparameter für Schrauben mit einem Schraubenkopfdurchmesser ≤ 21 mm in Verbindungen mit Holz und Holzwerkstoffen mit einer Dicke von über 20 mm:

$$f_{\text{head},k} = 12 \text{ N/mm}^2$$

Charakteristischer Durchziehparameter für Schrauben mit einem Schraubenkopfdurchmesser $21 \text{ mm} < d_h \leq 35$ mm in Verbindungen mit Holz und Holzwerkstoffen mit einer Dicke von über 20 mm:

$$f_{\text{head},k} = 10 \text{ N/mm}^2$$

Charakteristischer Durchziehparameter für Schrauben in Verbindungen mit Holzwerkstoffen mit einer Stärke zwischen 12 mm und 20 mm:

$$f_{\text{head},k} = 8 \text{ N/mm}^2$$

Schrauben in Verbindungen mit Holzwerkstoffen mit einer Dicke von unter 12 mm (Mindestdicke für Holzwerkstoffe beträgt $1,2 \cdot d$, wobei d den Gewindeaußendurchmesser beschreibt):

$$f_{\text{head},k} = 8 \text{ N/mm}^2$$

begrenzt auf $F_{\text{ax},\alpha,Rk} = 400 \text{ N}$

Der Schraubenkopfdurchmesser d_h muss größer sein als $1,8 d_s$, wobei d_s dem glatten Schraubenschaft bzw. dem Drahtdurchmesser entspricht. Ansonsten beträgt der charakteristische Durchzieh Widerstand $F_{\text{ax},\alpha,Rk} = 0$.

Außendurchmesser der Unterlegscheiben von $d_h > 35$ mm dürfen nicht berücksichtigt werden.

Die Mindeststärken der Holzwerkstoffplatten gemäß Abschnitt 3.9 sind einzuhalten.

In Stahl-Holz-Verbindungen ist der Durchzieh Widerstand nicht maßgebend.

Zugtragfähigkeit

Der charakteristische Wert der Zugtragfähigkeit $f_{\text{tens},k}$ der „fischer Power-Fast“-Schrauben und der „fischer-Holzbauschrauben“ beträgt:

Schrauben aus Kohlenstoffstahl:

Schraube $d = 3,0 \text{ mm}$:	2,7 kN
Schraube $d = 3,5 \text{ mm}$:	3,7 kN
Schraube $d = 4,0 \text{ mm}$:	4,3 kN
Schraube $d = 4,5 \text{ mm}$:	5,5 kN
Schraube $d = 5,0 \text{ mm}$:	6,8 kN
Schraube $d = 6,0 \text{ mm}$:	10,7 kN
Schraube $d = 8,0 \text{ mm}$:	19,1 kN
Schraube $d = 10,0 \text{ mm}$:	29,8 kN
Schraube $d = 12,0 \text{ mm}$:	32,7 kN

Schrauben aus Edelstahl:

Schraube $d = 3,0 \text{ mm}$:	1,6 kN
Schraube $d = 3,5 \text{ mm}$:	2,1 kN

Schraube $d = 4,0 \text{ mm}$: 2,8 kN

Schraube $d = 4,5 \text{ mm}$: 3,5 kN

Schraube $d = 5,0 \text{ mm}$: 4,3 kN

Schraube $d = 6,0 \text{ mm}$: 6,2 kN

Schraube $d = 8,0 \text{ mm}$: 13,0 kN

Bei Schrauben, die in Verbindungen mit Stahlplatten verwendet werden, muss die Abreißfestigkeit des Schraubenkopfes größer sein als die Zugfestigkeit der Schraube.

Beanspruchung auf Druck

Die charakteristische Tragfähigkeit auf Druck $F_{\text{ax},Rk}$ von „fischer Power-Fast“-Schrauben, deren Kopf lt. Anhang D zwischen zwei Aluminium- Stahl- oder Edelstahlplatten eingespannt ist, und deren Gewinde vollständig und senkrecht zur Faserrichtung des Holzes eingeschraubt ist, wird wie folgt ermittelt:

$$F_{\text{ax},Rk} = \min \left\{ f_{\text{ax},k} \cdot d \cdot \ell_{\text{ef}} \cdot \left(\frac{\rho_k}{350} \right)^{0,8} ; \kappa_c \cdot N_{\text{pl},k} \right\} \quad [\text{N}]$$

hierin gilt

$$\kappa_c = \begin{cases} 1 & \text{for } \bar{\lambda}_k \leq 0,2 \\ \frac{1}{k + \sqrt{k^2 - \bar{\lambda}_k^2}} & \text{for } \bar{\lambda}_k > 0,2 \end{cases}$$

$$k = 0,5 \cdot \left[1 + 0,49 \cdot (\bar{\lambda}_k - 0,2) + \bar{\lambda}_k^2 \right]$$

Der bezogene Schlankheitsgrad wird wie folgt ermittelt:

$$\bar{\lambda}_k = \sqrt{\frac{N_{\text{pl},k}}{N_{\text{ki},k}}}$$

wobei

$$N_{\text{pl},k} = \pi \cdot \frac{d_s^2}{4} \cdot f_{y,k} \quad [\text{N}]$$

der charakteristische Wert der plastischen Normalkraft-Tragfähigkeit des glatten Schaftbereichs ist.

$$N_{\text{ki},k} = \frac{\pi^2 \cdot EI_s}{\ell_{\text{ef}}^2} \quad [\text{N}]$$

ist die charakteristische ideal-elastische Knicklast.

Die charakteristische Streckgrenze für Schrauben aus Kohlenstoffstahl beträgt:

$$f_{y,k} = 1000 \quad [\text{N/mm}^2]$$

Die charakteristische Streckgrenze für Schrauben aus Edelstahlstahl beträgt:

$$f_{y,k} = 500 \quad [\text{N/mm}^2]$$

Der Elastizitätsmodul für Schrauben aus Kohlenstoffstahl beträgt:

$$E_s = 210000 \quad [\text{N/mm}^2]$$

Der Elastizitätsmodul für Schrauben aus Edelstahl beträgt:

$$E_s = 160000 \quad [\text{N/mm}^2]$$

Flächenträgheitsmoment:

$$I_s = \frac{\pi}{64} \cdot d_s^4 \quad [\text{mm}^4]$$

d_s = glatter Schaftdurchmesser [mm]

$\ell_{ef} = 0,7 \cdot \ell$ Knicklänge [mm]

ℓ = freie Schraubenlänge, entspricht dem aus dem Holzbauteil herausstehenden Teil der Schraube inklusive Schraubenkopf [mm]

Hinweis: Bei der Bestimmung des Bemessungswertes für die Tragfähigkeit auf Druckbeanspruchung muss beachtet werden, dass $f_{ax,d}$ mit k_{mod} und γ_M für Holz gemäß EN1995 zu ermitteln ist, während $N_{pl,d}$ mit $\gamma_{M,1}$ für Ausknicken des Stahls nach EN 1993 berechnet wird.

Schrauben mit kombinierter Quer- und Zugbeanspruchung

Bei Verschraubungen, die einer kombinierten axialen und Querbeanspruchung ausgesetzt sind, muss die folgende Bedingung erfüllt sein:

$$\left(\frac{F_{ax,Ed}}{F_{ax,Rd}} \right)^2 + \left(\frac{F_{la,Ed}}{F_{la,Rd}} \right)^2 \leq 1$$

Darin sind

$F_{ax,Ed}$ Bemessungswert der einwirkenden Last in

Achsrichtung der Schraube

$F_{la,Ed}$ Bemessungswert der einwirkenden Last rechtwinklig zur Schraubenachse

$F_{ax,Rd}$ Bemessungswert der Zugtragfähigkeit der

Schraube

$F_{la,Rd}$ Bemessungswert der Quertragfähigkeit der Schraube

Verschiebungsmodul

Der Verschiebungsmodul K_{ser} des Gewindeteils einer Schraube beträgt für den Grenzzustand der Gebrauchstauglichkeit unabhängig vom Winkel zur Faserrichtung:

$$C = K_{ser} = 780 \cdot d^{0,2} \cdot \ell_{ef}^{0,4} \quad [\text{N/mm}]$$

Darin sind

d Gewindeaußendurchmesser [mm]

ℓ_{ef} Eindringtiefe in das Holzbauteil [mm]

Befestigung von Aufdachdämmsystemen

„fischer Power-Fast“-Schrauben und „fischer-Holzbauschrauben“ mit einem Gewindeaußendurchmesser von $d = 6 \text{ mm}$, 8 mm , 10 mm und 12 mm können für die Befestigung von Aufdachdämmsystemen verwendet werden.

Die Dämmstoffdicke darf bis zu 400 mm betragen. Die Aufdachdämmung ist auf Sparren aus Vollholz oder Brettschichtholz oder Bauteilen aus Brettspertholz anzubringen und mittels parallel zu den Sparren angeordneter Konterlatten oder auf der Dämmschicht angebrachter Holzwerkstoffplatten zu befestigen. Dies gilt sinngemäß auch für die Dämmung vertikaler Fassaden.

Die Schrauben sind ohne Vorbohren in einem Arbeitsgang durch die Konterlatten oder -platten und den Dämmstoff in die Sparren einzuschrauben.

Der Winkel α zwischen der Schraubenachse und der Faserrichtung der Sparren sollte zwischen 30° und 90° betragen.

Die Latten müssen aus Vollholz (Nadelholz) gemäß EN 338:2003-04 bestehen. Die Mindestdicke der Latten beträgt 80 mm , die Mindestbreite 100 mm für Schrauben mit einem Gewindeaußendurchmesser $d = 12 \text{ mm}$. Die Mindestdicke der Latten beträgt 40 mm , die Mindestbreite 60 mm für Schrauben mit einem Gewindeaußendurchmesser $d = 10 \text{ mm}$. Für Schrauben mit einem Gewindeaußendurchmesser $d = 6 \text{ mm}$ und 8 mm beträgt die Mindestdicke der Latten 30 mm und die Mindestbreite 50 mm .

Als Alternative zu den Latten können, jeweils mit einer Mindestdicke von 20 mm , auch Sperrholzplatten gemäß EN 636, Spanplatten gemäß EN 312, Grobspanplatten des Typs OSB/3 und OSB/4 gemäß EN 300 oder ETA und Vollholzplatten gemäß EN 13353 verwendet werden.

Die Sparren müssen aus Vollholz (Nadelholz) gemäß EN 338, Brettschichtholz gemäß EN 14081, Brettspertholz, Furnierschichtholz gemäß EN 14374 oder ETA oder ähnlichen verleimten Holzbauteilen gemäß ETA bestehen und eine Mindestbreite von 60 mm aufweisen.

Der Dämmstoff muss einer ETA entsprechen.

Der Dämmstoff muss eine Druckspannung von mindestens $\sigma_{10\%} = 0,05 \text{ N/mm}^2$ bei 10% Stauchung gemäß EN 826:1996-05 aufweisen.

Die Befestigung des Dämmstoffs und der Konterlatten bzw. Platten kann anhand des in Anhang B dargestellten Statik-Modells rechnerisch erfasst werden. Die Latten bzw. Platten müssen eine ausreichende Festigkeit und Steifigkeit aufweisen. Der maximale Druck zwischen

Latten bzw. Platten und Dämmstoff darf $1,1 \cdot \sigma_{10\%}$ nicht übersteigen.

Der charakteristische Wert der axialen Ausziehtragfähigkeit der Schrauben bei Aufsparren- oder Fassadendämmung errechnet sich wie folgt:

$$F_{ax,\alpha,Rk} = \min \left\{ \begin{array}{l} k_{ax} * f_{ax,k} * d * l_{ef} * k_1 * k_2 * \left(\frac{\rho_k}{350} \right)^{0,8} \\ f_{head,k} * d_h^2 * \left(\frac{\rho_k}{350} \right)^{0,8} \\ f_{tens,k} \end{array} \right. \quad [N]$$

Darin sind

$F_{ax,\alpha,Rk}$	Charakteristischer Auszieh Widerstand der Verbindung bei einem Winkel α zur Faserrichtung [N]
k_{ax}	Faktor zur Berücksichtigung des Winkels zwischen Schraubenachse und Faserrichtung $k_{ax} = 1,0$ for $45^\circ \leq \alpha < 90^\circ$ $k_{ax} = 0,3 + \frac{0,7 \cdot \alpha}{45}$ for $0^\circ \leq \alpha < 45^\circ$
$f_{ax,k}$	Charakteristischer Ausziehparameter [N/mm ²]
d	Gewindeaußendurchmesser [mm]
l_{ef}	Eindringtiefe des Gewindeteils ab Schraubenspitze gemäß EN 1995-1-1:2008 [mm]
α	Winkel zwischen Faserrichtung und Schraubenachse ($\alpha \geq 30^\circ$)
k_1	$\min \{1; 220/t_{HI}\}$
k_2	$\min \{1; \sigma_{10\%}/0,12\}$
t_{HI}	Dämmstoffdicke [mm]
$\sigma_{10\%}$	Druckspannung des Dämmstoffs bei 10 % Stauchung [N/mm ²] $\sigma_{10\%} \geq 0,05$ N/mm ²
$f_{head,k}$	Charakteristischer Durchziehparameter [N/mm ²]
d_h	Außendurchmesser des Schraubenkopfes [mm]
ρ_k	Charakteristische Rohdichte [kg/m ³]
$f_{tens,k}$	Charakteristische Zugtragfähigkeit der Schraube [N]

Reibungskräfte sind bei der Ermittlung des charakteristischen Werts des Auszieh Widerstands der Schrauben nicht zu berücksichtigen.

Die Verankerung gegen Windsogkräfte sowie die Biegespannungen in den Konterlatten bzw. Platten sind bei der Bemessung zu berücksichtigen. Falls erforderlich können zusätzliche Schrauben senkrecht zur Faserrichtung der Sparren (Winkel $\alpha = 90^\circ$) eingeschraubt werden.

Zur Verankerung der Aufsparrendämmung sind die Schrauben gemäß Anhang B anzuordnen.

Der Schraubenabstand darf maximal $e_s = 1,75$ m betragen.

3.10 Aspekte betreffend der Leistungsbeständigkeit des Produkts

3.10.1 Korrosionsschutz in Nutzungsklasse 1, 2 und 3.

„fischer Power-Fast“-Schrauben und „fischer-Holzbauschrauben“ werden aus Kohlenstoffstahlendraht hergestellt. Aus Kohlenstoffstahl hergestellte Schrauben sind galvanisch verzinkt und gelb oder blau chromatiert. Die mittlere Dicke der Zinkschicht beträgt 5 μ m.

Angaben über die Güte der Schrauben aus Edelstahl sind bei der ETA-Danmark hinterlegt.

3.11 Allgemeine Aspekte zum Verwendungszweck des Produkts

Diese Schrauben werden gemäß den Bestimmungen dieser Europäischen Technischen Bewertung unter Anwendung des Herstellungsverfahrens hergestellt, welches in der technischen Dokumentation hinterlegt ist.

Der Einbau hat gemäß Eurocode 5 oder einer entsprechenden nationalen Norm zu erfolgen, es sei denn, nachstehend werden andere Festlegungen getroffen.

Die Einbauanleitungen der Firma fischerwerke GmbH & Co. KG sollten berücksichtigt werden.

Die Schrauben sind in tragenden Holzkonstruktionen zur Verbindung von Teilen aus Vollholz (Nadel- und Laubholz), Brettschichtholz (Nadel- und Laubholz), Brettsperrholz (Minstdurchmesser $d = 6,0$ mm, Nadel- und Laubholz), Furnierschichtholz (Nadel- und Laubholz) sowie ähnlich verleimten Holzbauteilen (Nadel- und Laubholz), Holzwerkstoffplatten und Stahlteilen bestimmt.

Die Schrauben können in tragenden Holzkonstruktionen zur Verbindung von Bauteilen gemäß einer etwaigen ETA des Bauteils verwendet werden, sofern gemäß der ETA des betreffenden Bauteils der Anbau an tragende Holzkonstruktionen mit Schrauben gemäß ETA zulässig ist.

Zudem können die Schrauben mit Durchmesser von 6 mm bis 12 mm zur Befestigung von Aufdach-Dämmsystemen auf Sparren oder zur Befestigung von Wärmedämmung an vertikalen Fassaden eingesetzt werden.

Bei Verbindungen in tragenden Holzkonstruktionen sind jeweils mindestens zwei Schrauben zu verwenden. Eine einzelne Schraube kann für tragenden Verbindungen verwendet werden, wenn die Eindringtiefe der Schraube einschließlich des glatten Schaftteils mindestens $20 \cdot d$ beträgt und die Schraube nur axial belastet wird. In

diesem Fall ist die Tragfähigkeit der einzelnen Schraube um 50% zu reduzieren.

Eine einzelne Schraube pro Verbindung kann auch verwendet werden, wenn das Bauteil mit mindestens zwei Schrauben angeschlossen ist und die Schrauben zur Befestigung von Schalungen, Latten (Trag- und Konterlatten) und Windrispen oder zur Befestigung von Sparren, Pfetten und dergleichen auf Bindern und Rähmen sowie von Querriegeln an Rahmenhölzern verwendet wird.

Die Mindesteindringtiefe in Bauteile aus Vollholz, Brettschichtholz oder Brettsperrholz beträgt $4 \cdot d$.

Holzwerkstoffplatten - ausgenommen Egger Eurostrand OSB 4 TOP - und Stahlbleche sollten nur auf der Seite des Schraubenkopfes angeordnet werden.

Holzwerkstoffplatten sollten eine Dicke von mindestens $1,2 \cdot d$ aufweisen. Zudem sollten bei folgenden Holzwerkstoffen die jeweiligen Minstdicken beachtet werden:

- Sperrholz, Faserplatten: 6 mm
- Spanplatten, OSB-Platten, zementgebundene Spanplatten: 8 mm
- Vollholzplatten: 12 mm

Für Bauteile nach ETA sind die Bedingungen der jeweils einschlägigen ETA zu berücksichtigen.

Werden Schrauben mit einem Gewindeaußendurchmesser von $d \geq 8$ mm in tragenden Holzkonstruktionen verwendet, so müssen das Vollholz, Brettschichtholz, Furnierschichtholz und ähnlich verleimte Bauteile aus Fichten-, Kiefern- oder Tannenholz bestehen. Dies gilt nicht für das Einschrauben in vorgebohrte Löcher.

Der Winkel zwischen der Schraubenachse und der Faserrichtung muss mindestens $\alpha = 0^\circ$ betragen.

Schrauben dürfen mit oder ohne Vorbohren in Nadelholz eingedreht werden. Die Schrauben sind nach Vorbohren in Laubholz mit einer maximalen Rohdichte von 730 kg/m^3 einzudrehen.

Die Durchmesser der Vorbohrung betragen:

Gewindeaußen- durchmesser	Bohrlochdurchmesser	
	Nadelholz	Laubholz
4,0	2,5	3,0
4,5	2,5	3,0
5,0	3,0	3,0
6,0	4,0	4,0
8,0	5,0	6,0
10,0	6,0	7,0

12,0	7,0	8,0
------	-----	-----

Bei Stahlteilen sind die Löcher mit einem angemessenen Durchmesser vorzubohren.

Für das Eindrehen der Schrauben ist ausschließlich das von der fischerwerke GmbH & Co. KG benannte Werkzeug zu verwenden.

In Verbindungen mit Senkkopfschrauben gemäß Anhang A1, A5, A6, A7, A11, A13 und A17 muss der Schraubenkopf bündig mit der Oberfläche des Anbauteils abschließen. Ein tieferes Versenken ist nicht zulässig.

Senkkopfschrauben aus Kohlenstoff- und Edelstahl nach Anhang A1, A2, A5, A6, A7, A11, A13, A14 und A17 können zusammen mit Unterlegscheiben gemäß Anhang A19 verwendet werden. Unterlegscheiben nach EN ISO 7094 können zusammen mit Unterlegscheiben nach Anhang A19 verwendet werden.

Schrauben nach Anhang A3, A4, A8, A9, A10, A12, A15, A16 und A18 können zusammen mit Unterlegscheiben nach EN ISO 7094 verwendet werden.

Unterlegscheiben aus Kohlenstoffstahl sollten zusammen mit Schrauben aus Kohlenstoffstahl, Unterlegscheiben aus Edelstahl zusammen mit Edelstahlschrauben verwendet werden. Die Unterlegscheiben müssen vollflächig anliegen.

Für Holzbauteile sind die in EN 1995-1-1:2008 (Eurocode 5) in Absatz 8.3.1.2 und Tabelle 8.2 angegebenen Mindeststrand- und Mindestachsabstände für Schrauben in vorgebohrten Löchern wie bei Nägeln in vorgebohrten Löchern einzuhalten. Dabei ist der Gewindeaußendurchmesser d anzusetzen.

EN 1995-1-1:2008 (Eurocode 5) gibt in Abschnitt 8.3.1.2 sowie in Tabelle 8.2 jeweils Mindestabstände für Schrauben ohne Vorbohren wie für Nägel ohne Vorbohren an.

Alternativ können die Mindeststrand- und Achsabstände von ausschließlich axial beanspruchten "fischer Power-Fast"-Schrauben in nicht vorgebohrten Bauteilen aus Vollholz (Nadel- und Laubholz), Brettschichtholz oder ähnlichen verleimten Holzbauteilen (Nadel- und Laubholz) mit einer Mindestdicke $t = 12 \cdot d$ und einer Mindestbreite von $8 \cdot d$ oder 60 mm (es gilt der jeweils höhere Wert) wie folgt ermittelt werden:

Achsabstand a_1 parallel zur Faserrichtung $a_1 = 5 \cdot d$
 Achsabstand a_2 senkrecht zur Faserrichtung $a_2 = 5 \cdot d$
 Abstand $a_{3,c}$ vom Schwerpunkt
 des im Holz eingedrehten Schraubenteils
 zum Hirnholzende $a_{3,c} = 9 \cdot d$
 Abstand $a_{4,c}$ vom Schwerpunkt
 des im Holz eingedrehten Schraubenteils

zum seitlichen Rand $a_{4,c} = 4 \cdot d$
 Der Achsabstand a_2 senkrecht zur Faserrichtung kann von $5 \cdot d$ auf $2,5 \cdot d$ verringert werden, sofern die Bedingung $a_1 \cdot a_2 \geq 25 \cdot d^2$ erfüllt ist.

Bei Bauteilen aus Douglasie sind die Mindestrand- und Achsabstände parallel zur Faserrichtung um 50 % zu vergrößern.

Der Mindestabstand zum beanspruchten oder unbeanspruchten Hirnholzende muss bei nicht vorgebohrten Löchern und Schrauben mit einem Gewindeaußendurchmesser von $d > 8$ mm sowie einer Holzdicke $t < 5 \cdot d$ mindestens $15 \cdot d$ betragen.

Der Mindestabstand zum unbeanspruchten Rand senkrecht zur Faserrichtung kann auch bei einer Holzdicke $t < 5 \cdot d$ auf $3 \cdot d$ verringert werden, sofern der Abstand der Schrauben in Faserrichtung und zum Hirnholzende mindestens $25 \cdot d$ beträgt.

Soweit in der technischen Spezifikation (ETA oder hEN) von Brettsperrholz keine anderen Vorgaben enthalten sind, lassen sich für Schrauben, die in die Seitenfläche von Bauteilen aus Brettsperrholz mit einer Mindestdicke $t = 10 \cdot d$ eingeschraubt werden, jeweils folgende Werte für die Mindestrand- und Achsabstände (vgl. Anhang C) ermitteln:

Achsabstand a_1 parallel zur Faser	$a_1 = 4 \cdot d$
Achsabstand a_2 senkrecht zur Faser	$a_2 = 2,5 \cdot d$
Abstand $a_{3,c}$ vom Schwerpunkt des im Holz eingedrehten Schraubenteils zum unbeanspruchten Hirnholzende der Decklage	$a_{3,c} = 6 \cdot d$
Abstand $a_{3,t}$ vom Schwerpunkt des im Holz eingedrehten Schraubenteils zum beanspruchten Hirnholzende der Decklage	$a_{3,t} = 6 \cdot d$
Abstand $a_{4,c}$ vom Schwerpunkt des im Holz eingedrehten Schraubenteils zur unbeanspruchten Schmalfäche	$a_{4,c} = 2,5 \cdot d$
Abstand $a_{4,t}$ vom Schwerpunkt des im Holz eingedrehten Schraubenteils zur beanspruchten Schmalfäche	$a_{4,t} = 6 \cdot d$

Soweit die technische Spezifikation (ETA oder hEN) für Brettsperrholz nichts anderes vorgibt, sind die Mindestrand- und Mindestachsabstände von in der Schmalfäche von Brettsperrholzteilen mit einer Mindestdicke von $t = 10 \cdot d$ und mit einer Mindesteindringtiefe rechtwinklig zur Schmalfäche von $10 \cdot d$ eingedrehten Schrauben wie folgt zu ermitteln (siehe Anhang C):

Achsabstand a_1 parallel zur Seitenfläche des Brettsperrholzes	$a_1 = 10 \cdot d$
Achsabstand a_2 senkrecht zur Seitenfläche	

des Brettsperrholzes	$a_2 = 4 \cdot d$
Abstand $a_{3,c}$ vom Schwerpunkt des im Holz eingedrehten Schraubenteils zur unbeanspruchten Schmalfäche	$a_{3,c} = 7 \cdot d$
Abstand $a_{3,t}$ vom Schwerpunkt des im Holz eingedrehten Schraubenteils bis zur beanspruchten Schmalfäche	$a_{3,t} = 12 \cdot d$
Abstand $a_{4,c}$ vom Schwerpunkt des im Holz eingedrehten Schraubenteils zur unbeanspruchten Seitenfläche	$a_{4,c} = 3 \cdot d$
Abstand $a_{4,t}$ vom Schwerpunkt des im Holz eingedrehten Schraubenteils zur beanspruchten Seitenfläche	$a_{4,t} = 6 \cdot d$

Bei gekreuzt angeordneten Schraubenpaaren beträgt der Mindestachsabstand der gekreuzten Schrauben $1,5 \cdot d$.


Die Mindestdicke der Holzbauteile beträgt $t = 24$ mm für Schrauben mit einem Gewindeaußendurchmesser $d < 8$ mm, $t = 30$ mm für Schrauben mit einem Gewindeaußendurchmesser $d = 8$ mm, $t = 40$ mm für Schrauben mit einem Gewindeaußendurchmesser $d = 10$ mm und $t = 80$ mm für Schrauben mit einem Gewindeaußendurchmesser $d = 12$ mm.

4 Bescheinigung und Überprüfung der Leistungsbeständigkeit (AVCP)

4.1 AVCP-System

Gemäß Entscheidung 97/176/EG der Europäischen Kommission ist das System zur Bewertung und Überprüfung der Leistungsbeständigkeit (siehe Anhang V der Verordnung (EU) Nr. 305/2011) 3.

Schraubengrößen und Material

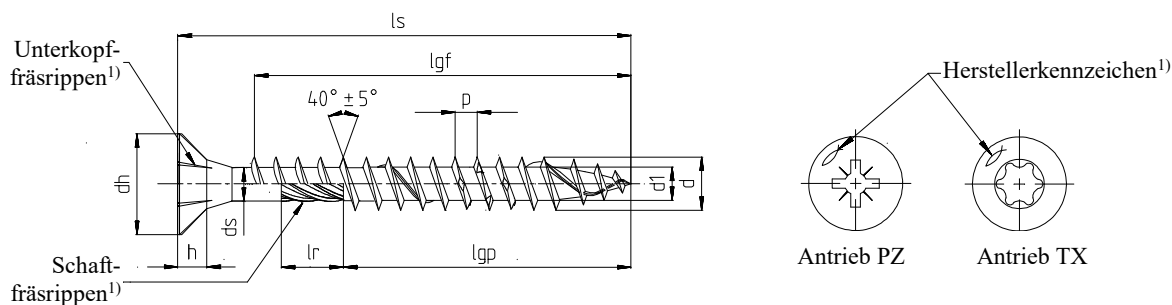

¹) optional

Power-Fast selbstbohrende Schraube - Senkkopfschraube mit Voll- oder Teilgewinde

- Kohlenstoffstahl
- Mögliche Oberflächenbehandlungen: galvanisch verzinkt - gelb oder blau, galvanisch verzinkt - blau $\geq 12\mu\text{m}$, Bonuszink, brüniert, vernickelt, vermessingt


Nenndurchmesser		3,0	3,5	4,0	4,5	5,0	6,0								
d	Außendurchmesser	3,00	3,50	4,00	4,50	5,00	6,00								
	Zul. Abweichung	$\pm 0,30$													
d ₁	Kerndurchmesser	2,00	2,20	2,50	2,70	3,00	4,00								
	Zul. Abweichung	$-0,25 / +0,10$				$\pm 0,20$									
d _h	Kopfdurchmesser	6,00	7,00	8,00	9,00	10,00	12,00								
	Zul. Abweichung	$-0,50 / +0,10$													
d _s	Schaftdurchmesser	2,25	2,60	2,90	3,25	3,60	4,20								
	Zul. Abweichung	$-0,30 / +0,10$													
h	Kopfhöhe	1,90	2,10	2,50	2,70	3,00	3,80								
	Gewindesteigung	1,50	1,80	2,00	2,20	2,50	3,00-4,50								
p	Zul. Abweichung	$\pm 10\%$													
l _r ¹)	Schaftfräsrippenlänge	3,75	4,25	4,75	5,50	6,00	7,00								
	Zul. Abweichung	$\pm 0,75$				$\pm 1,00$									
Antrieb TX		10		20		20	25	30							
Antrieb PZ		1	2				3								
Schraubenlänge l _s		Standardgewindelänge l _{gf} = Vollgewinde l _{gp} = Teilgewinde Toleranz: $\pm 2,0$ ²)													
Nennmaß	min	max	l _{gf}	l _{gp}	l _{gf}	l _{gp}	l _{gf}	l _{gp}	l _{gf}	l _{gp}	l _{gf}	l _{gp}	l _{gf}	l _{gp}	
20	18,95	21,05	16		16		16		16						
25	23,75	26,25	21		21	18	20	18	20						
30	28,75	31,25	26	18	26	18	25	18	25	18	24				
35	33,50	36,50	31	24	31	24	30	24	30	24	29	24	28		
40	38,50	41,50	36	24	36	24	35	24	35	24	34	24	33	24	
45	43,50	46,50	41	30	41	30	40	30	40	30	39	30	38	30	
50	48,50	51,50			46	30	45	30	45	30	44	30	43	30	
55	53,50	56,50					50	36	50	36	49	36	48		
60	58,50	61,50						36		36		36	53	36	
70	68,50	71,50						42		42		42	63	42	
80	78,50	81,50					50		50			50	73	50	
90	88,25	91,75										60		60	
100	98,25	101,75										60		60	
110	108,25	111,75										70		70	
120	118,25	121,75										70		70	
in Abstufungen von 10 mm															
130-300	l _s - 2,00	l _s + 2,00												70	

Alle Maße in mm

- Zwischenlängen bei l_s sind möglich
- Schrauben mit Teilgewinde > 50 mm Länge mit Schaftfräsrippen
- Gewindelängen zwischen $4 \times d \leq l_g \leq l_{g\text{max}}$ sind möglich

- ²) $10 \text{ mm} \geq l_g \leq 18 \text{ mm} \triangleq \pm 1,5 \text{ mm}$
 $18 \text{ mm} \geq l_g \leq 30 \text{ mm} \triangleq \pm 1,7 \text{ mm}$

fischer Power-Fast und Holzbauschrauben	
Abmessungen und Werkstoff	

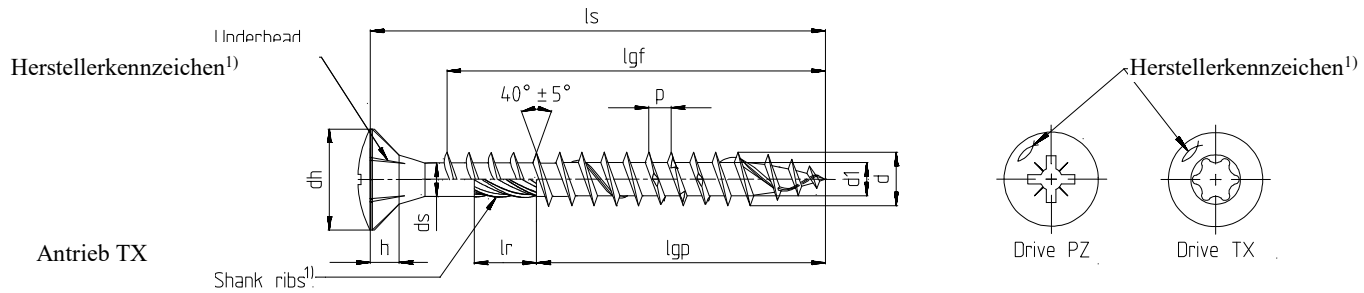

¹) optional

Power-Fast selbstbohrende Schraube - Linsensenkkopfschraube mit Voll- oder Teilgewinde



- Kohlenstoffstahl - Mögliche Oberflächenbehandlungen: galvanisch verzinkt - gelb oder blau, galvanisch verzinkt - blau $\geq 12\mu\text{m}$, Bonuszink, brüniert, vernickelt, vermessingt																					
Nenndurchmesser			3,0	3,5	4,0	4,5	5,0	6,0													
d	Außendurchmesser		3,00	3,50	4,00	4,50	5,00	6,00													
	Zul. Abweichung		$\pm 0,30$																		
d _l	Kerndurchmesser		2,00	2,20	2,50	2,70	3,00	4,00													
	Zul. Abweichung		$-0,25 / +0,10$				$\pm 0,20$														
d _h	Kopfdurchmesser		6,00	7,00	8,00	9,00	10,00	12,00													
	Zul. Abweichung		$-0,50 / +0,10$																		
d _s	Schaftdurchmesser		2,25	2,60	2,90	3,25	3,60	4,20													
	Zul. Abweichung		$-0,30 / +0,10$																		
h	Kopfhöhe		1,90	2,10	2,50	2,70	3,00	3,40													
p	Gewindesteigung		1,50	1,80	2,00	2,20	2,50	3,00-4,50													
	Zul. Abweichung		$\pm 10\%$																		
l _r ¹⁾	Schaftfräsrippenlänge		3,75	4,25	4,75	5,50	6,00	7,00													
	Zul. Abweichung		$\pm 0,75$				$\pm 1,00$														
Antrieb TX			10			20		20	25	30											
Antrieb PZ			1	2					3												
Schraubenlänge l _s			Standardgewindelänge l _{gf} = Vollgewinde l _{gp} = Teilgewinde Toleranz: $\pm 2,0^{2)}$																		
Nennmaß	min	max	l _{gf}	l _{gp}	l _{gf}	l _{gp}	l _{gf}	l _{gp}	l _{gf}	l _{gp}	l _{gf}	l _{gp}	l _{gf}	l _{gp}							
20	18,95	21,05	16		16		16		16												
25	23,75	26,25	21		21	18	20	18	20												
30	28,75	31,25	26	18	26	18	25	18	25	18	24										
35	33,50	36,50	31	24	31	24	30	24	30	24	29	24	28								
40	38,50	41,50	36	24	36	24	35	24	35	24	34	24	33	24							
45	43,50	46,50	41	30	41	30	40	30	40	30	39	30	38	30							
50	48,50	51,50			46	30	45	30	45	30	44	30	43	30							
55	53,50	56,50					50	36	50	36	49	36	48								
60	58,50	61,50						36		36		36	53	36							
70	68,50	71,50						42		42		42	63	42							
80	78,50	81,50						50		50		50	73	50							

Alle Maße in mm

- Zwischenlängen bei l_s sind möglich
- Schrauben mit Teilgewinde > 50 mm Länge mit Schaftfräsrippen
- Gewindelängen zwischen $4 \times d \leq l_g \leq l_{g\text{max}}$ sind möglich

²⁾ $10 \text{ mm} \geq l_g \leq 18 \text{ mm} \triangleq \pm 1,5 \text{ mm}$
 $18 \text{ mm} \geq l_g \leq 30 \text{ mm} \triangleq \pm 1,7 \text{ mm}$

fischer Power-Fast und Holzbauschrauben	
Abmessungen und Werkstoff	

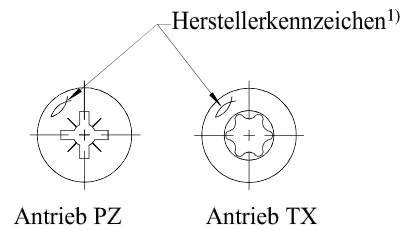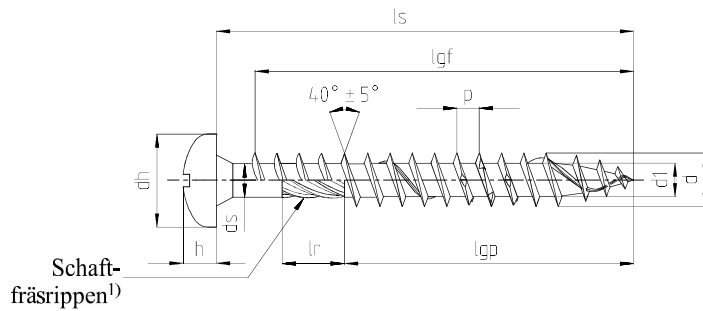

¹) optional

Power-Fast selbstbohrende Schraube – Pan head Schraube mit Voll- oder Teilgewinde


- Kohlenstoffstahl - Mögliche Oberflächenbehandlungen: galvanisch verzinkt - gelb oder blau, galvanisch verzinkt - blau $\geq 12\mu\text{m}$, Bonuszink, brüniert, vernickelt, vermessingt																						
Nenndurchmesser		3,0	3,5	4,0	4,5	5,0	6,0															
d	Außendurchmesser	3,00	3,50	4,00	4,50	5,00	6,00															
	Zul. Abweichung	$\pm 0,30$																				
d _i	Kerndurchmesser	2,00	2,20	2,50	2,70	3,00	4,00															
	Zul. Abweichung	$-0,25 / +0,10$					$\pm 0,20$															
d _h	Kopfdurchmesser	6,00	7,00	8,00	9,00	10,00	12,00															
	Zul. Abweichung	$-0,50 / +0,10$																				
d _s	Schaftdurchmesser	2,25	2,60	2,90	3,25	3,60	4,20															
	Zul. Abweichung	$-0,30 / +0,10$																				
h	Kopfhöhe	2,30	2,50	2,90	3,10	3,40	3,80															
	Gewindesteigung	1,50	1,80	2,00	2,20	2,50	3,00-4,50															
p	Zul. Abweichung	$\pm 10\%$																				
l _r ¹)	Schaftfräsrippenlänge	3,75	4,25	4,75	5,50	6,00	7,00															
	Zul. Abweichung	$\pm 0,75$					$\pm 1,00$															
Antrieb TX		10			20			20	25	30												
Antrieb PZ		1	2								3											
Schraubenlänge l _s		Standardgewindelänge l _{gf} = Vollgewinde l _{gp} = Teilgewinde Toleranz: $\pm 2,0$ ²)																				
Nennmaß	min	max	l _{gf}	l _{gp}	l _{gf}	l _{gp}	l _{gf}	l _{gp}	l _{gf}	l _{gp}	l _{gf}	l _{gp}	l _{gf}	l _{gp}								
20	18,95	21,05	16		16		16		16													
25	23,75	26,25	21		21	18	20	18	20													
30	28,75	31,25	26	18	26	18	25	18	25	18	24											
35	33,50	36,50	31	24	31	24	30	24	30	24	29	24	28									
40	38,50	41,50		24	36	24	35	24	35	24	34	24	33	24								
45	43,50	46,50		30		30	40	30	40	30	39	30	38	30								
50	48,50	51,50				30	45	30	45	30	44	36	43	30								
55	53,50	56,50					50	36	50	36	49	36	48									
60	58,50	61,50						36		36		42	53	36								
70	68,50	71,50						42		42		50	63	42								
80	78,50	81,50						50		50		50	73	50								
90	88,25	91,75										60		60								
100	98,25	101,75										60		60								

Alle Maße in mm

- Zwischenlängen bei l_s sind möglich
- Schrauben mit Teilgewinde > 50 mm Länge mit Schaftfräsrippen
- Gewindelängen zwischen $4 \times d \leq l_g \leq l_{g\text{max}}$ sind möglich

²) $10 \text{ mm} \geq l_g \leq 18 \text{ mm} \triangleq \pm 1,5 \text{ mm}$
 $18 \text{ mm} \geq l_g \leq 30 \text{ mm} \triangleq \pm 1,7 \text{ mm}$

fischer Power-Fast und Holzbauschrauben	
Abmessungen und Werkstoff	

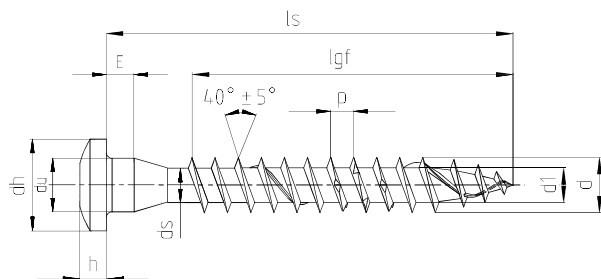Hersteller-
kennzeichen¹⁾

Antrieb TX

¹⁾ optional**Power-Fast selbstbohrende Schraube - Holzverbinderschraube mit Vollgewinde**

- Kohlenstoffstahl
- Mögliche Oberflächenbehandlungen: galvanisch verzinkt - gelb oder blau, galvanisch verzinkt - blau $\geq 12\mu\text{m}$, Bonuszink


Nenndurchmesser		5,0															
d	Außendurchmesser	5,00															
	Zul. Abweichung	-0,30															
d ₁	Kerndurchmesser	3,00															
	Zul. Abweichung	$\pm 0,20$															
d _u	Unterkopfdurchmesser	5,00															
	Zul. Abweichung	-0,35															
d _h	Kopfdurchmesser	8,25															
	Zul. Abweichung	$\pm 0,40$															
E	Höhe	2,50															
	Zul. Abweichung	$\pm 0,30$															
h	Kopfhöhe	2,60															
p	Gewindesteigung	2,50															
	Zul. Abweichung	$\pm 10\%$															
Antrieb TX		20	25														
Schraubenlänge l _s			Standardgewindelänge l _{gf} = Vollgewinde l _{gp} =Teilgewinde Toleranz: $\pm 2,0$ ²⁾														
Nennmaß	min	max	l _{gf}	l _{gp}													
20	18,95	21,05	14														
25	23,75	26,25	19														
30	28,75	31,25	24														
35	33,50	36,50	29														
40	38,50	41,50	34														
45	43,50	46,50	39														
50	48,50	51,50	44														
55	53,50	56,50	49														
60	58,50	61,50	54														
70	68,50	71,50	64														
80	78,50	81,50	74														

Alle Maße in mm

- Zwischenlängen bei l_s sind möglich
- Gewindelängen zwischen $4 \times d \leq l_g \leq l_{g\text{max}}$ sind möglich

²⁾ $10 \text{ mm} \geq l_g \leq 18 \text{ mm} \triangleq \pm 1,5 \text{ mm}$
 $18 \text{ mm} \geq l_g \leq 30 \text{ mm} \triangleq \pm 1,7 \text{ mm}$

fischer Power-Fast und Holzbauschrauben	
Abmessungen und Werkstoff	

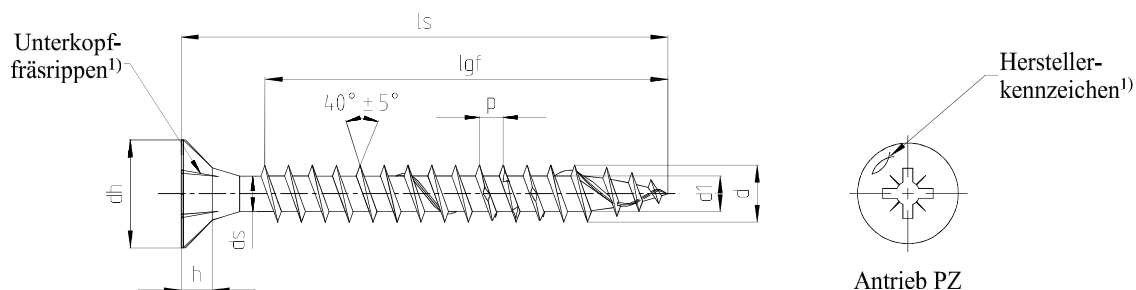

¹⁾ optional

Power-Fast selbstbohrende Schraube – Senkkopfschraube mit kleinem Kopf und Vollgewinde


- Kohlenstoffstahl - Mögliche Oberflächenbehandlungen: galvanisch verzinkt - gelb oder blau, galvanisch verzinkt - blau $\geq 12\mu\text{m}$																
Nenndurchmesser			3,0	3,5	4,0											
d	Außendurchmesser		3,00	3,50	4,00											
	Zul. Abweichung		$\pm 0,30$													
d ₁	Kerndurchmesser		2,00	2,20	2,50											
	Zul. Abweichung		$-0,25 / +0,10$													
d _h	Kopfdurchmesser		5,00	6,00	7,00											
	Zul. Abweichung		$-0,50 / +0,10$													
h	Kopfhöhe		1,90	2,10	2,50											
	Gewindesteigung		1,50	1,80	2,00											
p	Zul. Abweichung		$\pm 10\%$													
Antrieb PZ			1	2												
Schraubenlänge l _s			Standardgewindelänge l _{gf} = Vollgewinde l _{gp} =Teilgewinde Toleranz: $\pm 2,0$ ²⁾													
Nennmaß	min	max	l _{gf}	l _{gp}	l _{gf}	l _{gp}	l _{gf}	l _{gp}								
20	18,95	21,05	16		16		16									
25	23,75	26,25	21		21		20									
30	28,75	31,25	26													

Alle Maße in mm

- Zwischenlängen bei l_s sind möglich
- Gewindelängen zwischen $4 \times d \leq l_g \leq l_{g\text{max}}$ sind möglich

²⁾ $10 \text{ mm} \geq l_g \leq 18 \text{ mm} \triangleq \pm 1,5 \text{ mm}$
 $18 \text{ mm} \geq l_g \leq 30 \text{ mm} \triangleq \pm 1,7 \text{ mm}$

fischer Power-Fast und Holzbauschrauben	
Abmessungen und Werkstoff	

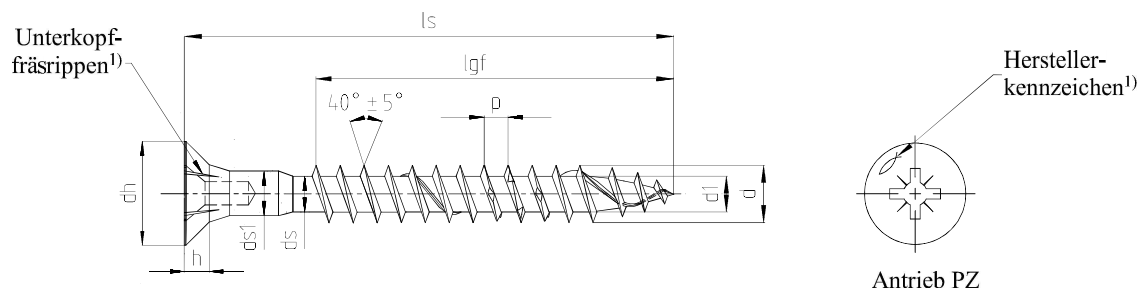

¹⁾ optional

Power-Fast selbstbohrende Schraube - Senkkopfschraube mit Kopflochbohrung und Vollgewinde


- Kohlenstoffstahl - Mögliche Oberflächenbehandlungen: galvanisch verzinkt - gelb oder blau, galvanisch verzinkt - blau $\geq 12\mu\text{m}$																
Nenndurchmesser		4,0	4,5	5,0	6,0											
d	Außendurchmesser	4,00	4,50	5,00	6,00											
	Zul. Abweichung	$\pm 0,30$														
d ₁	Kerndurchmesser	2,50	2,70	3,00	4,00											
	Zul. Abweichung	$-0,25 / +0,10$				$\pm 0,20$										
d _h	Kopfdurchmesser	8,00	9,00	10,00	12,00											
	Zul. Abweichung	$-0,50 / +0,10$														
d _s	Schaftdurchmesser	2,90	3,25	3,60	4,30											
	Zul. Abweichung	$-0,30 / +0,10$														
h	Kopfhöhe	2,50	2,70	3,00	3,80											
	Gewindesteigung	2,00	2,20	2,50	3,00-4,50											
p	Zul. Abweichung	$\pm 10\%$														
d _{s1}	Schaftdurchmesser	3,70	3,85	4,50	4,20											
	Zul. Abweichung	$-0,10$														
Antrieb PZ		2			3											
Schraubenlänge l _s		Standardgewindelänge l _{gf} = Vollgewinde l _{gp} = Teilgewinde Toleranz: $\pm 2,0$ ²⁾														
Nennmaß	min	max	l _{gf}	l _{gp}	l _{gf}	l _{gp}	l _{gf}	l _{gp}	l _{gf}	l _{gp}						
25	23,75	26,25	17,5													
27	25,75	28,25	19,5													
30	28,75	31,25	22,5		19											
35	33,50	36,50	27,5		24											
40	38,50	41,50	32,5		29		29									
45	43,50	46,50	37,5		34		34									
50	48,50	51,50	42,5		39		39		41							
55	53,50	56,50	47,5		44		44		46							
60	58,50	61,50	50,0		49		49		51							
70	68,50	71,50			59		60		60							
80	78,50	81,50			59		60		60							
90	88,25	91,75			59		60		60							
100	98,25	101,75					60		60							

Alle Maße in mm

- Zwischenlängen bei l_s sind möglich
- Gewindelängen zwischen $4 \times d \leq l_g \leq l_{g\text{max}}$ sind möglich

- ²⁾ $10 \text{ mm} \geq l_g \leq 18 \text{ mm} \triangleq \pm 1,5 \text{ mm}$
 $18 \text{ mm} \geq l_g \leq 30 \text{ mm} \triangleq \pm 1,7 \text{ mm}$

fischer Power-Fast und Holzbauschrauben	
Abmessungen und Werkstoff	

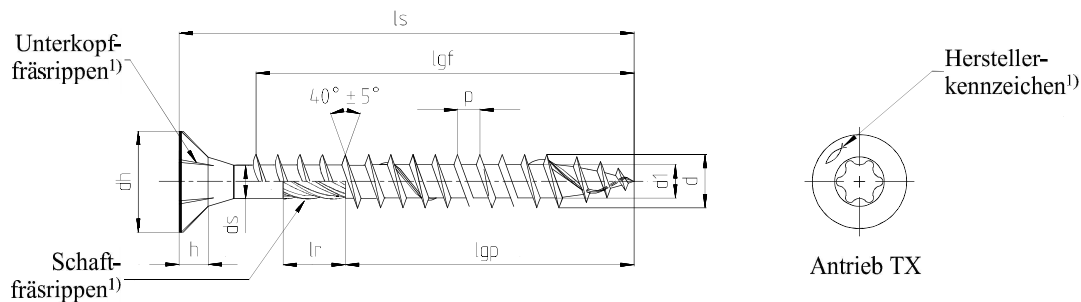

¹) optional


Power-Fast Holzbauschraube - Senkkopfschraube mit Voll- oder Teilgewinde

- Kohlenstoffstahl - Mögliche Oberflächenbehandlungen: galvanisch verzinkt - gelb oder blau, galvanisch verzinkt - blau $\geq 12\mu\text{m}$, Bonuszink																
Nenndurchmesser		6,0	8,0	10,0	12,0											
d	Außendurchmesser	6,00	8,00	10,00	12,00											
	Zul. Abweichung	$\pm 0,30$		$\pm 0,40$	$\pm 0,50$											
d _i	Kerndurchmesser	4,00	5,40	6,40	7,60											
	Zul. Abweichung	$\pm 0,20$			$\pm 0,30$											
d _h	Kopfdurchmesser	12,00	14,40	18,40	22,40											
	Zul. Abweichung	$-0,50 / +0,10$	$\pm 0,40$		$\pm 0,50$											
d _s	Schaftdurchmesser	4,30	5,90	7,10	8,30											
	Zul. Abweichung	$-0,30 / +0,10$	$\pm 0,20$													
h	Kopfhöhe	3,80	5,10	6,10	7,20											
	Gewindesteigung	3,00-4,50	6,00	7,50												
p	Zul. Abweichung	$\pm 10\%$														
l _r ¹)	Schaftfräsrippenlänge	8,00	13,00													
	Zul. Abweichung	$-2,00$														
Antrieb TX		30	40		50											
Schraubenlänge l _s		Standardgewindelänge l _{gf} = Vollgewinde l _{gp} =Teilgewinde Toleranz: $\pm 2,0$														
Nennmaß	min	max	l _{gf}	l _{gp}	l _{gf}	l _{gp}	l _{gf}	l _{gp}	l _{gf}	l _{gp}						
60	58,50	61,50	50	36												
80	78,50	81,50	70	50	70	50		52								
90	88,25	91,75		60	80	50										
100	98,25	101,75		60	80	50		52		60						
120	118,25	121,75		70	100	75		80		80						
140	138,00	142,00		70		75		80		80						
160	158,00	162,00		70		75		80		80						
180	178,00	182,00		70		75		100		100						
200	198,00	202,00		70		100		100		100						
220	218,00	222,00		70		100		100		100						
240	238,00	242,00		70		100		100		120						
260	258,00	262,00		70		100		100		120						
280	278,00	282,00		70		100		115		120						
300	298,00	302,00		70		100		115		120						
320	317,00	323,00				100		115								
330	327,00	333,00						115								
340	337,00	343,00				100		115								
350	347,00	353,00								145						
360	357,00	363,00				100		115								
380	377,00	383,00				100		115								
400	397,00	403,00														
450/500	l _s -3,00	l _s +3,00				100		115		145						
550/600	l _s -3,00	l _s +3,00								145						

Alle Maße in mm

- Zwischenlängen bei l_s sind möglich
- Gewindelängen zwischen $4 \times d \leq l_g \leq l_{g\text{max}}$ sind möglich

fischer Power-Fast und Holzbauschrauben	
Abmessungen und Werkstoff	

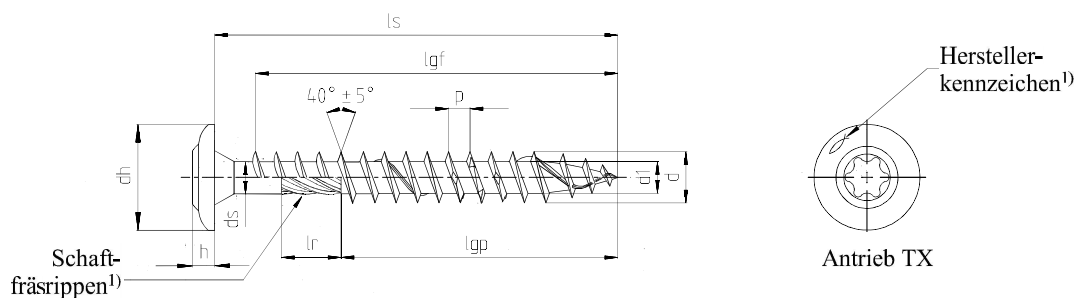¹⁾ optional


Power-Fast Holzbauschraube - Tellerkopfschraube mit Voll- oder Teilgewinde

- Kohlenstoffstahl - Mögliche Oberflächenbehandlungen: galvanisch verzinkt - gelb oder blau, galvanisch verzinkt - blau $\geq 12\mu\text{m}$, Bonuszink															
Nenndurchmesser			6,0	8,0	10,0	12,0									
d	Außendurchmesser		6,00	8,00	10,00	12,00									
	Zul. Abweichung		$\pm 0,30$		$\pm 0,40$	$\pm 0,50$									
d _i	Kerndurchmesser		4,00	5,40	6,40	7,60									
	Zul. Abweichung		$\pm 0,20$			$\pm 0,30$									
d _h	Kopfdurchmesser		13,70	21,00	24,70	27,90									
	Zul. Abweichung		-0,70/+1,30	$\pm 1,00$	-1,20/+2,80	-1,40/+2,60									
d _s	Schaftdurchmesser		4,30	5,90	7,10	8,30									
	Zul. Abweichung		-0,30/+0,10	$\pm 0,20$		$\pm 0,30$									
h	Kopfhöhe		3,50		5,60	6,70									
	Zul. Abweichung		$\pm 1,00$		$\pm 0,50$										
p	Gewindesteigung		3,00-4,50	6,00	7,50										
	Zul. Abweichung		$\pm 10\%$												
l _r ¹⁾	Schaftfräsrippenlänge		8,00	13,00											
	Zul. Abweichung		-2,00												
Antrieb TX			30	40		50									
Schraubenlänge l _s			Standardgewindelänge l _{gf} =Vollgewinde l _{gp} =Teilgewinde Toleranz: $\pm 2,0$												
Nennmaß	min	max	l _{gf}	l _{gp}	l _{gf}	l _{gp}	l _{gf}	l _{gp}	l _{gf}	l _{gp}					
60	58,50	61,50	50	36											
80	78,50	81,50	70	50	70	50		52							
90	88,25	91,75		60	80	50									
100	98,25	101,75		60	80	50		52		60					
120	118,25	121,75		70	100	75		80		80					
140	138,00	142,00		70		75		80		80					
160	158,00	162,00		70		75		80		80					
180	178,00	182,00		70		75		100		100					
200	198,00	202,00		70		100				100					
220	218,00	222,00		70		100		100		100					
240	238,00	242,00		70		100		100		100					
260	258,00	262,00		70		100		100		100					
280	278,00	282,00		70		100		115		120					
300	298,00	302,00		70		100		115		120					
320	317,00	323,00				100		115							
330	327,00	333,00						115							
340	337,00	343,00				100		115							
350	347,00	353,00								145					
in Abstufungen von 10 mm															
360-500	l _s -3,00	l _s +3,00				100		115							
in Abstufungen von 50 mm															
550-600	l _s -3,00	l _s +3,00								145					

Alle Maße in mm

- Zwischenlängen bei l_s sind möglich
- Gewindelängen zwischen $4 \times d \leq l_g \leq l_{g\text{max}}$ sind möglich

fischer Power-Fast und Holzbauschrauben	
Abmessungen und Werkstoff	

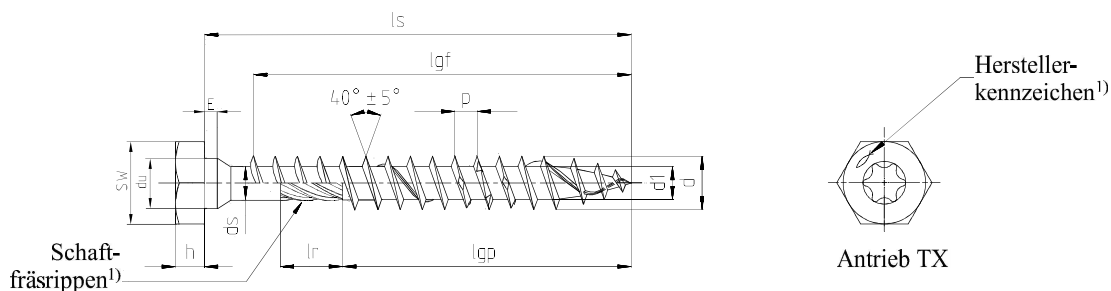

¹) optional

Power-Fast Holzbauschraube - Sechskantschraube mit Voll- oder Teilgewinde


- Kohlenstoffstahl - Mögliche Oberflächenbehandlungen: galvanisch verzinkt - gelb oder blau, galvanisch verzinkt - blau $\geq 12\mu\text{m}$, Bonuszink															
Nenndurchmesser		6,0	8,0	10,0	12,0										
d	Außendurchmesser	6,00	8,00	10,00	12,00										
	Zul. Abweichung	$\pm 0,30$		$\pm 0,40$	$\pm 0,50$										
d _i	Kerndurchmesser	4,00	5,40	6,40	7,60										
	Zul. Abweichung	$\pm 0,20$			$\pm 0,30$										
d _u	Unterkopfdurchmesser	6,25	8,25	10,30	12,40										
	Zul. Abweichung	$-0,80$		$-0,90$	$-1,00$										
SW	Schlüsselweite	9,90	12,80	14,80	16,80										
	Zul. Abweichung	$\pm 0,30$													
E	Höhe	2,00	2,10	2,30	3,30										
	Zul. Abweichung	$\pm 0,50$													
d _s	Schaftdurchmesser	4,30	5,90	7,10	8,30										
	Zul. Abweichung	$-0,30/+0,10$		$\pm 0,20$											
h	Kopfhöhe	4,00	4,50	5,20	5,70										
	Zul. Abweichung	$\pm 0,30$	$\pm 0,40$	$\pm 0,50$											
p	Gewindesteigung	3,00-4,50		6,00	7,50										
	Zul. Abweichung	$\pm 10\%$													
l _r ¹)	Schaftfräsrippenlänge	8,00		13,00											
	Zul. Abweichung	$-2,00$													
Antrieb TX		30	40		50										
Schraubenlänge l _s		Standardgewindelänge l _{gf} = Vollgewinde l _{gp} =Teilgewinde Toleranz: $\pm 2,0^{2)}$													
Nennmaß	min	max	l _{gf}	l _{gp}	l _{gf}	l _{gp}	l _{gf}	l _{gp}	l _{gf}	l _{gp}					
60	58,5	61,5	50	30											
80	78,5	81,5	70	50	70	50		52							
90	88,25	91,75		60	80	50									
100	98,25	101,75		60	80	50		52		60					
120	118,25	121,75		70	100	75		80		80					
140/160	l _s -2,00	l _s +2,00		70		75		80		80					
180	178,00	182,00		70		75		100		100					
200/220	l _s -2,00	l _s +2,00		70		100		100		100					
240/260	l _s -2,00	l _s +2,00		70		100		100		120					
280/300	l _s -2,00	l _s +2,00		70		100		115		120					
320	317,00	323,00				100		115							
330	327,00	333,00						115							
340	337,00	343,00				100		115							
350	347,00	353,00								145					
360/380	l _s -3,00	l _s +3,00				100		115							
in Abstufungen von 50 mm															
400-500	l _s -3,00	l _s +3,00				100		115		145					
550/600	l _s -3,00	l _s +3,00								145					

Alle Maße in mm

- Zwischenlängen bei l_s sind möglich
- Gewindelängen zwischen $4 \times d \leq l_g \leq l_{g\text{max}}$ sind möglich

²) $18 \text{ mm} \geq l_g \geq 30 \text{ mm} \triangleq \pm 1,7 \text{ mm}$

fischer Power-Fast und Holzbauschrauben	
Abmessungen und Werkstoff	

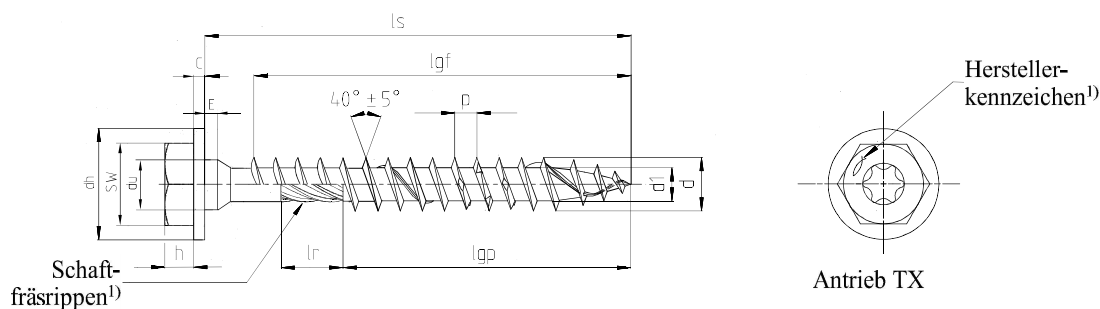

1) optional

Power-Fast Holzbauschraube - Sechskantschraube mit Scheibe und Voll- oder Teilgewinde

- Kohlenstoffstahl
- Mögliche Oberflächenbehandlungen: galvanisch verzinkt - gelb oder blau, galvanisch verzinkt - blau $\geq 12\mu\text{m}$, Bonuszink


Nenndurchmesser		6,0	8,0	10,0	12,0											
d	Außendurchmesser	6,00	8,00	10,00	12,00											
	Zul. Abweichung	$\pm 0,30$		$\pm 0,40$	$\pm 0,50$											
d _i	Kerndurchmesser	4,00	5,40	6,40	7,60											
	Zul. Abweichung	$\pm 0,20$			$\pm 0,30$											
d _h	Kopfdurchmesser	15,00	18,00	21,50	23,40											
	Zul. Abweichung	1,20		1,50												
d _u	Unterkopfdurchmesser	6,25	8,25	10,30	12,40											
	Zul. Abweichung	-0,80		-0,90	-1,00											
SW	Schlüsselweite	9,90	12,80	14,80	16,80											
	Zul. Abweichung	$\pm 0,30$														
c	Scheibenhöhe	1,80	2,00	2,20	2,50											
E	Höhe	2,00	2,10	2,30	3,30											
	Zul. Abweichung	$\pm 0,50$														
d _s	Schaftdurchmesser	4,30	5,90	7,10	8,30											
	Zul. Abweichung	-0,30/+0,10		$\pm 0,20$												
h	Kopfhöhe	4,00	4,50	5,20	5,70											
	Zul. Abweichung	$\pm 0,30$	$\pm 0,40$	$\pm 0,50$												
p	Gewindesteigung	3,00-4,50		6,00	7,50											
	Zul. Abweichung	$\pm 10\%$														
l _r ¹⁾	Schaftfräsrippenlänge	8,00		13,00												
	Zul. Abweichung	-2,00														
Antrieb TX		30	40	50												
Schraubenlänge l _s		Standardgewindelänge l _{gf} = Vollgewinde l _{gp} =Teilgewinde Toleranz: $\pm 2,0$ ²⁾														
Nennmaß	min	max	l _{gf}	l _{gp}	l _{gf}	l _{gp}	l _{gf}	l _{gp}	l _{gf}	l _{gp}						
60	58,50	61,50	50	30												
80	78,50	81,50	70	50	70	50		52								
90	88,25	91,75		60	80	50										
100	98,25	101,75		60	80	50		52		60						
120	118,25	121,75		70	100	75		80		80						
140/160	l _s -2,00	l _s +2,00		70		75		80		80						
180	178,00	182,00		70		75		100		100						
200/220	l _s -2,00	l _s +2,00		70		100		100		100						
240/260	l _s -2,00	l _s +2,00		70		100		100		120						
280/300	l _s -2,00	l _s +2,00		70		100		115		120						
320	317,00	323,00				100		115								
330	327,00	333,00						115								
340	337,00	343,00				100		115								
350	347,00	353,00								145						
360/380	l _s -3,00	l _s +3,00				100		115								
in Abstufungen von 50 mm																
400-500	l _s -3,00	l _s +3,00				100		115		145						
550/600	l _s -3,00	l _s +3,00								145						

Alle Maße in mm

- Zwischenlängen bei l_s sind möglich
- Gewindelängen zwischen $4 \times d \leq l_g \leq l_{g\text{max}}$ sind möglich

2) $18 \text{ mm} \geq l_g \geq 30 \text{ mm} \triangleq \pm 1,7 \text{ mm}$

fischer Power-Fast und Holzbauschrauben	
Abmessungen und Werkstoff	

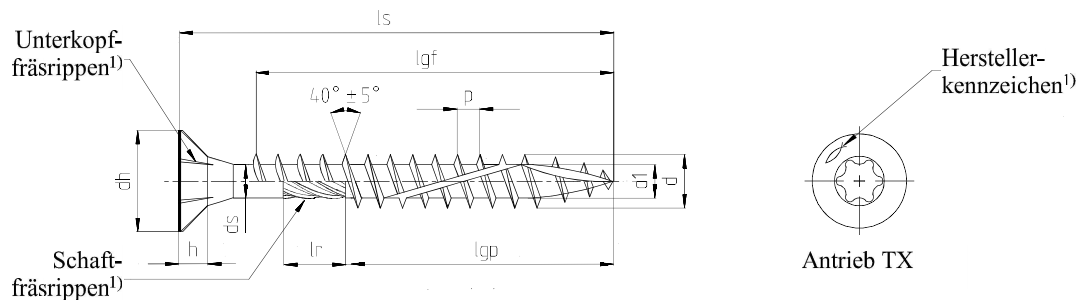

¹⁾ optional

FCS Holzbauschraube - Senkkopfschraube mit Voll- oder Teilgewinde


- Kohlenstoffstahl
- Mögliche Oberflächenbehandlungen: galvanisch verzinkt - gelb oder blau, galvanisch verzinkt - blau $\geq 12\mu\text{m}$, Bonuszink

Nenndurchmesser		8,0	10,0													
d	Außendurchmesser	8,00	10,00													
	Zul. Abweichung	$\pm 0,30$	$\pm 0,40$													
d _i	Kerndurchmesser	5,40	6,35													
	Zul. Abweichung	$-0,30/+0,20$														
d _h	Kopfdurchmesser	14,40	18,40													
	Zul. Abweichung	$\pm 0,40$														
d _s	Schaftdurchmesser	5,90	7,10													
	Zul. Abweichung	$-0,30/+0,10$														
h	Kopfhöhe	6,00-7,00	7,50-8,50													
	Gewindesteigung	5,20	5,60													
p	Zul. Abweichung	$\pm 10\%$														
l _r ¹⁾	Schaftfräsrippenlänge	13,0														
	Zul. Abweichung	$-2,00$														
Antrieb TX		40														
Schraubenlänge l _s				Standardgewindelänge l _{gf} = Vollgewinde l _{gp} =Teilgewinde Toleranz: $\pm 2,0$												
Nennmaß	min	max		l _{gf}	l _{gp}	l _{gf}	l _{gp}									
80	78,50	81,50		70	50		52									
90	88,25	91,75		80	50		52									
100	98,25	101,75		80	50		52									
110	108,25	111,75		100	75		80									
120	118,25	121,75			75		80									
in Abstufungen von 10 mm																
130-400	l _s -2,00	l _s +2,00			75		80									

Alle Maße in mm

- Zwischenlängen bei l_s sind möglich
- Gewindelängen zwischen $4 \times d \leq l_g \leq l_{g\text{max}}$ sind möglich

fischer Power-Fast und Holzbauschrauben	
Abmessungen und Werkstoff	

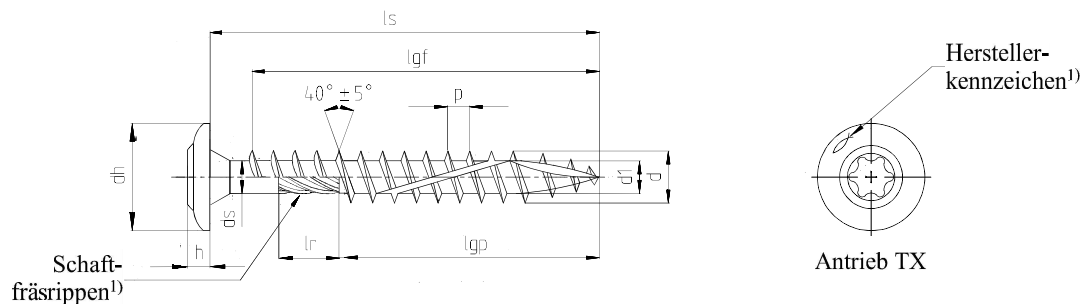

¹⁾ optional


FCS Holzbauschraube – Tellerkopfschraube mit Teilgewinde

- Kohlenstoffstahl - Mögliche Oberflächenbehandlungen: galvanisch verzinkt - gelb oder blau, galvanisch verzinkt - blau $\geq 12\mu\text{m}$																
Nenndurchmesser			8,0	10,0												
d	Außendurchmesser		8,00	10,00												
	Zul. Abweichung		-0,40/+0,30	$\pm 0,40$												
d _i	Kerndurchmesser		5,40	6,35												
	Zul. Abweichung		$\pm 0,30$													
d _h	Kopfdurchmesser		21,00	24,70												
	Zul. Abweichung		$\pm 1,00$	-1,20/+2,80												
d _s	Schaftdurchmesser		5,90	7,10												
	Zul. Abweichung		-0,30/+0,20													
h	Kopfhöhe		2,50-4,50	3,70-5,70												
p	Gewindesteigung		5,20	5,60												
	Zul. Abweichung		$\pm 10\%$													
l _r ¹⁾	Schaftfräsrippenlänge		12,00													
	Zul. Abweichung		$\pm 1,00$													
Antrieb TX			40													
Schraubenlänge l _s			Standardgewindelänge l _{gf} = Vollgewinde l _{gp} =Teilgewinde Toleranz: $\pm 2,0$													
Nennmaß	min	max	l _{gf}	l _{gp}	l _{gf}	l _{gp}										
80	78,50	81,50	70	50		52										
90	88,25	91,75	80	50		52										
100	98,25	101,75	80	50		52										
110	108,25	111,75	100	75		80										
120	118,25	121,75		75		80										
in Abstufungen von 10 mm																
130-400	l _s -2,00	l _s +2,00		75		80										

Alle Maße in mm

- Zwischenlängen bei l_s sind möglich
- Gewindelängen zwischen $4 \times d \leq l_g \leq l_{g\text{max}}$ sind möglich

fischer Power-Fast und Holzbauschrauben	
Abmessungen und Werkstoff	

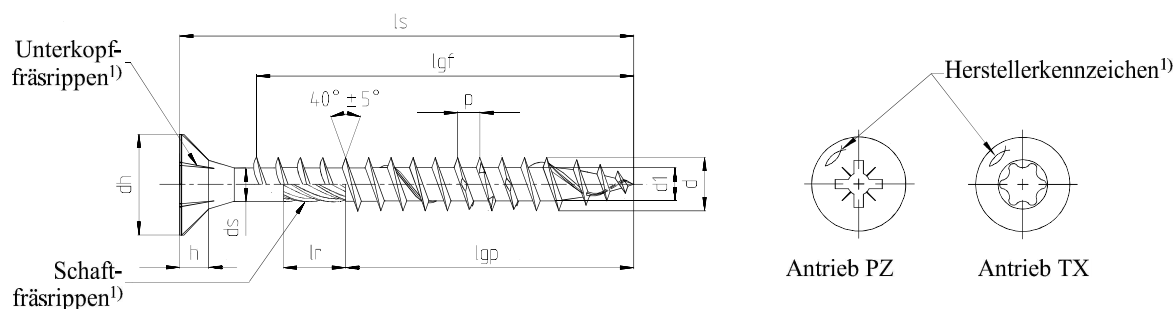

¹) optional

Power-Fast selbstbohrende Schraube - Senkkopfschraube mit Voll- oder Teilgewinde


■ Edelstahl																							
Nenndurchmesser		3,0	3,5	4,0	4,5	5,0	6,0																
d	Außendurchmesser	3,00	3,50	4,00	4,50	5,00	6,00																
	Zul. Abweichung	±0,30																					
d ₁	Kerndurchmesser	2,00	2,20	2,50	2,70	3,00	4,00																
	Zul. Abweichung	-0,25 / +0,10				±0,20																	
d _h	Kopfdurchmesser	6,00	7,00	8,00	9,00	10,00	12,00																
	Zul. Abweichung	-0,50 / +0,10																					
d _s	Schaftdurchmesser	2,25	2,60	2,90	3,25	3,60	4,30																
	Zul. Abweichung	-0,30 / +0,10																					
h	Kopfhöhe	1,90	2,10	2,50	2,70	3,00	3,80																
	Gewindesteigung	1,50	1,80	2,00	2,20	2,50	3,00-4,50																
p	Zul. Abweichung	±10%																					
l _r ¹)	Schaftfräsrippenlänge	3,75	4,25	4,75	5,50	6,00	7,00																
	Zul. Abweichung	±0,75				±1,00																	
Antrieb TX		10		20		20	25	30															
Antrieb PZ		1	2				3																
Schraubenlänge l _s			Standardgewindelänge l _{gf} = Vollgewinde l _{gp} =Teilgewinde Toleranz: ± 2,0²)																				
Nennmaß	min	max	l _{gf}	l _{gp}	l _{gf}	l _{gp}	l _{gf}	l _{gp}	l _{gf}	l _{gp}	l _{gf}	l _{gp}	l _{gf}	l _{gp}									
20	18,95	21,05	16		16		16		16														
25	23,75	26,25	21		21	18	20	18	20														
30	28,75	31,25	26	18	26	18	25	18	25	18	24												
35	33,50	36,50	31	24	31	24	30	24	30	24	29	24	28										
40	38,50	41,50	36	24	36	24	35	24	35	24	34	24	33	24									
45	43,50	46,50	41	30	41	30	40	30	40	30	39	30	38	30									
50	48,50	51,50			46	30	45	30	45	30	44	30	43	30									
55	53,50	56,50					50	36	50	36	49	36	48										
60	58,50	61,50						36		36		36	53	36									
70	68,50	71,50						42		42		42	63	42									
80	78,50	81,50						50		50		50	73	50									
90	88,25	91,75										60		60									
100	98,25	101,75										60		60									
110	108,25	111,75										70		70									
120	118,25	121,75										70		70									
in Abstufungen von 10 mm																							
130-300	l _s -2,00	l _s +2,00												70									

Alle Maße in mm

- Zwischenlängen bei l_s sind möglich
- Schrauben mit Teilgewinde > 50 mm Länge mit Schaftfräsrippen
- Gewindelängen zwischen 4×d ≤ l_g ≤ l_{gmax} sind möglich

²) 10 mm ≥ l_g ≤ 18 mm ≙ ±1,5 mm
 18 mm ≥ l_g ≤ 30 mm ≙ ±1,7 mm

fischer Power-Fast und Holzbauschrauben	
Abmessungen und Werkstoff	

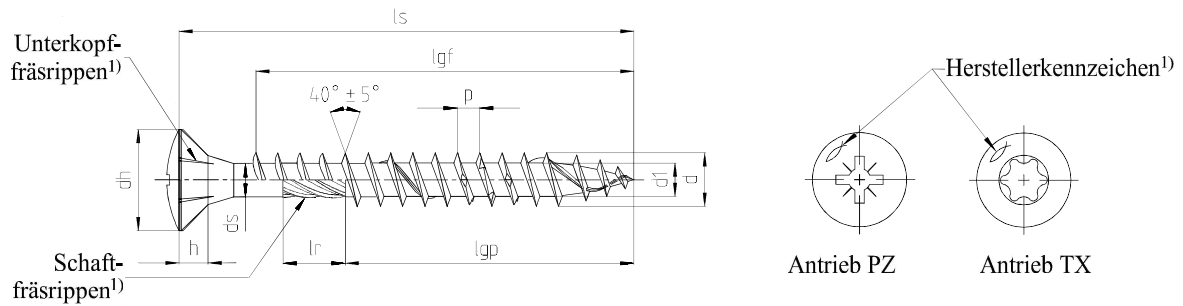¹⁾ optional**Power-Fast selbstbohrende Schraube - Linsensenkkopf mit Voll- oder Teilgewinde**



■ Edelstahl																	
Nenndurchmesser		3,0	3,5	4,0	4,5	5,0	6,0										
d	Außendurchmesser	3,00	3,50	4,00	4,50	5,00	6,00										
	Zul. Abweichung	±0,30															
d ₁	Kerndurchmesser	2,00	2,20	2,50	2,70	3,00	4,00										
	Zul. Abweichung	-0,25 / +0,10				±0,20											
d _h	Kopfdurchmesser	6,00	7,00	8,00	9,00	10,00	12,00										
	Zul. Abweichung	-0,50 / +0,10															
d _s	Schaftdurchmesser	2,25	2,60	2,90	3,25	3,60	4,30										
	Zul. Abweichung	-0,30 / +0,10															
h	Kopfhöhe	1,90	2,10	2,50	2,70	3,00	3,80										
p	Gewindesteigung	1,50	1,80	2,00	2,20	2,50	3,00-4,50										
	Zul. Abweichung	±10%															
l _r ¹⁾	Schaftfräsrippenlänge	3,75	4,25	4,75	5,50	6,00	7,00										
	Zul. Abweichung	±0,75				±1,00											
Antrieb TX		10		20		20	25	30									
Antrieb PZ		1	2				3										
Schraubenlänge l _s		Standardgewindelänge l _{gf} = Vollgewinde l _{gp} =Teilgewinde										Toleranz: ± 2,0 ²⁾					
Nennmaß	min	max	l _{gf}	l _{gp}	l _{gf}	l _{gp}	l _{gf}	l _{gp}	l _{gf}	l _{gp}	l _{gf}	l _{gp}	l _{gf}	l _{gp}			
20	18,95	21,05	16		16		16		16								
25	23,75	26,25	21		21	18	21	18	20								
30	28,75	31,25	26	18	26	18	26	18	25	18	24						
35	33,50	36,50	31	24	31	24	31	24	30	24	29	24	28				
40	38,50	41,50		24	36	24	36	24	35	24	34	24	33				
45	43,50	46,50		30		30	41	30	40	30	39	30	38				
50	48,50	51,50				30	46	30	45	30	44	30	43				
55	53,50	56,50						36		36		36					
60	58,50	61,50						36		36		36	53				
70	68,50	71,50						42		42		42	63				
80	78,50	81,50						50		50		50	73				

Alle Maße in mm

- Zwischenlängen bei l_s sind möglich
- Schrauben mit Teilgewinde > 50 mm Länge mit Schaftfräsrippen
- Gewindelängen zwischen 4×d ≤ l_g ≤ l_{gmax} sind möglich

- ²⁾ 10 mm ≥ l_g ≤ 18 mm ± ±1,5 mm
18 mm ≥ l_g ≤ 30 mm ± ±1,7 mm

fischer Power-Fast und Holzbauschrauben	
Abmessungen und Werkstoff	

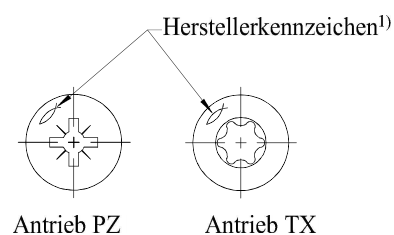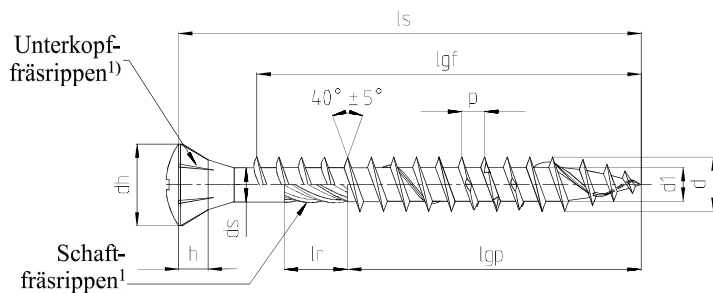

¹) optional

Power-Fast selbstbohrende Schraube - Fassadenschraube mit Voll- oder Teilgewinde



■ Edelstahl																											
Nenndurchmesser		4,0	4,5	5,0																							
d	Außendurchmesser	4,00	4,50	5,00																							
	Zul. Abweichung	±0,30																									
d _i	Kerndurchmesser	2,50	2,70	3,00																							
	Zul. Abweichung	-0,25 / +0,10																									
d _h	Kopfdurchmesser	6,90	6,90	7,80																							
	Zul. Abweichung	±0,50																									
d _s	Schaftdurchmesser	2,90	3,25	3,60																							
	Zul. Abweichung	-0,30 / +0,10																									
h	Kopfhöhe	2,50	2,70	3,00																							
	Gewindesteigung	2,00	2,20	2,50																							
p	Zul. Abweichung	±10%																									
l _r ¹)	Schaftfräsrippenlänge	4,75	5,50	6,00																							
	Zul. Abweichung	±0,75																									
Antrieb TX		20		20	25																						
Antrieb PZ		2																									
Schraubenlänge l _s		Standardgewindelänge l _{gf} = Vollgewinde l _{gp} = Teilgewinde Toleranz: ± 2,0 ²⁾																									
Nennmaß	min	max	l _{gf}	l _{gp}	l _{gf}	l _{gp}	l _{gf}	l _{gp}																			
20	18,95	21,05	16		16																						
25	23,75	26,25	21	18	20																						
30	28,75	31,25	26	18	25	18	24																				
35	33,50	36,50	31	24	30	24	29	24																			
40	38,50	41,50	36	24	35	24	34	24																			
45	43,50	46,50	41	30	40	30	39	30																			
50	48,50	51,50	46	30	45	30	44	30																			
55	53,50	56,50		36		36		36																			
60	58,50	61,50		36		36		36																			
70	68,50	71,50		42		42		42																			
80	78,50	81,50		50		50		50																			
90	88,25	91,75						60																			
100	98,25	101,75						60																			
110	108,25	111,75						70																			
120	118,25	121,75						70																			

Alle Maße in mm

- Zwischenlängen bei l_s sind möglich
- Schrauben mit Teilgewinde > 50 mm Länge mit Schaftfräsrippen
- Gewindelängen zwischen 4×d ≤ l_g ≤ l_{gmax} sind möglich

²⁾ 10mm ≥ l_g ≤ 18mm ≅ ±1,5mm
 18mm ≥ l_g ≤ 30mm ≅ ±1,7mm

fischer Power-Fast und Holzbauschrauben	
Abmessungen und Werkstoff	

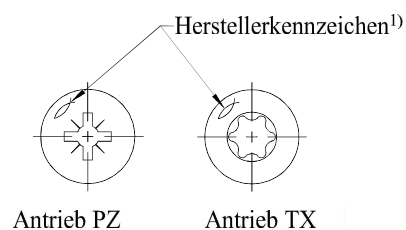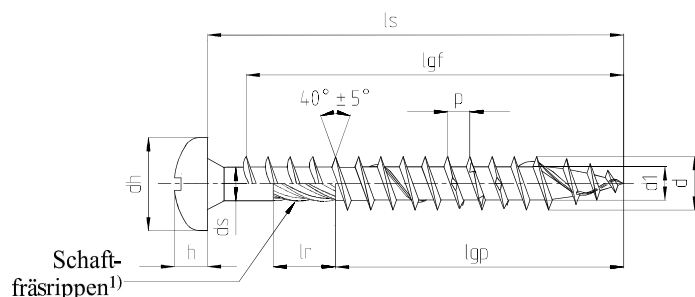

¹) optional

Power-Fast selbstbohrende Schraube – Pan head Schraube mit Voll- oder Teilgewinde


■ Edelstahl																					
Nenndurchmesser		3,0	3,5	4,0	4,5	5,0	6,0														
d	Außendurchmesser	3,00	3,50	4,00	4,50	5,00	6,00														
	Zul. Abweichung	±0,30																			
d ₁	Kerndurchmesser	2,00	2,20	2,50	2,70	3,00	4,00														
	Zul. Abweichung	-0,25 / +0,10					±0,20														
d _h	Kopfdurchmesser	6,00	7,00	8,00	9,00	10,00	12,00														
	Zul. Abweichung	-0,50 / +0,10																			
d _s	Schaftdurchmesser	2,25	2,60	2,90	3,25	3,60	4,30														
	Zul. Abweichung	-0,30 / +0,10																			
h	Kopfhöhe	2,30	2,50	2,90	3,10	3,40	3,80														
	Gewindesteigung	1,50	1,80	2,00	2,20	2,50	3,00-4,50														
p	Zul. Abweichung	±10%																			
l _r ¹)	Schaftfräsrippenlänge	3,75	4,25	4,75	5,50	6,00	7,00														
	Zul. Abweichung	±0,75					±1,00														
Antrieb TX		10			20			20	25	30											
Antrieb PZ		1	2										3								
Schraubenlänge l _s			Standardgewindelänge l _{gf} = Vollgewinde l _{gp} =Teilgewinde Toleranz: ± 2,0²)																		
Nennmaß	min	max	l _{gf}	l _{gp}	l _{gf}	l _{gp}	l _{gf}	l _{gp}	l _{gf}	l _{gp}	l _{gf}	l _{gp}	l _{gf}	l _{gp}							
20	18,95	21,05	16		16		16														
25	23,75	26,25	21		21	18	20	18	20												
30	28,75	31,25	26	18	26	18	25	18	25	18	24										
35	33,50	36,50	31	24	31	24	30	24	30	24	29	24	28								
40	38,50	41,50		24	36	24	35	24	35	24	34	24	33	24							
45	43,50	46,50		30		30	40	30	40	30	39	30	38	30							
50	48,50	51,50				30	45	30	45	30	44	36	43	30							
55	53,50	56,50					50	36	50	36	49	36	48								
60	58,50	61,50						36		36		42	53	36							
70	68,50	71,50						42		42		50	63	42							
80	78,50	81,50						50		50		50	73	50							
90	88,25	91,75										60		60							
100	98,25	101,75										60		60							

Alle Maße in mm

- Zwischenlängen bei l_s sind möglich
- Schrauben mit Teilgewinde > 50 mm Länge mit Schaftfräsrippen
- Gewindelängen zwischen 4×d ≤ l_g ≤ l_{gmax} sind möglich

²) 10 mm ≥ l_g ≤ 18 mm ≙ ±1,5 mm
 18 mm ≥ l_g ≤ 30 mm ≙ ±1,7 mm

fischer Power-Fast und Holzbauschrauben	
Abmessungen und Werkstoff	

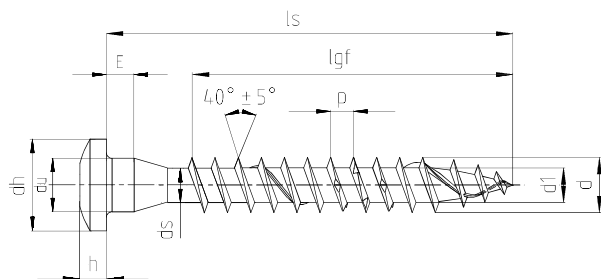Hersteller-
kennzeichen¹⁾

Antrieb TX

¹⁾ optional**Power-Fast selbstbohrende Schraube - Holzverbinderschraube mit Vollgewinde**



■ Edelstahl													
Nenndurchmesser		5,0											
d	Außendurchmesser	5,00											
	Zul. Abweichung	-0,30											
d _i	Kerndurchmesser	3,00											
	Zul. Abweichung	±0,20											
d _u	Unterkopfdurchmesser	5,00											
	Zul. Abweichung	-0,35											
d _h	Kopfdurchmesser	8,25											
	Zul. Abweichung	±0,40											
E	Höhe	2,50											
	Zul. Abweichung	±0,30											
h	Kopfhöhe	2,60											
	Zul. Abweichung	±0,40											
p	Gewindesteigung	2,50											
	Zul. Abweichung	±10%											
Antrieb TX		20	25										
Schraubenlänge l _s			Standardgewindelänge l _{gf} = Vollgewinde l _{gp} =Teilgewinde Toleranz: ± 2,0 ²⁾										
Nennmaß	min	max	l _{gf}	l _{gp}									
20	18,95	21,05	14										
25	23,75	26,25	19										
30	28,75	31,25	24										
35	33,50	36,50	29										
40	38,50	41,50	34										
45	43,50	46,50	39										
50	48,50	51,50	44										
55	53,50	56,50	49										
60	58,50	61,50	54										
70	68,50	71,50	64										
80	78,50	81,50	74										

Alle Maße in mm

- Zwischenlängen bei l_s sind möglich
- Gewindelängen zwischen 4×d ≤ l_g ≤ l_{gmax} sind möglich

- ²⁾ 10 mm ≥ l_g ≤ 18 mm ≙ ±1,5 mm
18 mm ≥ l_g ≤ 30 mm ≙ ±1,7 mm

fischer Power-Fast und Holzbauschrauben	
Abmessungen und Werkstoff	

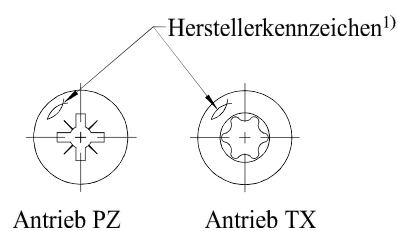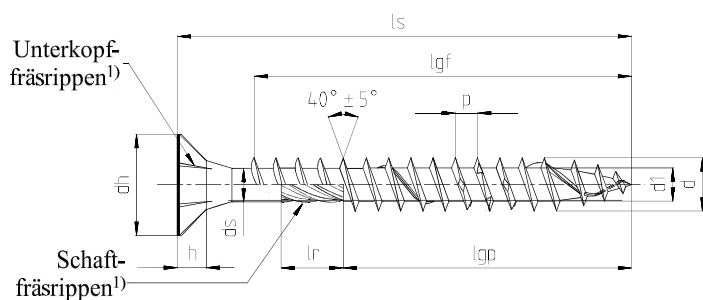¹⁾ optional


Power-Fast Holzbauschraube - Senkkopfschraube mit Voll- oder Teilgewinde

■ Edelstahl															
Nenndurchmesser		6,0	8,0												
d	Außendurchmesser	6,00	8,00												
	Zul. Abweichung	±0,30													
d ₁	Kerndurchmesser	4,00	5,40												
	Zul. Abweichung	±0,20													
d _h	Kopfdurchmesser	12,00	14,40												
	Zul. Abweichung	-0,50/+0,10	±0,40												
d _s	Schaftdurchmesser	4,30	5,90												
	Zul. Abweichung	-0,30/+0,10	±0,20												
h	Kopfhöhe	3,80	5,10												
p	Gewindesteigung	3,00-4,50	6,00												
	Zul. Abweichung	±10%													
l _r ¹⁾	Schaftfräsrippenlänge	7,00	13,00												
	Zul. Abweichung	±1,00	-2,00												
Antrieb TX		30	40												
Antrieb PZ		3	-												
Schraubenlänge l _s				Standardgewindelänge l _{gf} = Vollgewinde l _{gp} = Teilgewinde Toleranz: ± 2,0											
Nennmaß	min	max		l _{gf}	l _{gp}	l _{gf}	l _{gp}								
60	58,50	61,50		50	36										
80	78,50	81,50		70	50	70	50								
90	88,25	91,75			60	80	50								
100	98,25	101,75			60	80	50								
120	118,25	121,75			70	100	75								
140	138,00	142,00			70		75								
160	158,00	162,00			70		75								
180	178,00	182,00			70		75								
in Abstufungen von 20 mm															
200-300	l _s -2,00	l _s +2,00			70		100								
in Abstufungen von 20 mm															
320-500	l _s -3,00	l _s +3,00					100								

Alle Maße in mm

- Zwischenlängen bei l_s sind möglich
- Schrauben mit Teilgewinde > 50 mm Länge mit Schaftfräsrippen
- Gewindelängen zwischen 4×d ≤ l_g ≤ l_{gmax} sind möglich

fischer Power-Fast und Holzbauschrauben	
Abmessungen und Werkstoff	

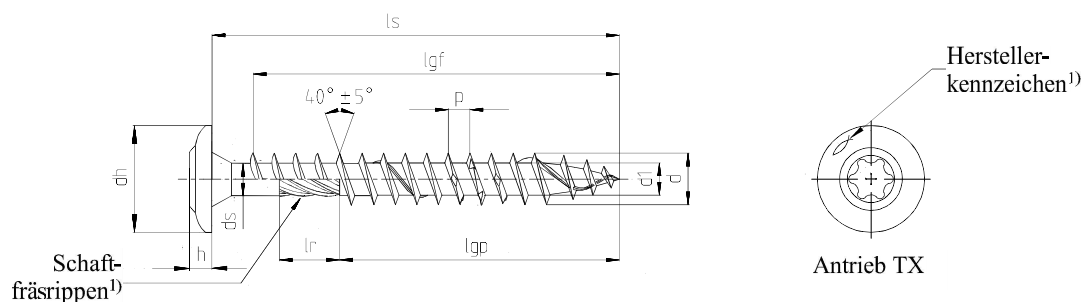

¹) optional


Power-Fast Holzbauschraube - Tellerkopfschraube mit Voll- oder Teilgewinde

Edelstahl																		
Nenndurchmesser			6,0	8,0														
d	Außendurchmesser		6,00	8,00														
	Zul. Abweichung		±0,30															
d ₁	Kerndurchmesser		4,00	5,40														
	Zul. Abweichung		-0,30/+0,20															
d _h	Kopfdurchmesser		13,70	21,00														
	Zul. Abweichung		-0,70/+1,30		±1,00													
d _s	Schaftdurchmesser		4,30	5,90														
	Zul. Abweichung		-0,30/+0,10															
h	Kopfhöhe		3,50															
	Zul. Abweichung		±1,00															
p	Gewindesteigung		3,00-4,50	6,00														
	Zul. Abweichung		±10%															
l _r ¹)	Schaftfräsrippenlänge		8,00	13,00														
	Zul. Abweichung		-2,00															
Antrieb TX			30	40														
Schraubenlänge l _s			Standardgewindelänge l _{gf} = Vollgewinde l _{gp} =Teilgewinde Toleranz: ± 2,0															
Nennmaß	min	max	l _{gf}	l _{gp}	l _{gf}	l _{gp}												
60	58,50	61,50	50	36														
80	78,50	81,50	70	50	70	50												
90	88,25	91,75		60	80	50												
100	98,25	101,75		60	80	50												
120	118,25	121,75		70	100	75												
140	138,00	142,00		70		75												
160	158,00	162,00		70		75												
180	178,00	182,00		70		75												
in Abstufungen von 20 mm																		
200-300	l _s -2,00	l _s +2,00		70		100												
in Abstufungen von 20 mm																		
200-300	l _s -3,00	l _s +3,00				100												

Alle Maße in mm

- Zwischenlängen bei l_s sind möglich
- Gewindelängen zwischen 4×d ≤ l_g ≤ l_{gmax} sind möglich

fischer Power-Fast und Holzbauschrauben	
Abmessungen und Werkstoff	

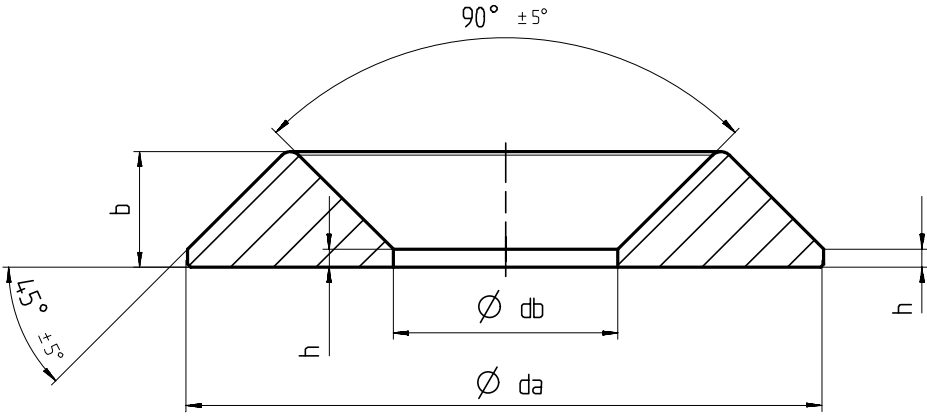


Scheibe für Power-Fast und Holzbauschrauben

▪ Kohlenstoffstahl - Mögliche Oberflächenbehandlungen: galvanisch verzinkt - gelb oder blau, galvanisch verzinkt - blau $\geq 12\mu\text{m}$, Bonuszink ▪ Edelstahl								
Nenndurchmesser		Typ 1				Typ 2		
Größe		6	8	10	12	6	8	10
db	Innendurchmesser	6,70	8,70	11,20	6,70	6,70	8,70	11,20
	Zul. Abweichung	-0,40						
da	Außendurchmesser	21	30	35	43	21	25,50	30,50
	Zul. Abweichung	$\pm 2,0$						
b	Höhe	4,70	5,20	6,20	8,30	4,70	5,20	6,20
	Zul. Abweichung	-0,40						
h	Höhe	1,50	1,80	2,00	2,20	1,50	1,80	2,00
	Zul. Abweichung	-0,15						

Alle Maße in mm

fischer Power-Fast und Holzbauschrauben	
Zubehör	

Befestigung von Aufdach-Dämmsystemen

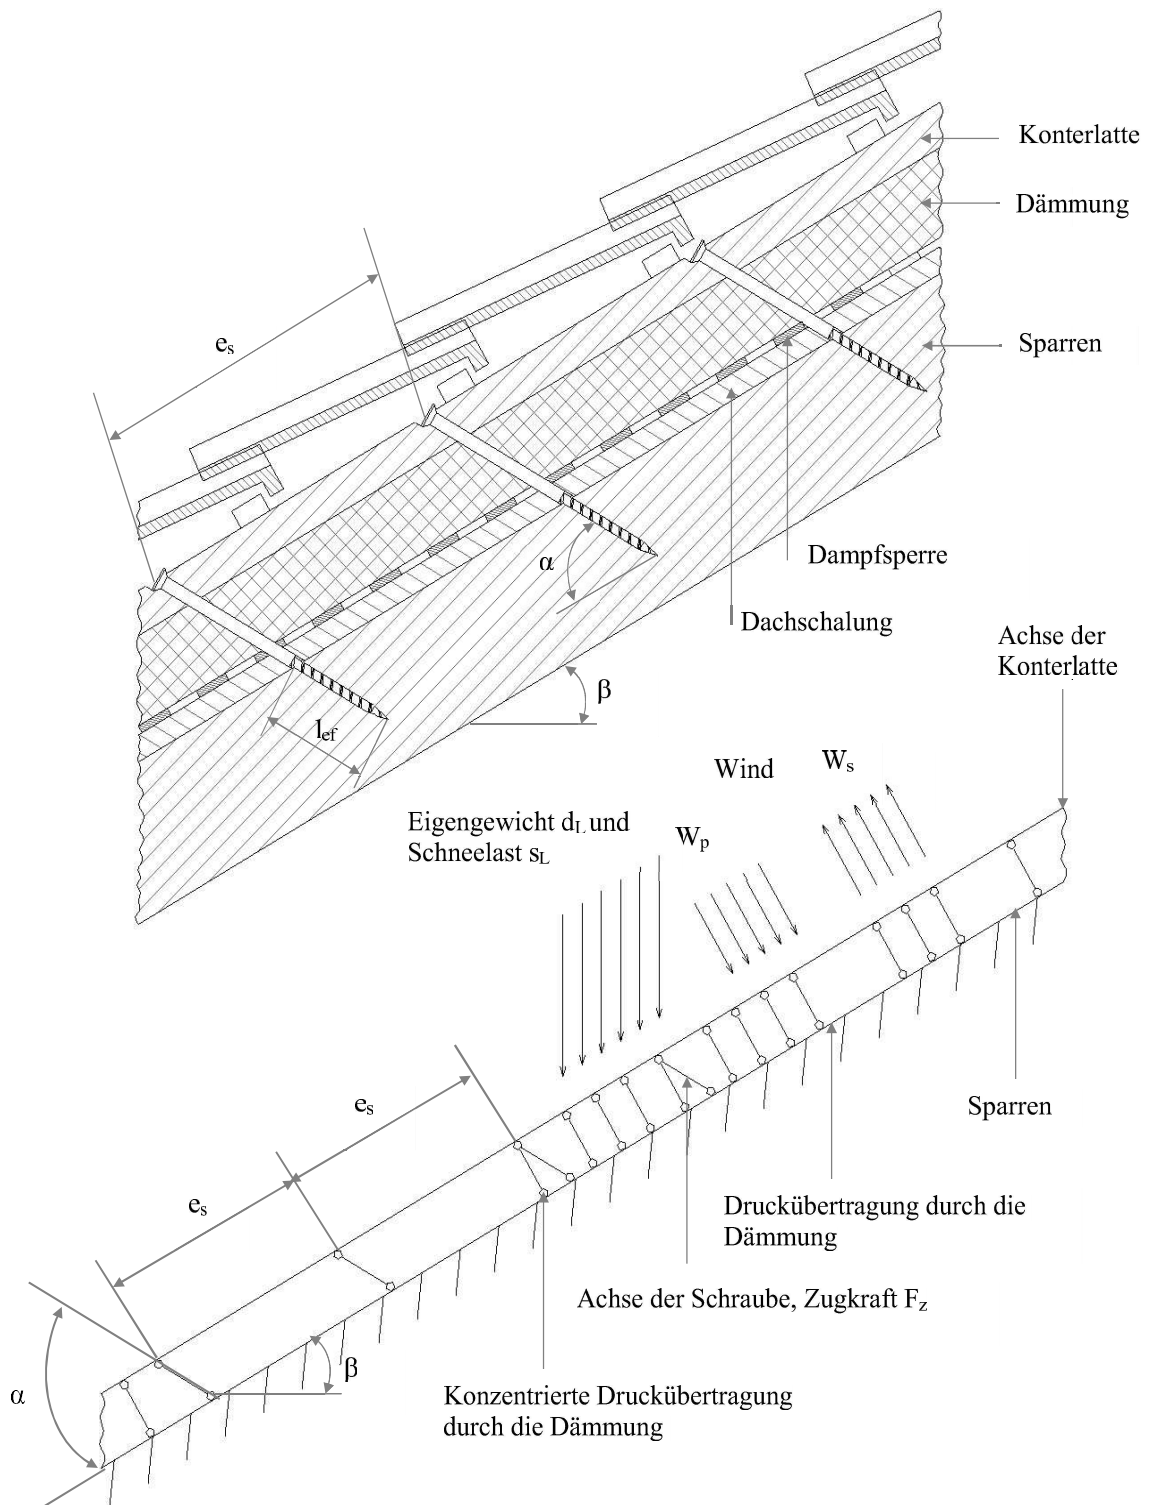


W_s	=	Windsog	W_p	=	Winddruck
e_s	=	Schraubenabstand	l_{ef}	=	Gewindeeinschraubtiefe im Sparren
β	=	Dachneigung	α	=	Winkel zwischen Schrauben- und Sparrenachse

fischer Power-Fast und Holzbauschrauben	
Bemessung	

Befestigung von Aufdach-Dämmsystemen

Punktlasten F_b senkrecht zu den Latten

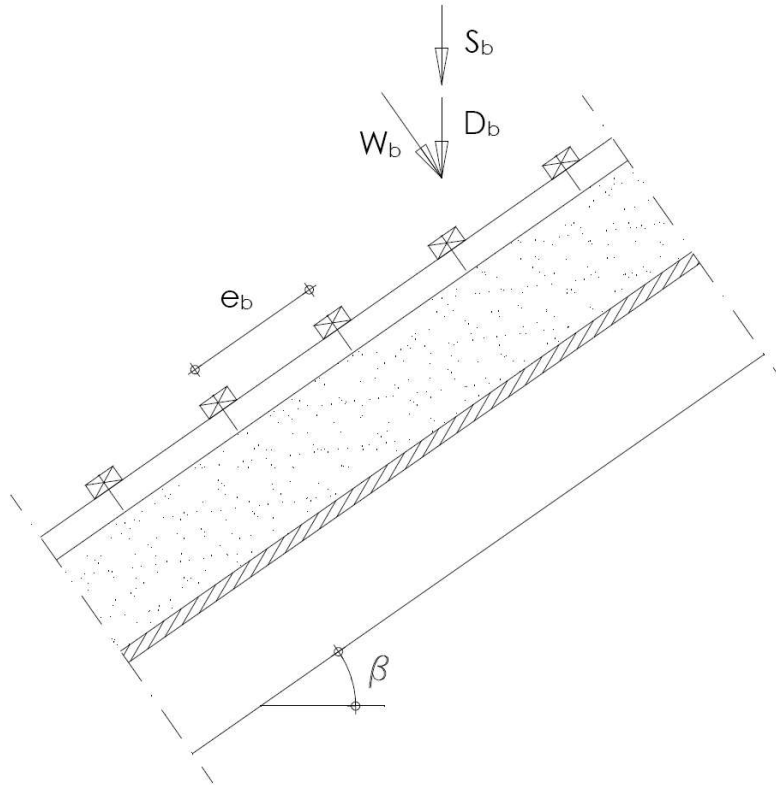

$$D_b = d \cdot e_b \cdot e_r$$

$$S_b = s \cdot e_b \cdot e_r \cdot \cos \beta$$

$$W_b = w_p \cdot e_b \cdot e_r$$

$$F_b = W_b + (D_b + S_b) \cdot \cos \beta$$

Darin sind

D_b = Punktlast aus Eigenlast

S_b = Punktlast aus Schneelast

W_b = Punktlast senkrecht zur Latte aus Windlast (Druck)

e_b = Lattenabstand

e_r = Sparrenabstand (=Konterlattenabstand)

s = Schneelast pro m^2 Grundfläche


w_p = Winddruck auf Dachfläche

d = Eigenlast pro m^2 Dachfläche

β = Dachneigung

fischer Power-Fast und Holzbauschrauben	
Bemessung	

Punktlasten F_s senkrecht zu den Latten durch die Schrauben

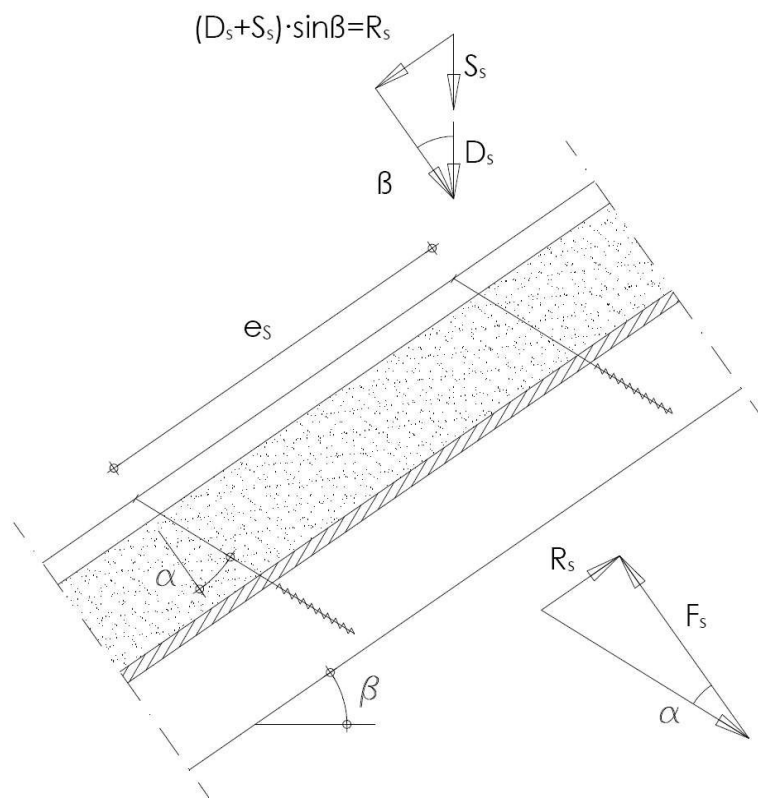

$$D_s = d \cdot e_s \cdot e_r$$

$$S_s = s \cdot e_s \cdot e_r \cdot \cos \beta$$

$$R_s = (D_s + S_s) \cdot \sin \beta$$

$$F_s = R_s / \tan \alpha$$

Darin sind

D_s = Punktlast aus Eigenlast

S_s = Punktlast aus Schneelast

R_s = Schublast des Dachs aus Eigenlast und Schneelast

e_s = Schraubenabstand

e_r = Sparrenabstand (=Konterlattenabstand)

α = Winkel zwischen Schraubenachse und der Senkrechten zur Sparrenachse

fischer Power-Fast und Holzbauschrauben

Bemessung

Bemessung der Konterlatten

Das Biegemoment errechnet sich aus :

$$M = \frac{(F_b + F_s) \cdot \ell_{\text{char}}}{4}$$

Darin sind :

$$\ell_{\text{char}} = \text{charakteristische Länge } \ell_{\text{char}} = \sqrt[4]{\frac{4 \cdot EI}{w_{\text{ef}} \cdot K}}$$

EI = Biegesteifigkeit der Konterlatte

K = Bettungsziffer

w_{ef} = Effektive Breite des Wärmedämmstoffs

F_b = Punktlasten senkrecht zur Latte

F_s = Punktlasten senkrecht zur Latte, Belastung im Schraubenkopfbereich

Die Bettungsziffer K kann aus dem Elastizitätsmodul E_{HI} und der Dicke t_{HI} der Wärmedämmung ermittelt werden, sofern die effektive Breite w_{ef} der Wärmedämmung unter Druck bekannt ist. Aufgrund der Lastausbreitung in der Wärmedämmung ist die effektive Breite w_{ef} größer als die Breite der Latte bzw. des Sparrens. Für weitere Berechnungen kann die effective Breite w_{ef} der Wärmedämmung wie folgt bestimmt werden:

$$w_{\text{ef}} = w + t_{\text{HI}} / 2$$

mit

w = Minimum aus der Breite der Konterlatte bzw. des Sparrens

t_{HI} = Dicke der Wärmedämmung

$$K = \frac{E_{\text{HI}}}{t_{\text{HI}}}$$

Folgende Bedingung muss dabei erfüllt werden :

$$\frac{\sigma_{m,d}}{f_{m,d}} = \frac{M_d}{W \cdot f_{m,d}} \leq 1$$

Bei Berechnung des Widerstandsmoments W ist der Nettoquerschnitt zu berücksichtigen.

Die Beanspruchung aus Schub ist wie folgt zu berechnen :

$$V = \frac{(F_b + F_s)}{2}$$

Folgende Bedingung muss dabei erfüllt werden :

$$\frac{\tau_d}{f_{v,d}} = \frac{1,5 \cdot V_d}{A \cdot f_{v,d}} \leq 1$$

Bei Berechnung der Querschnittfläche ist der Nettoquerschnitt zu berücksichtigen.

Bemessung der Wärmedämmung

Die Druckspannung in der Wärmedämmung ist wie folgt zu berechnen:

$$\sigma = \frac{1,5 \cdot F_b + F_s}{2 \cdot \ell_{\text{char}} \cdot w}$$

Der Bemessungswert der Druckspannung soll nicht größer als 110 % der Druckspannung bei 10 % Stauchung sein, berechnet nach EN 826.

fischer Power-Fast und Holzbauschrauben	
Bemessung	

Bemessung der Schrauben

Die Schrauben werden vorwiegend in Richtung der Schraubenachse beansprucht. Die axiale Zugkraft in der Schraube kann aus den Schubbeanspruchungen des Daches R_S berechnet werden.

$$T_S = \frac{R_S}{\cos \alpha}$$

Die Tragfähigkeit der in Achsrichtung beanspruchten Schrauben ist das Minimum aus den Bemessungswerten der axialen Tragfähigkeit auf Herausziehen des Schraubengewindes, der Kopfdurchziehtragfähigkeit der Schraube und der Zugtragfähigkeit der Schraube.

Um die Verformung des Schraubenkopfes bei einer Dicke der Wärmedämmung von über 200 mm bzw. einer Druckfestigkeit der Wärmedämmung unter 0,12 N/mm² zu begrenzen, ist die axiale Tragfähigkeit der Schrauben gegen Herausziehen mit den Faktoren k_1 und k_2 abzumindern :

$$F_{ax,\alpha,Rd} = \min \left\{ \begin{array}{l} k_{ax} * f_{ax,d} * d * l_{ef} * k_1 * k_2 * \left(\frac{\rho_k}{350} \right)^{0,8} \\ f_{head,d} * d_h^2 * \left(\frac{\rho_k}{350} \right)^{0,8} \\ f_{tens,d} \end{array} \right. \quad [N]$$

mit :

$f_{ax,d}$	Bemessungswert der Ausziehtragfähigkeit des Gewindeteils der Schraube
d	Gewindeaußendurchmesser der Schraube
l_{ef}	Einbindetiefe des Gewindeteils der Schraube im Sparren, $l_{ef} \geq 40$ mm
α	Winkel zwischen Faserrichtung und Schraubenachse ($\alpha \geq 30^\circ$)
ρ_k	Charakteristische Rohdichte des Holzbauteils [kg/m ³]
$f_{head,d}$	Bemessungswert der Kopfdurchziehtragfähigkeit der Schraube
d_h	Kopfdurchmesser
k_1	$\min \{1; 200/t_{HI}\}$
k_2	$\min \{1; \sigma_{10\%}/0,12\}$
t_{HI}	Dicke der Wärmedämmung [mm]
$\sigma_{10\%}$	Druckspannung der Wärmedämmung bei 10 % Stauchung [N/mm ²]
$f_{tens,d}$	Bemessungswert der Zugkraft der Schraube [N]

Wenn in o.e. Formel die Faktoren k_1 und k_2 erfüllt sind, muss die Verformung der Latten bei der Bemessung der Tragfähigkeit der Schrauben nicht berücksichtigt werden. Als Alternative zu den Latten können auch Platten mit einer Dicke von 20 mm aus Sperrholz gemäß EN 636 oder Europäischer Technischer Zulassung bzw. Bewertung oder nationalen jeweils am Einbauort geltenden Vorschriften, Spanplatten gemäß EN 312 oder ETA (Europäisch Technische Zulassung bzw. Bewertung) oder nationalen, jeweils am Einbauort geltenden Vorschriften, OSB-Platten gemäß EN 300 oder einer ETA oder nationalen, jeweils am Einbauort geltenden Vorschriften sowie Vollholzplatten gemäß EN 13353 oder einer ETA oder nationalen, jeweils am Einbauort geltenden Vorschriften oder aus Brettsperrholz gemäß einer ETA verwendet werden.

fischer Power-Fast und Holzbauschrauben	
Bemessung	

Wärmedämmstoff auf Sparren mit parallelen Schrauben senkrecht zur Dachebene

Alternativ zu den Latten können ebenfalls Platten mit einer Mindestdicke von 20 mm aus Sperrholz nach EN 636, Spanplatten nach EN 312, OSB / 3 und OSB / 4 nach EN 300 oder ETA und Massivholzplatten nach EN 13353 verwendet werden.

Charakteristische Tragfähigkeit einer Schraube unter Querbelastrung:

$$F_{v,Rk} = \min \left\{ \begin{array}{l} f_{h,b,k} \cdot d \cdot t_b \\ f_{h,r,k} \cdot d \cdot t_r \\ \frac{f_{h,b,k} \cdot d \cdot \beta}{1 + \beta} \cdot \left(\sqrt{4t_{il}^2 + \left(2 + \frac{1}{\beta}\right)t_b^2 + (2 + \beta)t_r^2 + 4t_{il}(t_b + t_r) + 2t_b t_r - 2t_{il} - t_b - t_r} \right) + \frac{F_{ax,Rk}}{4} \\ 1,05 \cdot \frac{f_{h,b,k} \cdot d \cdot \beta}{\frac{1}{2} + \beta} \cdot \left(\sqrt{t_{il}^2 + t_{il}t_b + \frac{t_b^2}{2} \left(1 + \frac{1}{\beta}\right) + \frac{M_{y,k}}{f_{h,b,k}d} \left(1 + \frac{2}{\beta}\right) - t_{il} - \frac{t_b}{2}} \right) + \frac{F_{ax,Rk}}{4} \\ 1,05 \cdot \frac{f_{h,b,k} \cdot d \cdot \beta}{\frac{1}{2} + \beta} \cdot \left(\sqrt{t_{il}^2 + t_{il}t_r + \frac{t_r^2}{2} (1 + \beta) + \frac{M_{y,k}}{f_{h,b,k}d} \left(2 + \frac{1}{\beta}\right) - t_{il} - \frac{t_r}{2}} \right) + \frac{F_{ax,Rk}}{4} \\ 1,15 \cdot \frac{f_{h,b,k} \cdot d}{1 + \beta} \cdot \left(\sqrt{\beta^2 t_{il}^2 + 4\beta(\beta + 1) \cdot \frac{M_{y,k}}{f_{h,b,k}d} - \beta t_{il}} \right) + \frac{F_{ax,Rk}}{4} \end{array} \right.$$

mit :


$f_{h,b,k}$	Charakteristische Lochleibungsfestigkeit der Konterlatte [N/mm ²]
$f_{h,r,k}$	Charakteristische Lochleibungsfestigkeit des Sparrens [N/mm ²]
β	$f_{h,r,k}/f_{h,b,k}$
d	Gewindeaußendurchmesser der Schraube [mm]
t_b	Lattendicke [mm]
t_r	Niedrigster Wert aus Sparrendicke oder Einbindetiefe der Schraube [mm]
t_{il}	Zwischenschichtdicke [mm]
$M_{y,k}$	Charakteristisches Fließmoment [Nmm]
$F_{ax,Rk}$	Maßgebende charakteristische Zugtragfähigkeit der Schraube [N]

fischer Power-Fast und Holzbauschrauben	
Bemessung	


Mindestrand- und Achsabstände

Schrauben unter Axial- oder Querbelastung in der Seitenfläche oder Schmalfläche von Brettsperrholz

Definition von Achs- und Randabständen sowie der Abstände untereinander in der Seitenfläche, sofern in der technischen Spezifikation (ETA oder hEN) für Brettsperrholz nicht anderslautend angegeben:

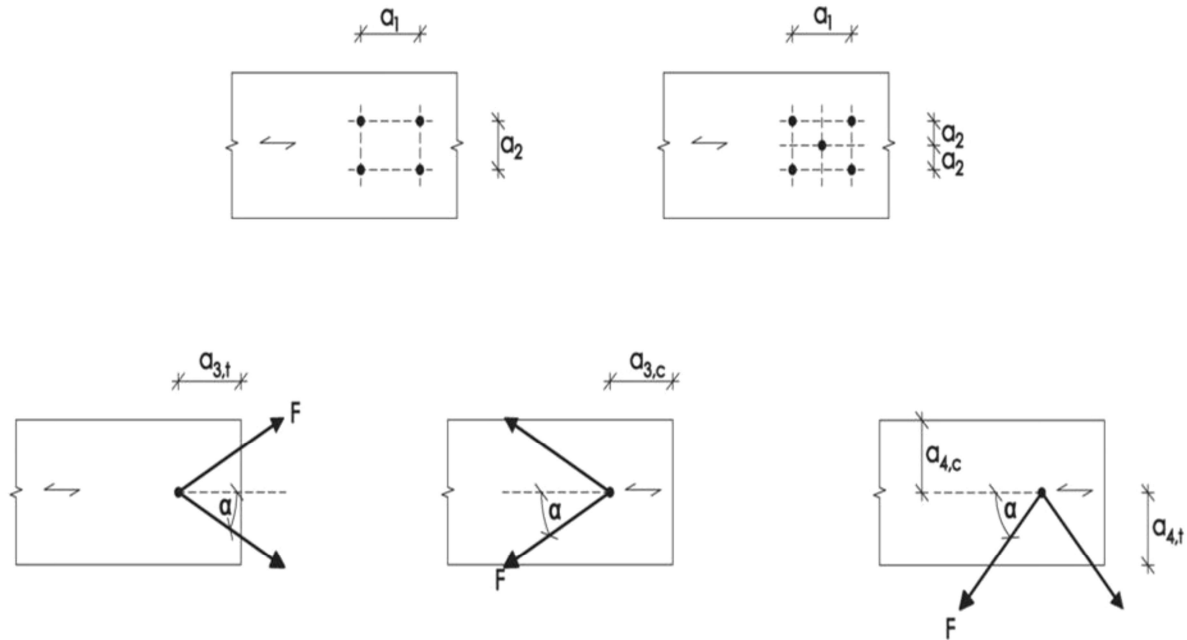

Definition von Achs- und Randabständen sowie der Abstände untereinander in der Schmalfläche, sofern in der technischen Spezifikation (ETA oder hEN) für Brettsperrholz nicht anderslautend angegeben:

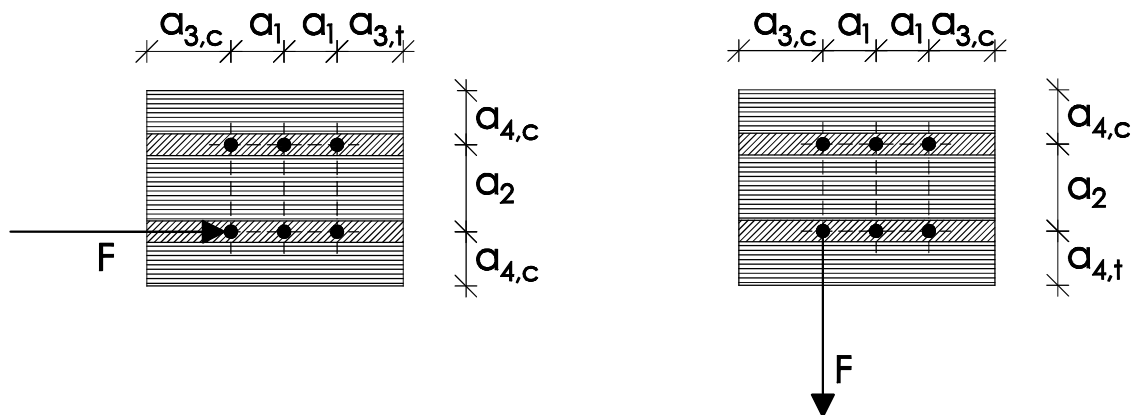

Bei Verschraubungen in den Schmalflächen sind a_1 und a_3 parallel zur Seitenfläche des Brettsperrholzes, a_2 und a_4 rechtwinklig zur Seitenfläche des Brettsperrholzes angeordnet.


Tabelle C1: Minimaler Achs- und Randabstand der Schrauben in den Seiten- und Schmalflächen von Brettsperrholz

	a_1	$a_{3,t}$	$a_{3,c}$	a_2	$a_{4,t}$	$a_{4,c}$
Seitenflächen (siehe Abb. 1)	$4 \cdot d$	$6 \cdot d$	$6 \cdot d$	$2,5 \cdot d$	$6 \cdot d$	$2,5 \cdot d$
Schmalflächen (siehe Abb. 2)	$10 \cdot d$	$12 \cdot d$	$7 \cdot d$	$4 \cdot d$	$6 \cdot d$	$3 \cdot d$

fischer Power-Fast und Holzbauschrauben	
Mindestrand- und Achsabstände	

Schematische Darstellung der Kopfeinspannung der Power-Fast-Schrauben

Metrische Schrauben mit Sechskantkopf, Senkkopf oder Zylinderkopf sowie Gewindestangen mit Mutter und U-Scheibe – jeweils nach statischer Anforderung – mindestens 2xM8 (≥ 4.6 bzw. A2-50) zur Verbindung der beiden Platten aus Aluminium (Festigkeitseigenschaften mindestens wie z.B. EN AW 6082, EN AW 5083, EN AW 6060 oder EN AC-44100); aus Stahl oder aus nicht rostendem Stahl (jeweils mindestens S235).

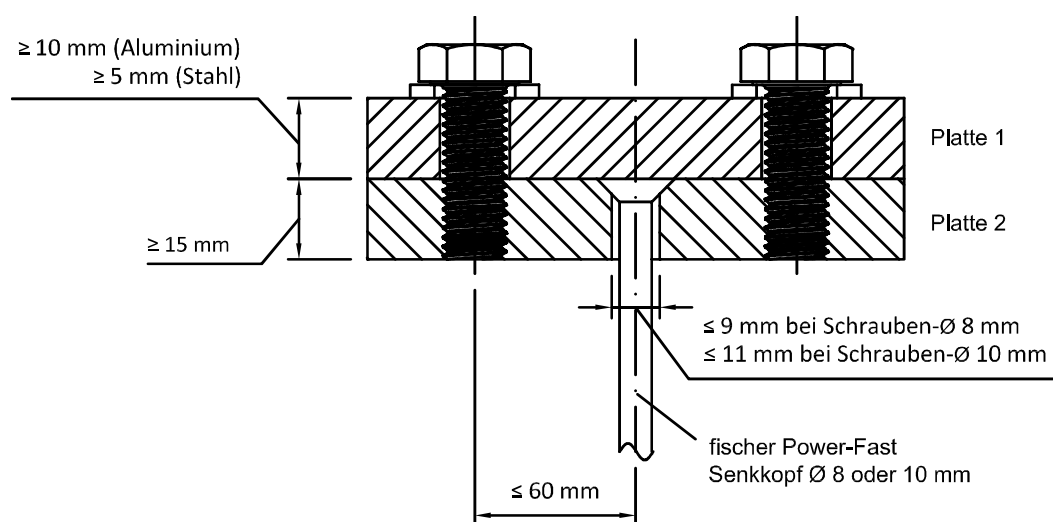

Angaben für die Nachweise der metrischen Schraubverbindung, sowie der beiden Platten sind nicht Bestandteil dieser Europäischen Technischen Bewertung.

(Abb. nicht maßstäblich)

fischer Power-Fast und Holzbauschrauben	
Kopfeinspannung bei Druckbeanspruchung	



DECLARATION OF PERFORMANCE



DoP: 0154

for fischer Power-Fast screws and fischer construction screws (Screws for use in timber constructions) – EN

1. Unique identification code of the product-type: **DoP: 0154**
2. Intended use/es: **For connections in load bearing timber constructions or for fixing of thermal insulation on rafters**
3. Manufacturer: **fischerwerke GmbH & Co. KG, Klaus-Fischer-Straße 1, 72178 Waldachtal, Germany**
4. Authorised representative: --
5. System/s of AVCP: **3**
6. European Assessment Document: **EAD 130118-00-0603**
European Technical Assessment: **ETA-11/0027; 2019-01-02**
Technical Assessment Body: **ETA-Danmark A/S**
Notified body/ies: **1343 – MPA Darmstadt**
7. Declared performance/s:

Mechanical resistance and stability (BWR 1), Safety in use (BWR 4)

Tensile strength

Screws made of carbon steel

Characteristic value $f_{tens,k}$:

Screw d = 3,0 mm: 2,7 kN
Screw d = 3,5 mm: 3,7 kN
Screw d = 4,0 mm: 4,8 kN
Screw d = 4,5 mm: 6,0 kN
Screw d = 5,0 mm: 7,5 kN
Screw d = 6,0 mm: 10,7 kN
Screw d = 8,0 mm: 19,1 kN
Screw d = 10,0 mm: 29,8 kN
Screw d = 12,0 mm: 32,7 kN

Screws made of stainless steel

Screw d = 3,0 mm: 1,6 kN
Screw d = 3,5 mm: 2,1 kN
Screw d = 4,0 mm: 2,8 kN
Screw d = 4,5 mm: 3,5 kN
Screw d = 5,0 mm: 4,3 kN
Screw d = 6,0 mm: 6,2 kN
Screw d = 8,0 mm: 13,0 kN

Insertion moment

Ratio of the characteristic torsional strength to the mean insertion moment:
 $f_{tor,k} / R_{tor,mean} \geq 1,5$

Torsional strength

Screws made of carbon steel

Characteristic value $f_{tor,k}$:

Screw d = 3,0 mm: 1,3 Nm
Screw d = 3,5 mm: 2,0 Nm
Screw d = 4,0 mm: 3,0 Nm
Screw d = 4,5 mm: 4,3 Nm
Screw d = 5,0 mm: 6,0 Nm
Screw d = 6,0 mm: 9,5 Nm
Screw d = 8,0 mm: 25,0 Nm
Screw d = 10,0 mm: 40,0 Nm
Screw d = 12,0 mm: 55,0 Nm

Screws made of stainless steel

Screw d = 3,0 mm: 0,9 Nm
Screw d = 3,5 mm: 1,3 Nm
Screw d = 4,0 mm: 1,9 Nm
Screw d = 4,5 mm: 2,6 Nm
Screw d = 5,0 mm: 3,7 Nm
Screw d = 6,0 mm: 6,5 Nm
Screw d = 8,0 mm: 16,0 Nm

Safety in case of fire (BWR 2)

- **Reaction to fire: Anchorages satisfy requirements for Class A 1**

Sustainable use of natural resources (BWR 7)

NPD



8. Appropriate Technical Documentation and/or Specific Technical Documentation: ---

The performance of the product identified above is in conformity with the set of declared performance/s. This declaration of performance is issued, in accordance with Regulation (EU) No 305/2011, under the sole responsibility of the manufacturer identified above.

Signed for and on behalf of the manufacturer by:

Andreas Bucher, Dipl.-Ing.

Wolfgang Hengesbach, Dipl.-Ing., Dipl.-Wirtsch.-Ing.



Tumlingen, 2019-01-09

- This DoP has been prepared in different languages. In case there is a dispute on the interpretation the english version shall always prevail.
- The Appendix includes voluntary and complementary information in English language exceeding the (language-neutrally specified) legal requirements.



ETA-Danmark A/S
Göteborg Plads 1
DK-2150 Nordhavn
Tel. +45 72 24 59 00
Fax +45 72 24 59 04
Internet www.etadanmark.dk

Appendix 1/41
Authorised and notified according
to Article 29 of the Regulation (EU)
No 305/2011 of the European
Parliament and of the Council of 9
March 2011

MEMBER OF EOTA



European Technical Assessment ETA-11/0027 of 2019/01/02

I General Part

Technical Assessment Body issuing the ETA and designated according to Article 29 of the Regulation (EU) No 305/2011: ETA-Danmark A/S

Trade name of the construction product:

fischer Power-Fast screws and fischer construction screws

Product family to which the above construction product belongs:

Screws for use in timber constructions

Manufacturer:

fischerwerke GmbH & Co. KG
Klaus-Fischer-Str. 1
72178 Waldachtal
GERMANY

Manufacturing plant:

fischerwerke

This European Technical Assessment contains:

41 pages including 4 annexes which form an integral part of the document

This European Technical Assessment is issued in accordance with Regulation (EU) No 305/2011, on the basis of:

European Assessment document (EAD) no. EAD 130118-00-0603 "Screws for timber constructions"

This version replaces:

The previous ETA with the same number issued on 2013-06-26 and expiry on 2018-06-26

Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and should be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full (excepted the confidential Annex(es) referred to above). However, partial reproduction may be made, with the written consent of the issuing Technical Assessment Body. Any partial reproduction has to be identified as such.

II SPECIFIC PART OF THE EUROPEAN TECHNICAL ASSESSMENT

1 Technical description of product and intended use

Technical description of the product

“fischer Power-Fast” and “fischer construction screws” are self-tapping screws to be used in timber structures. “fischer Power-Fast” screws shall be threaded over a part or over the full length. “fischer construction screws” shall be threaded over a part of the length. The screws shall be produced from carbon steel wire for nominal diameters of 3,0 mm to 12,0 mm and from stainless steel wire for nominal diameters of 3,0 mm to 8,0 mm. The material specification of the stainless steel screws is deposited with ETA-Danmark. Where corrosion protection is required, the material or coating shall be declared in accordance with the relevant specification given in Annex A of EN 14592.

Geometry and Material

The nominal diameter (outer thread diameter), d , shall not be less than 3,0 mm and shall not be greater than 12,0 mm. The overall length, L , of screws shall not be less than 20 mm and shall not be greater than 600 mm. Other dimensions are given in Annex A1 to Annex A19.

The ratio of inner thread diameter to outer thread diameter d_i/d ranges from 0,59 to 0,69.

The screws are threaded over a minimum length ℓ_g of $4,0 \cdot d$ (i.e. $\ell_g \geq 4,0 \cdot d$).

The lead p (distance between two adjacent thread flanks) ranges from $0,50 \cdot d$ to $0,67 \cdot d$.

No breaking of screws shall be observed at a bend angle, α , of less than $(45/d^{0,7} + 20)$ degrees.

The material specification of the of the stainless steel screws is deposited with ETA-Danmark.

2 Specification of the intended use in accordance with the applicable EAD

The screws are used for connections in load bearing timber structures between members of solid timber (softwood and hardwood). Furthermore, all kinds of processed timber products (all softwood and hardwood as well), such as glued laminated timber, cross-laminated timber, laminated veneer lumber, similar glued members, wood-based panels or steel.

Furthermore “fischer Power-Fast” screws with diameter of 6 mm, 8 mm, 10 mm and 12 mm may also be used for the fixing of heat insulation on rafters and on vertical facades.

Steel plates and wood-based panels except solid wood panels, Egger OSB Eurostrand 4 TOP and cross laminated timber shall only be located on the side of the screw head. The following wood-based panels may be used:

- Plywood according to EN 636 or ETA
- Particleboard according to EN 312 or ETA
- Oriented Strand Board, Type OSB/3 and OSB/4 according to EN 300 or ETA
- Fibreboard according to EN 622-2 and 622-3 or ETA (minimum density 650 kg/m³)
- Cement bonded particleboard according to ETA
- Solid wood panels according to EN 13353 and EN 13986, and cross laminated timber according to ETA
- Laminated Veneer Lumber according to EN 14374 or ETA
- Engineered wood products according to ETA if the ETA of the product includes provisions for the use of self-tapping screws, the provisions of the ETA of the engineered wood product apply

The screws shall be screwed into softwood without pre-drilling or after pre-drilling with a diameter not larger than the inner thread diameter for the length of the threaded part and with a maximum of the smooth shank diameter for the length of the smooth shank. The screws shall be driven into hardwood after pre-drilling with a suitable diameter according to section 3.11.

The screws are intended to be used in timber connections for which requirements for mechanical resistance and stability and safety in use in the sense of the Basic Works Requirements 1 and 4 of Regulation 305/2011 shall be fulfilled.

Form and dimensions of washers are given in Annex A20. Washers must be made of steel.

The design of the connections shall be based on the characteristic load-carrying capacities of the screws. The design capacities shall be derived from the characteristic capacities in accordance with Eurocode 5 or an appropriate national code (e.g. DIN 1052:2008-12). Regarding environmental conditions, national provisions at the building site shall apply.

The screws are intended for use for connections subject to static or quasi static loading.

The zinc-coated screws are for use in timber structures subject to the dry, internal conditions defined by the

service classes 1 and 2 of EN 1995-1-1:2008 (Eurocode 5).

The screws made of stainless steel meet the requirements of Eurocode 5 (EN 1995-1-1:2008), for use in structures subject to the wet conditions defined as service class 3.

The scope of the screws regarding resistance to corrosion shall be defined according to national provisions that apply at the installation site considering environmental conditions.

The provisions made in this European Technical Assessment are based on an assumed intended working life of the screws of 50 years.

The indications given on the working life cannot be interpreted as a guarantee given by the producer or Assessment Body, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

Characteristic	Assessment of characteristic
3.1 Mechanical resistance and stability*) (BWR1)	
Tensile strength	Characteristic value $f_{tens,k}$:
Screws made from carbon steel	Screw d = 3,0 mm: 2,7 kN Screw d = 3,5 mm: 3,7 kN Screw d = 4,0 mm: 4,8 kN Screw d = 4,5 mm: 6,0 kN Screw d = 5,0 mm: 7,5 kN Screw d = 6,0 mm: 10,7 kN Screw d = 8,0 mm: 19,1 kN Screw d = 10,0 mm: 29,8 kN Screw d = 12,0 mm: 32,7 kN
Screws from stainless steel	Screw d = 3,0 mm: 1,6 kN Screw d = 3,5 mm: 2,1 kN Screw d = 4,0 mm: 2,8 kN Screw d = 4,5 mm: 3,5 kN Screw d = 5,0 mm: 4,3 kN Screw d = 6,0 mm: 6,2 kN Screw d = 8,0 mm: 13,0 kN
Insertion moment	Ratio of the characteristic torsional strength to the mean insertion moment: $f_{tor,k} / R_{tor,mean} \geq 1,5$
Torsional strength	Characteristic value $f_{tor,k}$:
Screws from carbon steel	Screw d = 3,0 mm: 1,3 Nm Screw d = 3,5 mm: 2,0 Nm Screw d = 4,0 mm: 3,0 Nm Screw d = 4,5 mm: 4,3 Nm Screw d = 5,0 mm: 6,0 Nm Screw d = 6,0 mm: 9,5 Nm Screw d = 8,0 mm: 25,0 Nm Screw d = 10,0 mm: 40,0 Nm Screw d = 12,0 mm: 55,0 Nm
Screws from stainless steel	Screw d = 3,0 mm: 0,9 Nm Screw d = 3,5 mm: 1,3 Nm Screw d = 4,0 mm: 1,9 Nm Screw d = 4,5 mm: 2,6 Nm Screw d = 5,0 mm: 3,7 Nm Screw d = 6,0 mm: 6,5 Nm Screw d = 8,0 mm: 16,0 Nm
3.2 Safety in case of fire (BWR2)	
Reaction to fire	The screws are made from steel classified as Euroclass A1 in accordance with EN 13501-1 and Commission Delegated Regulation 2016/364.

Characteristic		Assessment of characteristic
3.7	Sustainable use of natural resources (BR7)	No Performance Assessed
3.8	General aspects related to the performance of the product	The screws have been assessed as having satisfactory durability and serviceability when used in timber structures using the timber species described in Eurocode 5 and subject to the conditions defined by service classes 1, 2 and 3
Identification		See Annex A

*) See additional information in section 3.9 – 3.12.

**) In addition to the specific clauses relating to dangerous substances contained in this European technical Assessment, there may be other requirements applicable to the products falling within its scope (e.g. transposed European legislation and national laws, regulations and administrative provisions). In order to meet the provisions of the Construction Products Regulation, these requirements need also to be complied with, when and where they apply.

3.9 Mechanical resistance and stability

The load-carrying capacities for “fischer Power-Fast” and “fischer construction screws” are applicable to the wood-based materials mentioned in paragraph 1 even though the term timber has been used in the following.

The characteristic lateral load-carrying capacities and the characteristic axial withdrawal capacities of “fischer Power-Fast” and “fischer construction screws” screws should be used for designs in accordance with Eurocode 5 or an appropriate national code.

Pointside penetration length of the threaded part must be $\ell_{ef} \geq 4 \cdot d$, where d is the outer thread diameter of the screw. For the fixing of rafters, point side penetration must be at least 40 mm, $\ell_{ef} \geq 40$ mm.

ETA's for structural members may be considered if applicable.

For wood-based panels the relevant ETAs must be considered where applicable.

Lateral load-carrying capacity

The characteristic lateral load-carrying capacity of “fischer Power-Fast” and “fischer construction screws” screws shall be calculated according to EN 1995-1-1:2008 (Eurocode 5) using the outer thread diameter d as the nominal diameter of the screw. The contribution from the rope effect may be considered.

The characteristic yield moment shall be calculated from:

Screws from carbon steel for $3,0 \text{ mm} \leq d \leq 5,0 \text{ mm}$ and $12,0 \text{ mm}$:

$$M_{y,k} = 0,15 \cdot 500 \text{ (N/mm}^2\text{)} \cdot d^{2,6} \quad [\text{Nmm}]$$

Screws from carbon steel for $6,0 \text{ mm} \leq d \leq 10,0 \text{ mm}$:

$$M_{y,k} = 0,15 \cdot 600 \text{ (N/mm}^2\text{)} \cdot d^{2,6} \quad [\text{Nmm}]$$

Screws from stainless steel for $3,0 \text{ mm} < d < 6,0 \text{ mm}$:

$$M_{y,k} = 0,15 \cdot 350 \text{ (N/mm}^2\text{)} \cdot d^{2,6} \quad [\text{Nmm}]$$

Screws from stainless steel for $d = 8,0 \text{ mm}$:

$$M_{y,k} = 0,15 \cdot 400 \text{ (N/mm}^2\text{)} \cdot d^{2,6} \quad [\text{Nmm}]$$

where

d outer thread diameter [mm]

The embedding strength for screws in non-pre-drilled holes arranged at an angle between screw axis and grain direction, $0^\circ \leq \alpha \leq 90^\circ$ is:

$$f_{h,k} = \frac{0,082 \cdot \rho_k \cdot d^{-0,3}}{2,5 \cdot \cos^2 \alpha + \sin^2 \alpha} \quad [\text{N/mm}^2]$$

and accordingly, for screws in pre-drilled holes:

$$f_{h,k} = \frac{0,082 \cdot \rho_k \cdot (1 - 0,01 \cdot d)}{2,5 \cdot \cos^2 \alpha + \sin^2 \alpha} \quad [\text{N/mm}^2]$$

Where

ρ_k characteristic timber density [kg/m^3];

d outer thread diameter [mm];

α angle between screw axis and grain direction.

The embedding strength for screws arranged parallel to the plane surface of cross laminated timber, independent of the angle between screw axis and grain direction, $0^\circ \leq \alpha \leq 90^\circ$, may be calculated from:

$$f_{h,k} = 20 \cdot d^{-0,5} \quad [\text{N/mm}^2]$$

Where

d outer thread diameter [mm]

The embedding strength for screws in the plane surface of cross laminated timber should be assumed as for solid timber based on the characteristic density of the outer layer. If relevant, the angle between force and grain direction of the outer layer should be taken into account.

The direction of the lateral force shall be perpendicular to the screw axis and parallel to the plane surface of the cross laminated timber.

Axial withdrawal capacity

The characteristic axial withdrawal capacity of „fischer Power-Fast” and “fischer construction screws” in solid timber (softwood and ash, beech or oak hardwood), glued laminated timber (softwood and hardwood, ash, beech or oak), laminated veneer lumber (softwood or hardwood beech) or cross-laminated timber members at an angle of $0^\circ \leq \alpha \leq 90^\circ$ to the grain or in Egger Eurostrand OSB 4 TOP at an angle of $\alpha = 90^\circ$ to the panel surface shall be calculated from:

$$F_{ax,\alpha,Rk} = n_{ef} \cdot k_{ax} \cdot f_{ax,k} \cdot d \cdot \ell_{ef} \cdot \left(\frac{\rho_k}{350} \right)^{0,8} \quad [\text{N}]$$

Where

$F_{ax,\alpha,RK}$ Characteristic withdrawal capacity of the connection at an angle α to the grain [N]

n_{ef} Effective number of screws according to EN 1995-1-1

For inclined screws: $n_{ef} = \max \{ n^{0,9}; 0,9 \cdot n \}$

k_{ax} Factor, taking into account the angle α between screw axis and grain direction
 $k_{ax} = 1,0$ for $45^\circ \leq \alpha < 90^\circ$

$k_{ax} = 0,3 + \frac{0,7 \cdot \alpha}{45}$ for $0^\circ \leq \alpha < 45^\circ$

jointed beams or columns or for the fixing of thermal insulation material, $n_{ef} = n$.

$f_{ax,k}$ Characteristic withdrawal parameter [N/mm²] for timber members

screw $d = 3,0$ mm:	$f_{ax,k} = 13,8$ N/mm ²
screw $d = 3,5$ mm:	$f_{ax,k} = 13,4$ N/mm ²
screw $d = 4,0$ mm:	$f_{ax,k} = 13,0$ N/mm ²
screw $d = 4,5$ mm:	$f_{ax,k} = 12,6$ N/mm ²
screw $d = 5,0$ mm:	$f_{ax,k} = 12,2$ N/mm ²
screw $d = 6,0$ mm:	$f_{ax,k} = 11,6$ N/mm ²
screw $d \geq 8,0$ mm:	$f_{ax,k} = 10,0$ N/mm ²

for Egger Eurostrand OSB 4 TOP with minimum thickness $t = 12$ mm:

screw $5,0$ mm $\leq d \leq 10,0$ mm:

$$f_{ax,k} = 10,0 \text{ N/mm}^2$$

d Outer thread diameter [mm]

ℓ_{ef} Point side penetration length of the threaded part according to EN 1995-1-1:2008 [mm]

α Angle between grain and screw axis [°]

ρ_k Characteristic density [kg/m³], for hardwoods the assumed characteristic density shall not exceed 730 kg/m³

For screws arranged under an angle between screw axis and grain direction of less than 90°, the minimum threaded penetration length is:

$$\ell_{ef} \geq \min(4 \cdot d / \sin \alpha ; 20 \cdot d)$$

For screws penetrating more than one layer of cross laminated timber, the different layers may be taken into account proportionally.

The axial withdrawal capacity is limited by the head pull-through capacity and the tensile strength of the screw.

For axially loaded screws in tension, where the external force is parallel to the screw axes, the rules in EN 1995-1-1, 8.7.2 (8) should be applied.

For inclined screws in timber-to-timber or steel-to-timber shear connections, where the screws are arranged under an angle $30^\circ \leq \alpha \leq 60^\circ$ between the shear plane and the screw axis, the effective number of screws n_{ef} should be determined as follows:

For one row of n screws parallel to the load, the load-carrying capacity should be calculated using the effective number of fasteners n_{ef} , where

$$n_{ef} = \max\{n^{0,9} ; 0,9 \cdot n\}$$

and n is the number of inclined screws in a row. If crossed pairs of screws are used in timber-to-timber connections, n is the number of crossed pairs of screws in a row.

Note: For inclined screws as fasteners in mechanically

Head pull-through capacity

The characteristic head pull-through capacity of “fischer Power-Fast” and “fischer construction screws” shall be calculated according to EN 1995-1-1:2008 from:

$$F_{ax,\alpha,Rk} = n_{ef} \cdot f_{head,k} \cdot d_h^2 \cdot \left(\frac{\rho_k}{350}\right)^{0,8} \quad [N]$$

where:

$F_{ax,\alpha,Rk}$ characteristic head pull-through capacity of the connection at an angle $\alpha \geq 30^\circ$ to the grain [N]

n_{ef} effective number of screws according to EN 1995-1-1

For inclined screws: $n_{ef} = \max\{n^{0,9} ; 0,9 \cdot n\}$ (see axial withdrawal capacity)

$f_{head,k}$ characteristic head pull-through parameter [N/mm²]

d_h diameter of the screw head [mm]

ρ_k characteristic density [kg/m³], for wood-based panels $\rho_k = 380$ kg/m³

Characteristic head pull-through parameter for screws with head diameter ≤ 21 mm in connections with timber and with wood-based panels with thicknesses above 20 mm:

$$f_{head,k} = 12 \text{ N/mm}^2$$

Characteristic head pull-through parameter for screws with head diameter $21 \text{ mm} < d_h \leq 35$ mm in connections with timber and with wood-based panels with thicknesses above 20 mm:

$$f_{head,k} = 10 \text{ N/mm}^2$$

Characteristic head pull-through parameter for screws in connections with wood-based panels with thicknesses between 12 mm and 20 mm:

$$f_{head,k} = 8 \text{ N/mm}^2$$

Screws in connections with wood-based panels with a thickness below 12 mm (minimum thickness of the wood based panels of $1,2 \cdot d$ with d as outer thread diameter):

$$f_{head,k} = 8 \text{ N/mm}^2$$

limited to $F_{ax,\alpha,Rk} = 400$ N

The head diameter d_h shall be greater than $1,8 \cdot d_s$, where d_s is the smooth shank or the wire diameter. Otherwise the characteristic head pull-through capacity $F_{ax,\alpha,Rk} = 0$.

Outer diameter of washers $d_h > 35$ mm shall not be considered.

The minimum thickness of wood-based panels according to the clause 3.9 must be observed.

In steel-to-timber connections the head pull-through capacity is not decisive.

Tensile capacity

The characteristic tensile strength $f_{\text{tens},k}$ of “fischer Power-Fast” and “fischer construction screws” is:

Screws from carbon steel:

Screw d = 3,0 mm:	2,7 kN
Screw d = 3,5 mm:	3,7 kN
Screw d = 4,0 mm:	4,3 kN
Screw d = 4,5 mm:	5,5 kN
Screw d = 5,0 mm:	6,8 kN
Screw d = 6,0 mm:	10,7 kN
Screw d = 8,0 mm:	19,1 kN
Screw d = 10,0 mm:	29,8 kN
Screw d = 12,0 mm:	32,7 kN

Screws from stainless steel:

Screw d = 3,0 mm:	1,6 kN
Screw d = 3,5 mm:	2,1 kN
Screw d = 4,0 mm:	2,8 kN
Screw d = 4,5 mm:	3,5 kN
Screw d = 5,0 mm:	4,3 kN
Screw d = 6,0 mm:	6,2 kN
Screw d = 8,0 mm:	13,0 kN

For screws used in combination with steel plates, the tear-off capacity of the screw head should be greater than the tensile strength of the screw.

Compressive capacity

The characteristic compressive capacity $F_{\text{ax},Rk}$ of fischer Power-Fast screws with the head fixed between two aluminium-, carbon steel- or stainless steel plates according to Annex D and the thread driven completely into timber perpendicular to the grain shall be calculated from:

$$F_{\text{ax},Rk} = \min \left\{ f_{\text{ax},k} \cdot d \cdot \ell_{\text{ef}} \cdot \left(\frac{\rho_k}{350} \right)^{0,8} ; \kappa_c \cdot N_{\text{pl},k} \right\} [\text{N}]$$

Where

$$\kappa_c = \begin{cases} 1 & \text{for } \bar{\lambda}_k \leq 0,2 \\ \frac{1}{k + \sqrt{k^2 - \bar{\lambda}_k^2}} & \text{for } \bar{\lambda}_k > 0,2 \end{cases}$$

$$k = 0,5 \cdot \left[1 + 0,49 \cdot (\bar{\lambda}_k - 0,2) + \bar{\lambda}_k^2 \right]$$

The relative slenderness ratio shall be calculated from:

$$\bar{\lambda}_k = \sqrt{\frac{N_{\text{pl},k}}{N_{\text{ki},k}}}$$

Where

$$N_{\text{pl},k} = \pi \cdot \frac{d_s^2}{4} \cdot f_{y,k} [\text{N}]$$

is the characteristic value for the axial capacity in case of plastic analysis referred to the smooth shank cross-section.

$$N_{\text{ki},k} = \frac{\pi^2 \cdot EI_s}{\ell_{\text{ef}}^2} [\text{N}]$$

is the characteristic ideal elastic buckling load.

Characteristic yield strength for screws made of carbon steel:

$$f_{y,k} = 1000 [\text{N/mm}^2]$$

Characteristic yield strength for screws made of stainless steel:

$$f_{y,k} = 500 [\text{N/mm}^2]$$

Modulus of elasticity for screws made of carbon steel:

$$E_s = 210000 [\text{N/mm}^2]$$

Modulus of elasticity for screws made of stainless steel:

$$E_s = 160000 [\text{N/mm}^2]$$

Second moment of area:

$$I_s = \frac{\pi}{64} \cdot d_s^4 [\text{mm}^4]$$

d_s = smooth shank diameter [mm]

$\ell_{\text{ef}} = 0,7 \cdot \ell$ buckling length [mm]

ℓ = free screw length protruding from the timber member including the screw head [mm]

Note: When determining design values of the compressive capacity it should be considered that $f_{\text{ax},d}$ is to be calculated using k_{mod} and γ_M for timber according to EN 1995 while $N_{\text{pl},d}$ is calculated using $\gamma_{M,1}$ for steel buckling according to EN 1993.

Combined laterally and axially loaded screws

For screwed connections subjected to a combination of axial load and lateral load, the following expression should be satisfied:

$$\left(\frac{F_{\text{ax},Ed}}{F_{\text{ax},Rd}} \right)^2 + \left(\frac{F_{\text{la},Ed}}{F_{\text{la},Rd}} \right)^2 \leq 1$$

where

$F_{\text{ax},Ed}$ axial design load of the screw

$F_{\text{la},Ed}$ lateral design load of the screw

$F_{\text{ax},Rd}$ design load-carrying capacity of an axially loaded screw

$F_{\text{la},Rd}$ design load-carrying capacity of a laterally loaded screw

Slip modulus

The axial slip modulus K_{ser} of a screw for the serviceability limit state should be taken independent of angle α to the grain as:

$$C = K_{\text{ser}} = 780 \cdot d^{0,2} \cdot \ell_{\text{ef}}^{0,4} [\text{N/mm}]$$

Where

d outer thread diameter [mm]

ℓ_{ef} penetration length in the structural member [mm]

Thermal insulation material on top of rafters

“fischer Power-Fast” screws with an outer thread diameter of $d = 6 \text{ mm}$, 8 mm , 10 mm and 12 mm may be used for the fixing of thermal insulation material on top of rafters.

The thickness of the insulation ranges up to 400 mm . The rafter insulation must be placed on top of solid timber or glued laminated timber rafters or cross-laminated timber members and be fixed by battens placed parallel to the rafters or by wood-based panels on top of the insulation layer. The insulation of vertical facades is also covered by the rules given here.

Screws must be screwed in the rafter through the battens or panels and the insulation without pre-drilling in one sequence.

The angle α between the screw axis and the grain direction of the rafter should be between 30° and 90° .

The battens must be from solid timber (softwood) according to EN 338:2003-04. The minimum thickness of the battens is 80 mm and the minimum width 100 mm for screws with outer thread diameter $d = 12 \text{ mm}$. The minimum thickness of the battens is 40 mm and the minimum width 60 mm for screws with outer thread diameter $d = 10 \text{ mm}$. For screws with outer thread diameter $d = 6 \text{ mm}$ and 8 mm the minimum thickness of the battens is 30 mm and the minimum width 50 mm .

Alternatively, to the battens, boards with a minimum thickness of 20 mm from plywood according to EN 636, particle board according to EN 312, oriented strand board OSB/3 and OSB/4 according to EN 300 or ETA and solid wood panels according to EN 13353 may be used.

The rafter consists of solid timber (softwood) according to EN 338, glued laminated timber according to EN 14081, cross-laminated timber, laminated veneer lumber according to EN 14374 or to ETA or similar glued members according to ETA and has a minimum width of 60 mm .

The insulation must comply with a ETA.

The insulation must have a minimum compressive stress of $\sigma_{10\%} = 0,05 \text{ N/mm}^2$ at 10% deformation according to EN 826:1996-05.

The analysis of the fixing of the insulation and battens or boards, respectively, may be carried out using the static model in Annex B. The battens or boards, respectively, must have sufficient strength and stiffness. The maximum pressure between the battens or boards, respectively, and the insulation shall not exceed $1,1 \cdot \sigma_{10\%}$.

The characteristic axial withdrawal capacity of the screws for rafter or facade insulation shall be calculated from:

$$F_{ax,\alpha,Rk} = \min \begin{cases} k_{ax} \cdot f_{ax,k} \cdot d \cdot \ell_{ef} \cdot k_1 \cdot k_2 \cdot \left(\frac{\rho_k}{350} \right)^{0,8} \\ f_{head,k} \cdot d_h^2 \cdot \left(\frac{\rho_k}{350} \right)^{0,8} \\ f_{tens,d} \end{cases} \quad [\text{N}]$$

where

$F_{ax,\alpha,Rk}$	Characteristic withdrawal capacity of the connection at an angle α to the grain [N]
k_{ax}	Factor, taking into account the angle α between screw axis and grain direction $k_{ax} = 1,0$ for $45^\circ \leq \alpha < 90^\circ$ $k_{ax} = 0,3 + \frac{0,7 \cdot \alpha}{45}$ for $0^\circ \leq \alpha < 45^\circ$
$f_{ax,k}$	Characteristic withdrawal parameter [N/mm ²]
D	Outer thread diameter [mm]
ℓ_{ef}	Point side penetration length of the threaded part according to EN 1995-1-1:2008 [mm]
α	Angle between grain and screw axis ($\alpha \geq 30^\circ$)
k_1	$\min \{1; 220/t_{HI}\}$
k_2	$\min \{1; \sigma_{10\%}/0,12\}$
t_{HI}	Thickness of the thermal insulation [mm]
$\sigma_{10\%}$	Compressive stress of the thermal insulation under 10% deformation [N/mm ²] $\sigma_{10\%} \geq 0,05 \text{ N/mm}^2$
$f_{head,k}$	Characteristic head pull-through parameter [N/mm ²]
d_h	Outer diameter of the screw head [mm]
ρ_k	Characteristic density [kg/m ³]
$f_{tens,d}$	Characteristic tensile capacity of the screw [N]

Friction forces shall not be considered for the design of the characteristic axial withdrawal capacity of the screws.

The anchorage of wind suction forces as well as the bending stresses of the battens or the boards, respectively, shall be considered in design. Additional screws perpendicular to the grain of the rafter (angle $\alpha = 90^\circ$) may be arranged if necessary.

Screws for the anchorage of rafter insulation shall be arranged according to Annex B.

The maximum screw spacing is $e_s = 1,75 \text{ m}$.

3.10 Aspects related to the performance of the product

3.10.1 Corrosion protection in service class 1, 2 and 3.

The fischer Power-Fast and fischer construction screws are produced from carbon wire. Screws made from carbon steel

are electrogalvanised and yellow or blue chromate. The mean thickness of the zinc coating is 5µm.

The material specification of the stainless steel screws is deposited with ETA-Danmark.

3.11 General aspects related to the intended use of the product

The screws are manufactured in accordance with the provisions of the European Technical Assessment using the automated manufacturing process and laid down in the technical documentation.

The installation shall be carried out in accordance with Eurocode 5 or an appropriate national code unless otherwise is defined in the following. Instructions from fischerwerke GmbH & Co. KG should be considered for installation.

The screws are used for connections in load bearing timber structures between members of solid timber (softwood and hardwood), glued laminated timber (softwood and hardwood), cross-laminated timber (minimum diameter $d = 6,0$ mm, softwood and hardwood)), laminated veneer lumber (softwood and hardwood), similar glued members (softwood and hardwood), wood-based panels or steel members.

The screws may be used for connections in load bearing timber structures with structural members according to an associated ETA, if according to the ETA of the structural member a connection in load bearing timber structures with screws according to an ETA is allowed.

Furthermore, the screws with diameters between 6 mm and 12 mm may also be used for the fixing of insulation on top of rafters or at vertical facades.

A minimum of two screws should be used for connections in load bearing timber structures. A single screw may be used in structural connections if the penetration length of the screw including an unthreaded part of the shank is at least $20 \cdot d$ and the screw is only axially loaded. The load-bearing capacity of the single screw in this case shall be reduced by 50 %.

A single screw per connection may also be used, if the member is fixed with at least two screws and the screws are used for the fixing of boards, battens and wind braces, or for the fixing of rafters, purlins or similar on main beams or top plates.

The minimum penetration depth in structural members made of solid, glued or cross-laminated timber is $4 \cdot d$.

Wood-based panels - except Egger Eurostrand OSB 4 TOP - and steel plates should only be arranged on the side of the

screw head. The minimum thickness of wood-based panels should be $1,2 \cdot d$. Furthermore, the minimum thickness for following wood-based panels should be:

- Plywood, Fibreboards: 6 mm
- Particleboards, OSB, Cement Particleboards: 8 mm
- Solid wood panels: 12 mm

For structural members according to ETA's the terms of the ETA's must be considered.

If screws with an outer thread diameter $d \geq 8$ mm are used in load bearing timber structures, the structural solid or glued laminated timber, laminated veneer lumber and similar glued members must be from spruce, pine or fir. This does not apply for screws in pre-drilled holes.

The minimum angle between the screw axis and the grain direction is $\alpha = 0^\circ$.

The screws shall be driven into softwood without predrilling or after pre-drilling. The screws shall be driven into hardwood with a maximum characteristic density of 730 kg/m^3 after predrilling.

The drill hole diameters are:

Outer thread diameter	Drill hole diameter	
	Softwood	Hardwood
4,0	2,5	3,0
4,5	2,5	3,0
5,0	3,0	3,0
6,0	4,0	4,0
8,0	5,0	6,0
10,0	6,0	7,0
12,0	7,0	8,0

The hole diameter in steel members must be predrilled with a suitable diameter.

Only the equipment prescribed by fischerwerke GmbH & Co. KG shall be used for driving the screws.

In connections with screws with countersunk head according to Annexes A1, A5, A6, A7, A11, A13 and A18, the head must be flush with the surface of the connected structural member. A deeper countersink is not allowed.

Screws from carbon steel and stainless steel with countersunk head according to Annex A1, A2, A5, A6, A7, A11, A13, A14 and A18 may be used together with washers according to Annex A20. Washers according to EN ISO 7094 may be used together with washers according to Annex A20.

Screws according to Annex A3, A4, A8, A9, A10, A12 A16, A17 and A19 may be used together with washers according to EN ISO 7094.

Washers from carbon steel should be used with screws from carbon steel and screws from stainless steel with washers from stainless steel. Washers should have a full bearing area.

For structural timber members, minimum spacing and distances for screws in predrilled holes are given in EN 1995-1-1:2008 (Eurocode 5) clause 8.3.1.2 and table 8.2 as for nails in predrilled holes. Here, the outer thread diameter d must be considered.

For screws in non-predrilled holes, minimum spacing and distances are given in EN 1995-1-1:2008 (Eurocode 5) clause 8.3.1.2 and table 8.2 as for nails in non-predrilled holes.

Alternatively, minimum distances and spacing for exclusively axially loaded “fischer Power-Fast” screws in non-predrilled holes in members of solid timber (softwood and hardwood), glued laminated timber or similar glued products (softwood and hardwood) with a minimum thickness $t = 12 \cdot d$ and a minimum width of $8 \cdot d$ or 60 mm, whichever is the greater, may be taken as:

Spacing a_1 parallel to the grain	$a_1 = 5 \cdot d$
Spacing a_2 perpendicular to the grain	$a_2 = 5 \cdot d$
Distance $a_{3,c}$ from centre of the screw-part in timber to the end grain	$a_{3,c} = 9 \cdot d$
Distance $a_{4,c}$ from centre of the screw-part in timber to the edge	$a_{4,c} = 4 \cdot d$

Spacing a_2 perpendicular to the grain may be reduced from $5 \cdot d$ to $2,5 \cdot d$, if the condition $a_1 \cdot a_2 \geq 25 \cdot d^2$ is fulfilled.

For Douglas fir members minimum spacing and distances parallel to the grain shall be increased by 50%.

Minimum distances from loaded or unloaded ends must be $15 \cdot d$ for screws in non-predrilled holes with outer thread diameter $d \geq 8$ mm and timber thickness $t < 5 \cdot d$.

Minimum distances from the unloaded edge perpendicular to the grain may be reduced to $3 \cdot d$ also for timber thickness $t < 5 \cdot d$, if the spacing parallel to the grain and the end distance is at least $25 \cdot d$.

Unless specified otherwise in the technical specification (ETA or hEN) of cross laminated timber, minimum distances and spacing for screws in the plane surface of cross laminated timber members with a minimum thickness $t = 10 \cdot d$ may be taken as (see Annex C):

Spacing a_1 parallel to the grain	$a_1 = 4 \cdot d$
Spacing a_2 perpendicular to the grain	$a_2 = 2,5 \cdot d$
Distance $a_{3,c}$ from centre of the screw-part in timber to the unloaded end grain of the plane surface	$a_{3,c} = 6 \cdot d$
Distance $a_{3,t}$ from centre of the screw-part in timber to the loaded end grain	

of the plane surface	$a_{3,t} = 6 \cdot d$
Distance $a_{4,c}$ from centre of the screw-part in timber to the unloaded edge	$a_{4,c} = 2,5 \cdot d$
Distance $a_{4,t}$ from centre of the screw-part in timber to the loaded edge	$a_{4,t} = 6 \cdot d$

Unless specified otherwise in the technical specification (ETA or hEN) of cross laminated timber, minimum distances and spacing for screws in the edge surface of cross laminated timber members with a minimum thickness $t = 10 \cdot d$ and a minimum penetration depth perpendicular to the edge surface of $10 \cdot d$ may be taken as (see Annex C):

Spacing a_1 parallel to the CLT plane surface	$a_1 = 10 \cdot d$
Spacing a_2 perpendicular to the CLT plane surface	$a_2 = 4 \cdot d$
Distance $a_{3,c}$ from centre of the screw-part in timber to the unloaded end	$a_{3,c} = 7 \cdot d$
Distance $a_{3,t}$ from centre of the screw-part in timber to the loaded end	$a_{3,t} = 12 \cdot d$
Distance $a_{4,c}$ from centre of the screw-part in timber to the unloaded edge	$a_{4,c} = 3 \cdot d$
Distance $a_{4,t}$ from centre of the screw-part in timber to the loaded edge	$a_{4,t} = 6 \cdot d$

For a crossed screw couple the minimum spacing between the crossing screws is $1,5 \cdot d$.

Minimum thickness for structural members is $t = 24$ mm for screws with outer thread diameter $d < 8$ mm, $t = 30$ mm for screws with outer thread diameter $d = 8$ mm, $t = 40$ mm for screws with outer thread diameter $d = 10$ mm and $t = 80$ mm for screws with outer thread diameter $d = 12$ mm.

4 Attestation and verification of constancy of performance (AVCP)

4.1 AVCP system

According to the decision 97/176/EC of the European Commission¹, as amended, the system(s) of assessment and verification of constancy of performance (see Annex V to Regulation (EU) No 305/2011) is 3.

5 Technical details necessary for the implementation of the AVCP system, as foreseen in the applicable EAD

Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited at ETA-Danmark prior to CE marking


Issued in Copenhagen on 2019-01-02 by



Thomas Bruun
Managing Director, ETA-Danmark

Appendix 14 / 41

Screw sizes and material

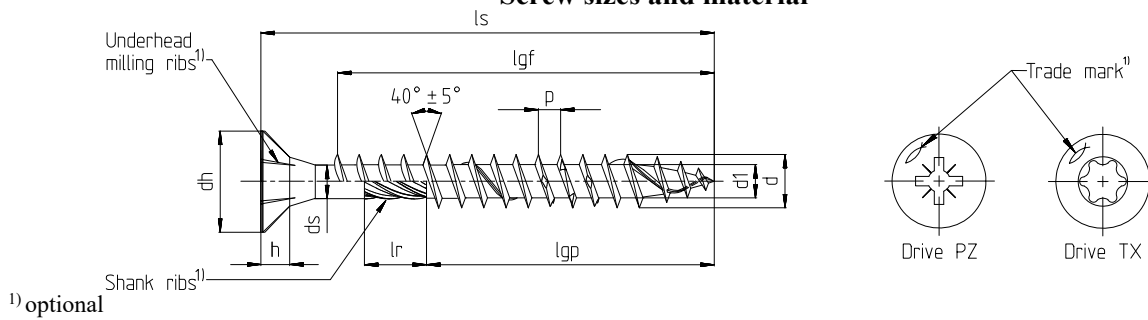

Power-Fast self-drilling screw - Countersunk head with full- or partial thread

- Carbon Steel
- Possible surface treatments: yellow or blue zinc-plated, blue zinc-plated $\geq 12\mu\text{m}$, bonus-zinc, burnished, nickel-, brass plated

Nominal diameter		3,0	3,5	4,0	4,5	5,0	6,0									
d	Outer diameter	3,00	3,50	4,00	4,50	5,00	6,00									
	Allow. deviation	$\pm 0,30$														
d ₁	Core diameter	2,00	2,20	2,50	2,70	3,00	4,00									
	Allow. deviation	$-0,25 / +0,10$				$\pm 0,20$										
d _h	Head diameter	6,00	7,00	8,00	9,00	10,00	12,00									
	Allow. deviation	$-0,50 / +0,10$														
d _s	Shank diameter	2,25	2,60	2,90	3,25	3,60	4,20									
	Allow. deviation	$-0,30 / +0,10$														
h	Head height	1,90	2,10	2,50	2,70	3,00	3,80									
	Thread pitch	1,50	1,80	2,00	2,20	2,50	3,00-4,50									
p	Allow. deviation	$\pm 10\%$														
l _r ¹⁾	Shank ribs length	3,75	4,25	4,75	5,50	6,00	7,00									
	Allow. deviation	$\pm 0,75$			$\pm 1,00$											
Drive TX		10		20		20	25	30								
Drive PZ		1	2				3									
Screw length l _s		Standard thread length l _{gf} = Full thread l _{gp} = Partial thread Tolerance: $\pm 2,0$ ²⁾														
Nominal length	min	max	l _{gf}	l _{gp}	l _{gf}	l _{gp}	l _{gf}	l _{gp}	l _{gf}	l _{gp}	l _{gf}	l _{gp}	l _{gf}	l _{gp}		
20	18,95	21,05	16		16		16		16							
25	23,75	26,25	21		21	18	20	18	20							
30	28,75	31,25	26	18	26	18	25	18	25	18	24					
35	33,50	36,50	31	24	31	24	30	24	30	24	29	24	28			
40	38,50	41,50	36	24	36	24	35	24	35	24	34	24	33	24		
45	43,50	46,50	41	30	41	30	40	30	40	30	39	30	38	30		
50	48,50	51,50			46	30	45	30	45	30	44	30	43	30		
55	53,50	56,50					50	36	50	36	49	36	48			
60	58,50	61,50						36		36		36	53	36		
70	68,50	71,50						42		42		42	63	42		
80	78,50	81,50						50		50		50	73	50		
90	88,25	91,75										60		60		
100	98,25	101,75										60		60		
110	108,25	111,75										70		70		
120	118,25	121,75										70		70		
in steps of 10mm																
130-300	l _s -2,00	l _s +2,00												70		


All sizes in mm

- Intermediate lengths at l_s are possible
- Screws with partial thread > 50 mm length with shank ribs
- Threaded lengths between $4 \times d \leq l_g \leq l_{g\text{max}}$ are possible

²⁾ $10\text{mm} \geq l_g \leq 18\text{mm} \triangleq \pm 1,5\text{mm}$
 $18\text{mm} \geq l_g \leq 30\text{mm} \triangleq \pm 1,7\text{mm}$

fischer Power-Fast and Construction Screws	Annex A1
Sizes and Material	of European Technical Assessment ETA-11/0027

Appendix 15 / 41

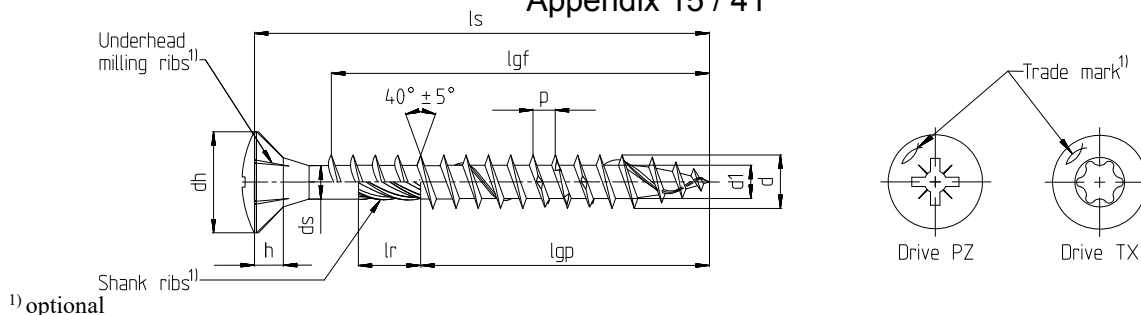**Power-Fast self-drilling screw - Raised countersunk head with full- or partial thread**

- Carbon steel - Possible surface treatments: yellow or blue-zinc-plated, blue zinc-plated $\geq 12\mu\text{m}$, bonus- zinced, burnished, nickel-/brass plated																							
Nominal diameter		3,0	3,5	4,0	4,5	5,0	6,0																
d	Outer diameter	3,00	3,50	4,00	4,50	5,00	6,00																
	Allow. deviation	$\pm 0,30$																					
d ₁	Core diameter	2,00	2,20	2,50	2,70	3,00	4,00																
	Allow. deviation	$-0,25 / +0,10$					$\pm 0,20$																
d _h	Head diameter	6,00	7,00	8,00	9,00	10,00	12,00																
	Allow. deviation	$-0,50 / +0,10$																					
d _s	Shank diameter	2,25	2,60	2,90	3,25	3,60	4,20																
	Allow. deviation	$-0,30 / +0,10$																					
h	Head height	1,90	2,10	2,50	2,70	3,00	3,40																
p	Thread pitch	1,50	1,80	2,00	2,20	2,50	3,00-4,50																
	Allow. deviation	$\pm 10\%$																					
l _r ¹⁾	Shank ribs length	3,75	4,25	4,75	5,50	6,00	7,00																
	Allow. deviation	$\pm 0,75$					$\pm 1,00$																
Drive TX		10		20		20	25	30															
Drive PZ		1	2				3																
Screw length l _s		Standard thread length l _{gf} = Full thread l _{gp} = Partial thread Tolerance: $\pm 2,0$ ²⁾																					
Nominal length	min	max	l _{gf}	l _{gp}	l _{gf}	l _{gp}	l _{gf}	l _{gp}	l _{gf}	l _{gp}	l _{gf}	l _{gp}	l _{gf}	l _{gp}									
20	18,95	21,05	16		16		16		16														
25	23,75	26,25	21		21	18	20	18	20														
30	28,75	31,25	26	18	26	18	25	18	25	18	24												
35	33,50	36,50	31	24	31	24	30	24	30	24	29	24	28										
40	38,50	41,50	36	24	36	24	35	24	35	24	34	24	33	24									
45	43,50	46,50	41	30	41	30	40	30	40	30	39	30	38	30									
50	48,50	51,50			46	30	45	30	45	30	44	30	43	30									
55	53,50	56,50					50	36	50	36	49	36	48										
60	58,50	61,50						36		36		36	53	36									
70	68,50	71,50						42		42		42	63	42									
80	78,50	81,50						50		50		50	73	50									


All sizes in mm

- Intermediate lengths at l_s are possible
- Screws with partial thread > 50 mm length with shank ribs
- Threaded lengths between $4 \times d \leq l_g \leq l_{g\text{max}}$ are possible

²⁾ $10\text{mm} \geq l_g \leq 18\text{mm} \triangleq \pm 1,5\text{mm}$
 $18\text{mm} \geq l_g \leq 30\text{mm} \triangleq \pm 1,7\text{mm}$

fischer Power-Fast and Construction Screws	Annex A2 of European Technical Assessment ETA-11/0027
Sizes and Material	

Appendix 16 / 41

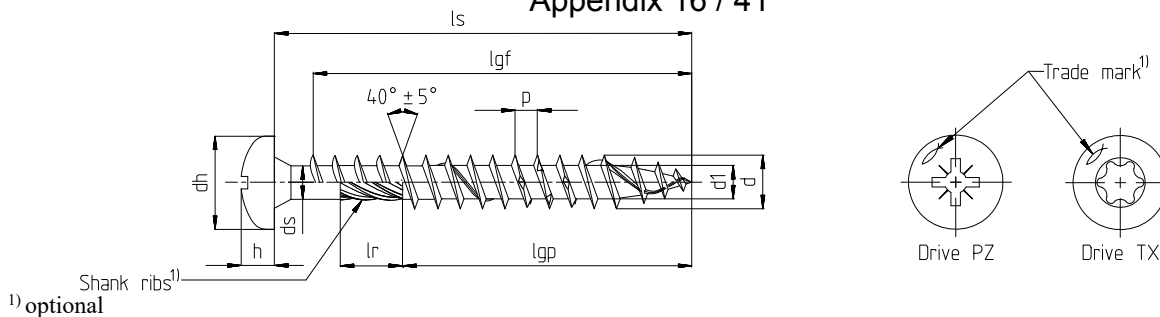

1) optional

Power-Fast self-drilling screw - Pan head with full- or partial thread

- Carbon steel
- Possible surface treatments: yellow or blue zinc-plated, blue zinc-plated $\geq 12\mu\text{m}$, bonus- zined, burnished, nickel-/brass plated

Nominal diameter		3,0	3,5	4,0	4,5	5,0	6,0										
d	Outer diameter	3,00	3,50	4,00	4,50	5,00	6,00										
	Allow. deviation	$\pm 0,30$															
d _i	Core diameter	2,00	2,20	2,50	2,70	3,00	4,00										
	Allow. deviation	$-0,25 / +0,10$				$\pm 0,20$											
d _h	Head diameter	6,00	7,00	8,00	9,00	10,00	12,00										
	Allow. deviation	$-0,50 / +0,10$															
d _s	Shank diameter	2,25	2,60	2,90	3,25	3,60	4,20										
	Allow. deviation	$-0,30 / +0,10$															
h	Head height	2,30	2,50	2,90	3,10	3,40	3,80										
	Thread pitch	1,50	1,80	2,00	2,20	2,50	3,00-4,50										
p	Allow. deviation	$\pm 10\%$															
l _r ¹⁾	Shank ribs length	3,75	4,25	4,75	5,50	6,00	7,00										
	Allow. deviation	$\pm 0,75$				$\pm 1,00$											
Drive TX		10		20		20	25	30									
Drive PZ		1	2				3										
Screw length l _s		Standard thread length l _{gf} = Full thread l _{gp} = Partial thread Tolerance: $\pm 2,0$ ²⁾															
Nominal length	min	max	l _{gf}	l _{gp}	l _{gf}	l _{gp}	l _{gf}	l _{gp}	l _{gf}	l _{gp}	l _{gf}	l _{gp}	l _{gf}	l _{gp}			
20	18,95	21,05	16		16		16		16								
25	23,75	26,25	21		21	18	20	18	20								
30	28,75	31,25	26	18	26	18	25	18	25	18	24						
35	33,50	36,50	31	24	31	24	30	24	30	24	29	24	28				
40	38,50	41,50		24	36	24	35	24	35	24	34	24	33	24			
45	43,50	46,50		30		30	40	30	40	30	39	30	38	30			
50	48,50	51,50				30	45	30	45	30	44	36	43	30			
55	53,50	56,50					50	36	50	36	49	36	48				
60	58,50	61,50						36		36		42	53	36			
70	68,50	71,50						42		42		50	63	42			
80	78,50	81,50						50		50		50	73	50			
90	88,25	91,75										60		60			
100	98,25	101,75										60		60			


All sizes in mm

- Intermediate lengths at l_s are possible
- Screws with partial thread > 50 mm length with shank ribs
- Threaded lengths between $4 \times d \leq l_g \leq l_{g\text{max}}$ are possible

²⁾ $10\text{mm} \geq l_g \leq 18\text{mm} \triangleq \pm 1,5\text{mm}$
 $18\text{mm} \geq l_g \leq 30\text{mm} \triangleq \pm 1,7\text{mm}$

fischer Power-Fast and Construction Screws	Annex A3
	of European Technical Assessment ETA-11/0027
Sizes and Material	

Appendix 17 / 41

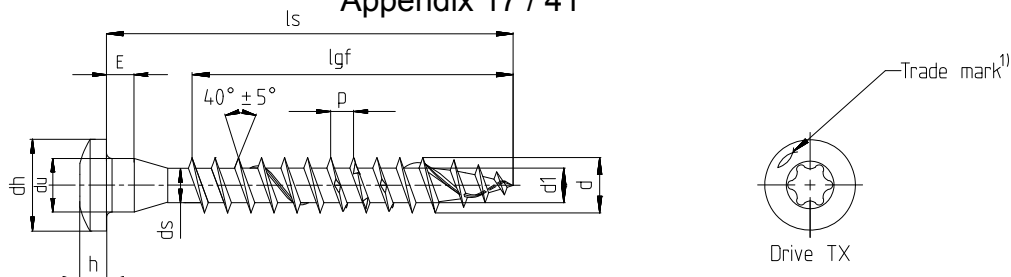

1) optional

Power-Fast self-drilling screw - Wood connector screw with full thread


- Carbon steel - Possible surface treatments: yellow or blue zinc-plated, Bonus-zinc, blue zinc-plated $\geq 12\mu\text{m}$													
Nominal diameter		5,0											
d	Outer diameter	5,00											
	Allow. deviation	-0,30											
d ₁	Core diameter	3,00											
	Allow. deviation	$\pm 0,20$											
d _u	Underhead diameter	5,00											
	Allow. deviation	-0,35											
d _h	Head diameter	8,25											
	Allow. deviation	$\pm 0,40$											
E	Height	2,50											
	Allow. deviation	$\pm 0,30$											
h	Head height	2,60											
p	Thread pitch	2,50											
	Allow. deviation	$\pm 10\%$											
Drive TX		20	25										
Screw length l _s			Standard thread length l _{gf} = Full thread l _{gp} = Partial thread Tolerance: $\pm 2,0^{2)}$										
Nominal length	min	max	l _{gf}	l _{gp}									
20	18,95	21,05	14										
25	23,75	26,25	19										
30	28,75	31,25	24										
35	33,50	36,50	29										
40	38,50	41,50	34										
45	43,50	46,50	39										
50	48,50	51,50	44										
55	53,50	56,50	49										
60	58,50	61,50	54										
70	68,50	71,50	64										
80	78,50	81,50	74										

All sizes in mm

- Intermediate lengths at l_s are possible
- Threaded lengths between $4 \times d \leq l_g \leq l_{gmax}$ are possible

- 2) $10\text{mm} \geq l_g \leq 18\text{mm} \triangleq \pm 1,5\text{mm}$
 $18\text{mm} \geq l_g \leq 30\text{mm} \triangleq \pm 1,7\text{mm}$

fischer Power-Fast and Construction Screws	Annex A4
	of European Technical Assessment ETA-11/0027
Sizes and Material	

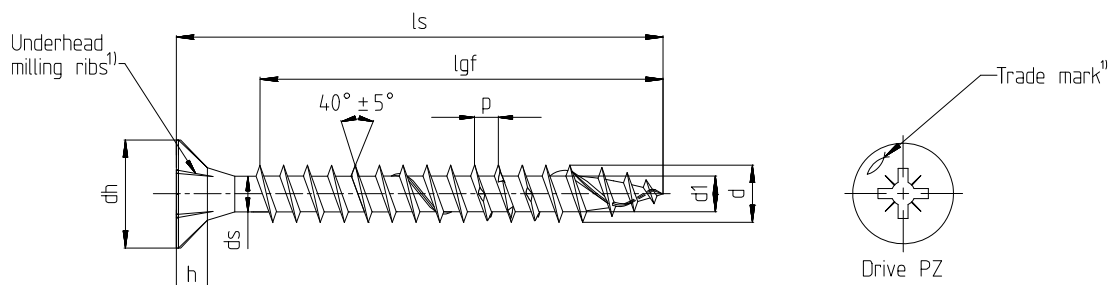

¹⁾ optional

Power-Fast self-drilling screw - Small countersunk head with full thread


- Carbon steel - Possible surface treatments: yellow or blue zinc-plated, blue zinc-plated $\geq 12\mu\text{m}$																
Nominal diameter		3,0	3,5	4,0												
d	Outer diameter	3,00	3,50	4,00												
	Allow. deviation	$\pm 0,30$														
d ₁	Core diameter	2,00	2,20	2,50												
	Allow. deviation	$-0,25 / +0,10$														
d _h	Head diameter	5,00	6,00	7,00												
	Allow. deviation	$-0,50 / +0,10$														
h	Head height	1,90	2,10	2,50												
p	Thread pitch	1,50	1,80	2,00												
	Allow. deviation	$\pm 10\%$														
Drive PZ		1	2													
Screw length l _s		Standard thread length l _{gf} = Full thread l _{gp} = Partial thread Tolerance: $\pm 2,0$ ²⁾														
Nominal length	min	max	l _{gf}	l _{gp}	l _{gf}	l _{gp}	l _{gf}	l _{gp}								
20	18,95	21,05	16		16		16									
25	23,75	26,25	21		21		20									
30	28,75	31,25	26													

All sizes in mm

- Intermediate lengths at l_s are possible
- Threaded lengths between $4 \times d \leq l_g \leq l_{g\text{max}}$ are possible

- ²⁾ $10\text{mm} \geq l_g \leq 18\text{mm} \triangleq \pm 1,5\text{mm}$
 $18\text{mm} \geq l_g \leq 30\text{mm} \triangleq \pm 1,7\text{mm}$

fischer Power-Fast and Construction Screws	Annex A5 of European Technical Assessment ETA-11/0027
Sizes and Material	

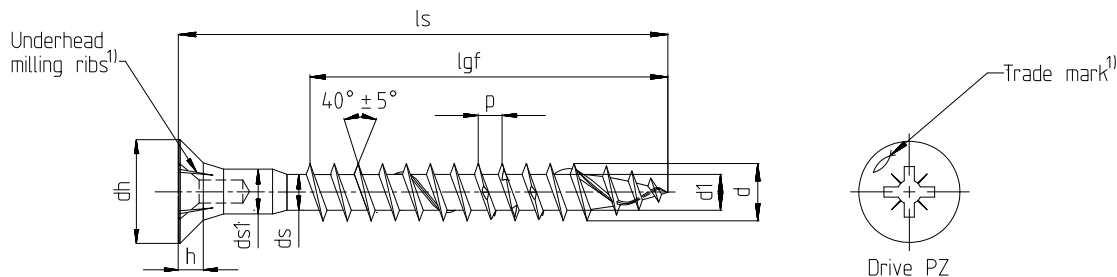

¹) optional

Power-Fast self-drilling screw - Countersunk headhole screw with full thread

- Carbon steel - Possible surface treatments: blue zinc-plated, blue zinc-plated $\geq 12\mu\text{m}$																
Nominal diameter		4,0	4,5	5,0	6,0											
d	Outer diameter	4,00	4,50	5,00	6,00											
	Allow. deviation	$\pm 0,30$														
d ₁	Core diameter	2,50	2,70	3,00	4,00											
	Allow. deviation	$-0,25 / +0,10$				$\pm 0,20$										
d _h	Head diameter	8,00	9,00	10,00	12,00											
	Allow. deviation	$-0,50 / +0,10$														
d _s	Shank diameter	2,90	3,25	3,60	4,30											
	Allow. deviation	$-0,30 / +0,10$														
h	Head height	2,50	2,70	3,00	3,80											
	Thread pitch	2,00	2,20	2,50	3,00-4,50											
p	Allow. deviation	$\pm 10\%$														
	Shank diameter	3,70	3,85	4,50	4,20											
d _{s1}	Allow. deviation	$-0,10$														
	Drive PZ	2				3										
Screw length l _s		Standard thread length l _{gf} = Full thread l _{gp} = Partial thread Tolerance: $\pm 2,0^{2)}$														
Nominal length	min	max	l _{gf}	l _{gp}	l _{gf}	l _{gp}	l _{gf}	l _{gp}	l _{gf}	l _{gp}						
25	23,75	26,25	17,5													
27	25,75	28,25	19,5													
30	28,75	31,25	22,5		19											
35	33,50	36,50	27,5		24											
40	38,50	41,50	32,5		29		29									
45	43,50	46,50	37,5		34		34									
50	48,50	51,50	42,5		39		39		41							
55	53,50	56,50	47,5		44		44		46							
60	58,50	61,50	50,0		49		49		51							
70	68,50	71,50			59		60		60							
80	78,50	81,50			59		60		60							
90	88,25	91,75			59		60		60							
100	98,25	101,75					60		60							


All sizes in mm

- Intermediate lengths at l_s are possible
- Threaded lengths between $4 \times d \leq l_g \leq l_{g\text{max}}$ are possible

- ²) $10\text{mm} \geq l_g \leq 18\text{mm} \triangleq \pm 1,5\text{mm}$
 $18\text{mm} \geq l_g \leq 30\text{mm} \triangleq \pm 1,7\text{mm}$

fischer Power-Fast and Construction Screws	Annex A6 of European Technical Assessment ETA-11/0027
Sizes and Material	

Appendix 20 / 41

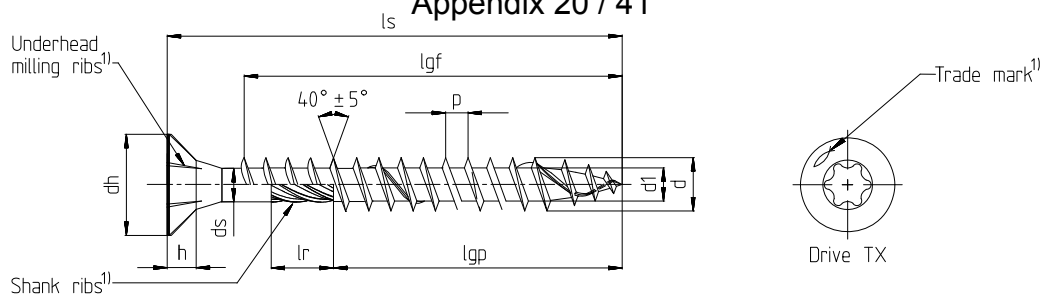

1) optional


Power-Fast wood construction screw - Countersunk head with full- or partial thread

- Carbon steel - Possible surface treatments: yellow or blue zinc-plated, blue zinc-plated $\geq 12\mu\text{m}$, bonus-zinc																		
Nominal diameter			6,0	8,0	10,0	12,0												
d	Outer diameter		6,00	8,00	10,00	12,00												
	Allow. deviation		$\pm 0,30$			$\pm 0,40$	$\pm 0,50$											
d _i	Core diameter		4,00	5,40	6,40	7,60												
	Allow. deviation		$\pm 0,20$			$\pm 0,30$												
d _h	Head diameter		12,00	14,40	18,40	22,40												
	Allow. deviation		-0,50 / +0,10	$\pm 0,40$			$\pm 0,50$											
d _s	Shank diameter		4,30	5,90	7,10	8,30												
	Allow. deviation		-0,30 / +0,10	$\pm 0,20$														
h	Head height		3,80	5,10	6,10	7,20												
	Thread pitch		3,00-4,50	6,00	7,50													
p	Allow. deviation		$\pm 10\%$															
	Shank ribs length		8,00	13,00														
l _r 1)	Allow. deviation		$-2,00$															
	Drive TX		30	40		50												
			Standard thread length l _{gf} = Full thread l _{gp} =Partial thread Tolerance: $\pm 2,0$															
Nominal length	min	max	l _{gf}	l _{gp}	l _{gf}	l _{gp}	l _{gf}	l _{gp}	l _{gf}	l _{gp}								
60	58,50	61,50	50	36														
80	78,50	81,50	70	50	70	50		52										
90	88,25	91,75		60	80	50												
100	98,25	101,75		60	80	50		52		60								
120	118,25	121,75		70	100	75		80		80								
140	138,00	142,00		70		75		80		80								
160	158,00	162,00		70		75		80		80								
180	178,00	182,00		70		75		100		100								
200	198,00	202,00		70		100		100		100								
220	218,00	222,00		70		100		100		100								
240	238,00	242,00		70		100		100		120								
260	258,00	262,00		70		100		100		120								
280	278,00	282,00		70		100		115		120								
300	298,00	302,00		70		100		115		120								
320	317,00	323,00				100		115										
330	327,00	333,00						115										
340	337,00	343,00				100		115										
350	347,00	353,00								145								
360	357,00	363,00				100		115										
380	377,00	383,00				100		115										
400	397,00	403,00																
450/500	l _s -3,00	l _s +3,00				100		115		145								
550/600	l _s -3,00	l _s +3,00								145								

All sizes in mm

- Intermediate lengths at l_s are possible
- Threaded lengths between $4 \times d \leq l_g \leq l_{g\text{max}}$ are possible

fischer Power-Fast and Construction Screws	Annex A7 of European Technical Assessment ETA-11/0027
Sizes and Material	

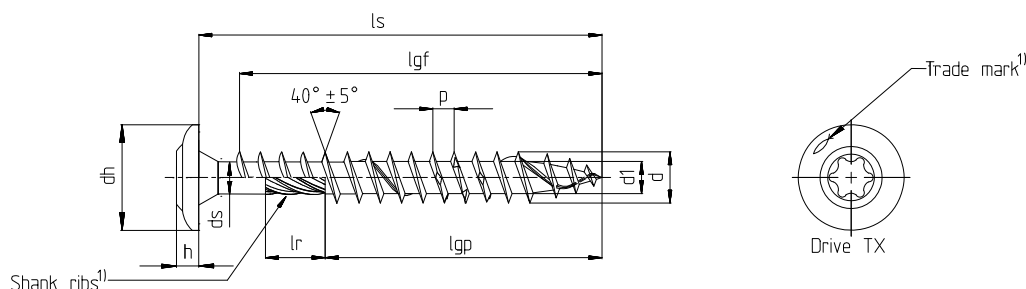

¹⁾ optional

Power-Fast wood construction screw - Flange head with full- or partial thread


- Carbon steel
- Possible surface treatments: yellow or blue zinc-plated, blue zinc-plated $\geq 12\mu\text{m}$, bonus-zinc

Nominal diameter		6,0	8,0	10,0	12,0												
d	Outer diameter	6,00	8,00	10,00	12,00												
	Allow. deviation	$\pm 0,30$		$\pm 0,40$	$\pm 0,50$												
d _i	Core diameter	4,00	5,40	6,40	7,60												
	Allow. deviation	$\pm 0,20$			$\pm 0,30$												
d _h	Head diameter	13,70	21,00	24,70	27,90												
	Allow. deviation	-0,70/+1,30	$\pm 1,00$	-1,20/+2,80	-1,40/+2,60												
d _s	Shank diameter	4,30	5,90	7,10	8,30												
	Allow. deviation	-0,30/+0,10	$\pm 0,20$		$\pm 0,30$												
h	Head height	3,50		5,60	6,70												
	Allow. deviation	$\pm 1,00$		$\pm 0,50$													
p	Thread pitch	3,00-4,50	6,00	7,50													
	Allow. deviation	$\pm 10\%$															
l _r ¹⁾	Shank rib length	8,00	13,00														
	Allow. deviation	$-2,00$															
Drive TX		30	40	50													
Screw length l _s		Standard thread length l _{gf} = Full thread l _{gp} = Partial thread Tolerance: $\pm 2,0$															
Nominal length	min	max	l _{gf}	l _{gp}	l _{gf}	l _{gp}	l _{gf}	l _{gp}	l _{gf}	l _{gp}							
60	58,50	61,50	50	36													
80	78,50	81,50	70	50	70	50		52									
90	88,25	91,75		60	80	50											
100	98,25	101,75		60	80	50		52		60							
120	118,25	121,75		70	100	75		80		80							
140	138,00	142,00		70		75		80		80							
160	158,00	162,00		70		75		80		80							
180	178,00	182,00		70		75		100		100							
200	198,00	202,00		70		100				100							
220	218,00	222,00		70		100		100		100							
240	238,00	242,00		70		100		100		100							
260	258,00	262,00		70		100		100		100							
280	278,00	282,00		70		100		115		120							
300	298,00	302,00		70		100		115		120							
320	317,00	323,00				100		115									
330	327,00	333,00						115									
340	337,00	343,00				100		115									
350	347,00	353,00								145							
in steps of 10mm																	
360-500	l _s -3,00	l _s +3,00				100		115									
in steps of 50mm																	
550-600	l _s -3,00	l _s +3,00								145							

All sizes in mm

- Intermediate lengths at l_s are possible
- Threaded lengths between $4 \times d \leq l_g \leq l_{g\text{max}}$ are possible

fischer Power-Fast and Construction Screws	Annex A8 of European Technical Assessment ETA-11/0027
Sizes and Material	

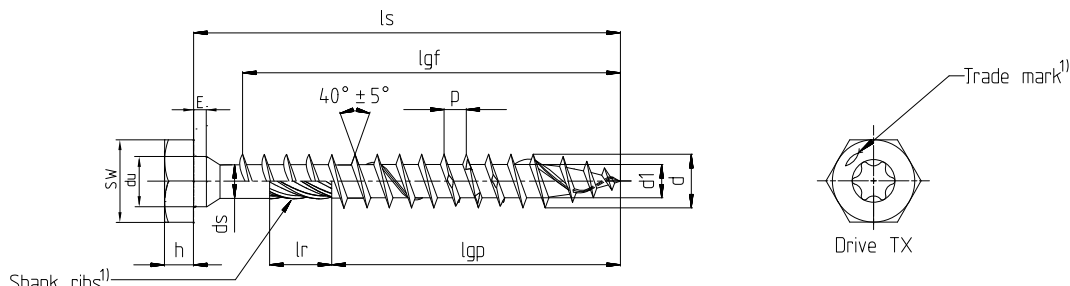

¹⁾ optional

Power-Fast wood construction screw - Hexagon head with full- or partial thread


- Carbon steel - Possible surface treatments: yellow or blue zinc-plated, blue zinc-plated $\geq 12\mu\text{m}$, bonus-zinc																
Nominal diameter		6,0	8,0	10,0	12,0											
d	Outer diameter	6,00	8,00	10,00	12,00											
	Allow. deviation	$\pm 0,30$		$\pm 0,40$	$\pm 0,50$											
d _i	Core diameter	4,00	5,40	6,40	7,60											
	Allow. deviation	$\pm 0,20$			$\pm 0,30$											
d _u	Underhead diameter	6,25	8,25	10,30	12,40											
	Allow. deviation	$-0,80$		$-0,90$	$-1,00$											
SW	Wrench size	9,90	12,80	14,80	16,80											
	Allow. deviation	$\pm 0,30$														
E	Height	2,00	2,10	2,30	3,30											
	Allow. deviation	$\pm 0,50$														
d _s	Shank diameter	4,30	5,90	7,10	8,30											
	Allow. deviation	$-0,30/+0,10$		$\pm 0,20$												
h	Head height	4,00	4,50	5,20	5,70											
	Allow. deviation	$\pm 0,30$	$\pm 0,40$	$\pm 0,50$												
p	Thread pitch	3,00-4,50	6,00	7,50												
	Allow. deviation	$\pm 10\%$														
l _r ¹⁾	Shank rib length	8,00		13,00												
	Allow. deviation	$-2,00$														
Drive TX		30		40	50											
Screw length l _s		Standard thread length l _{gf} = Full thread l _{gp} = Partial thread Tolerance: $\pm 2,0^{2)}$														
Nominal length	min	max	l _{gf}	l _{gp}	l _{gf}	l _{gp}	l _{gf}	l _{gp}	l _{gf}	l _{gp}						
60	58,5	61,5	50	30												
80	78,5	81,5	70	50	70	50		52								
90	88,25	91,75		60	80	50										
100	98,25	101,75		60	80	50		52		60						
120	118,25	121,75		70	100	75		80		80						
140/160	l _s - 2,00	l _s + 2,00		70		75		80		80						
180	178,00	182,00		70		75		100		100						
200/220	l _s - 2,00	l _s + 2,00		70		100		100		100						
240/260	l _s - 2,00	l _s + 2,00		70		100		100		120						
280/300	l _s - 2,00	l _s + 2,00		70		100		115		120						
320	317,00	323,00				100		115								
330	327,00	333,00						115								
340	337,00	343,00				100		115								
350	347,00	353,00								145						
360/380	l _s - 3,00	l _s + 3,00				100		115								
in steps of 50mm																
400-500	l _s - 3,00	l _s + 3,00				100		115		145						
550/600	l _s - 3,00	l _s + 3,00								145						

All sizes in mm

- Intermediate lengths at l_s are possible
- Threaded lengths between $4 \times d \leq l_g \leq l_{g\text{max}}$ are possible

²⁾ $18\text{mm} \geq l_g \leq 30\text{mm} \triangleq \pm 1,7\text{mm}$

fischer Power-Fast and Construction Screws	Annex A9 of European Technical Assessment ETA-11/0027
Sizes and Material	

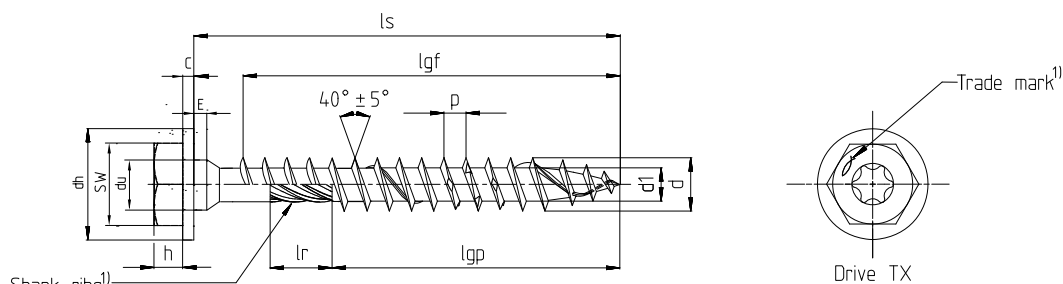

1) optional

Power-Fast wood construction screw - Hexagon head with washer and full- or partial thread

- Carbon steel
- Possible surface treatments: yellow or blue zinc-plated, blue zinc-plated $\geq 12\mu\text{m}$, bonus-zinc


Nominal diameter		6,0	8,0	10,0	12,0														
d	Outer diameter	6,00	8,00	10,00	12,00														
	Allow. deviation	$\pm 0,30$		$\pm 0,40$		$\pm 0,50$													
d _i	Core diameter	4,00	5,40	6,40	7,60														
	Allow. deviation	$\pm 0,20$		$\pm 0,30$															
d _h	Head diameter	15,00	18,00	21,50	23,40														
	Allow. deviation	1,20		1,50															
d _u	Underhead diameter	6,25	8,25	10,30	12,40														
	Allow. deviation	-0,80		-0,90		-1,00													
SW	Wrench size	9,90	12,80	14,80	16,80														
	Allow. deviation	$\pm 0,30$		$\pm 0,30$															
c	Washer height	1,80	2,00	2,20	2,50														
E	Height	2,00	2,10	2,30	3,30														
	Allow. deviation	$\pm 0,50$		$\pm 0,50$															
d _s	Shank diameter	4,30	5,90	7,10	8,30														
	Allow. deviation	-0,30/+0,10		$\pm 0,20$															
h	Head height	4,00	4,50	5,20	5,70														
	Allow. deviation	$\pm 0,30$	$\pm 0,40$	$\pm 0,50$															
p	Thread pitch	3,00-4,50	6,00	7,50															
	Allow. deviation	$\pm 10\%$		$\pm 10\%$															
l _r ¹⁾	Shank rib length	8,00		13,00															
	Allow. deviation	-2,00		-2,00															
Drive TX		30	40	50															
Screw length l _s		Standard thread length l _{gf} = Full thread l _{gp} = Partial thread Tolerance: $\pm 2,0$ ²⁾																	
Nominal length	min	max	l _{gf}	l _{gp}	l _{gf}	l _{gp}	l _{gf}	l _{gp}	l _{gf}	l _{gp}									
60	58,50	61,50	50	30															
80	78,50	81,50	70	50	70	50		52											
90	88,25	91,75		60	80	50													
100	98,25	101,75		60	80	50		52		60									
120	118,25	121,75		70	100	75		80		80									
140/160	l _s -2,00	l _s +2,00		70		75		80		80									
180	178,00	182,00		70		75		100		100									
200/220	l _s -2,00	l _s +2,00		70		100		100		100									
240/260	l _s -2,00	l _s +2,00		70		100		100		120									
280/300	l _s -2,00	l _s +2,00		70		100		115		120									
320	317,00	323,00				100		115											
330	327,00	333,00						115											
340	337,00	343,00				100		115											
350	347,00	353,00								145									
360/380	l _s -3,00	l _s +3,00				100		115											
in steps of 50mm																			
400-500	l _s -3,00	l _s +3,00				100		115		145									
550/600	l _s -3,00	l _s +3,00								145									

All sizes in mm

- Intermediate lengths at l_s are possible
- Threaded lengths between $4 \times d \leq l_g \leq l_{g\text{max}}$ are possible

²⁾ 18mm $\geq l_g \geq 30\text{mm} \pm 1,7\text{mm}$

fischer Power-Fast and Construction Screws	Annex A10 of European Technical Assessment ETA-11/0027
Sizes and Material	

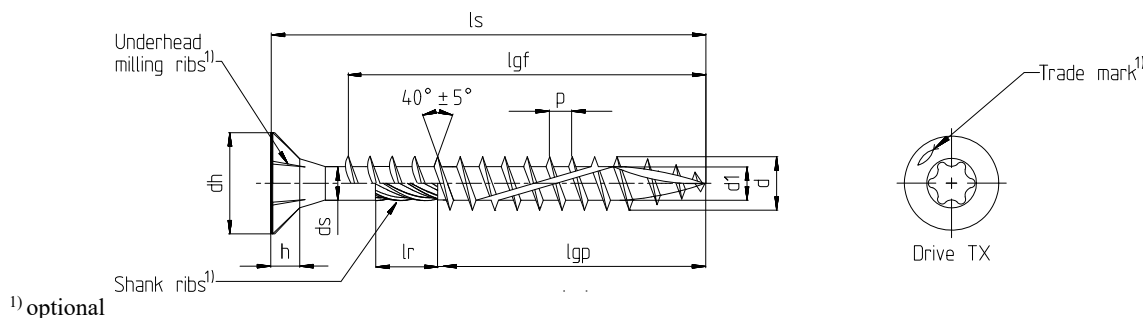

FCS wood construction screw - Countersunk head with full- or partial thread


▪ Carbon steel ▪ Possible surface treatments: yellow or blue zinc-plated, blue zinc-plated ≥12µm, bonus-zincd																
Nominal diameter		8,0	10,0													
d	Outer diameter	8,00	10,00													
	Allow. deviation	±0,30	±0,40													
d ₁	Core diameter	5,40	6,35													
	Allow. deviation	-0,30/+0,20														
d _h	Head diameter	14,40	18,40													
	Allow. deviation	±0,40														
d _s	Shank diameter	5,90	7,10													
	Allow. deviation	-0,30/+0,10														
h	Head height	6,00-7,00	7,50-8,50													
P	Thread pitch	5,20	5,60													
	Allow. deviation	±10%														
l _r ¹⁾	Shank rib length	13,0														
	Allow. deviation	-2,00														
Drive TX		40														
Screw length l _s		Standard thread length l _{gf} = Full thread l _{gp} =Partial thread Tolerance: ± 2,0														
Nominal length	min	max	l _{gf}	l _{gp}	l _{gf}	l _{gp}										
80	78,50	81,50	70	50		52										
90	88,25	91,75	80	50		52										
100	98,25	101,75	80	50		52										
110	108,25	111,75	100	75		80										
120	118,25	121,75		75		80										
in steps of 10mm																
130-400	l _s -2,00	l _s +2,00		75		80										

All sizes in mm

- Intermediate lengths at l_s are possible
- Threaded lengths between $4 \times d \leq l_g \leq l_{g\text{max}}$ are possible

fischer Power-Fast and Construction Screws	Annex A11
	of European Technical Assessment ETA-11/0027
Sizes and Material	

Appendix 25 / 41

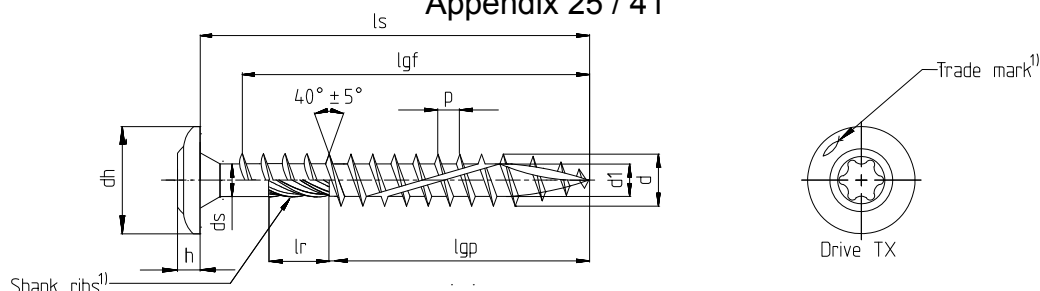

1) optional

FCS wood construction screw - Flange head with partial thread

- Carbon steel
- Possible surface treatments: yellow or blue zinc-plated, blue zinc-plated $\geq 12\mu\text{m}$


Nominal diameter		8,0	10,0														
d	Outer diameter	8,00	10,00														
	Allow. deviation	-0,40/+0,30	$\pm 0,40$														
d ₁	Core diameter	5,40	6,35														
	Allow. deviation	$\pm 0,30$															
d _h	Head diameter	21,00	24,70														
	Allow. deviation	$\pm 1,00$	-1,20/+2,80														
d _s	Shank diameter	5,90	7,10														
	Allow. deviation	-0,30/+0,20															
h	Head height	2,50-4,50	3,70-5,70														
	Thread pitch	5,20	5,60														
p	Thread pitch	5,20	5,60														
	Allow. deviation	$\pm 10\%$															
l _r ¹⁾	Shank rib length	12,00															
	Allow. deviation	$\pm 1,00$															
Drive TX		40															
Screw length l _s		Standard thread length l _{gf} = Full thread l _{gp} = Partial thread Tolerance: $\pm 2,0$															
Nominal length	min	max	l _{gf}	l _{gp}	l _{gf}	l _{gp}											
80	78,50	81,50	70	50		52											
90	88,25	91,75	80	50		52											
100	98,25	101,75	80	50		52											
110	108,25	111,75	100	75		80											
120	118,25	121,75		75		80											
in steps pf 10mm																	
130-400	l _s -2,00	l _s +2,00		75		80											

All sizes in mm

- Intermediate lengths at l_s are possible
- Threaded lengths between $4 \times d \leq l_g \leq l_{g\text{max}}$ are possible

fischer Power-Fast and Construction Screws	Annex A12
	of European Technical Assessment ETA-11/0027
Sizes and Material	

Appendix 26 / 41

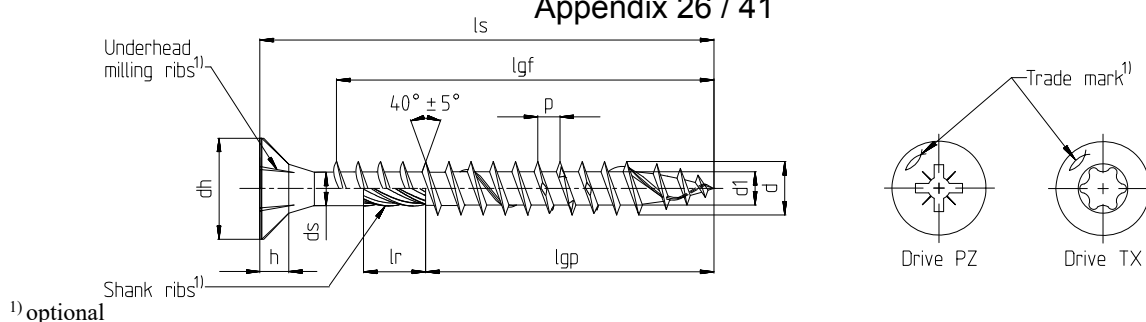**Power-Fast self-drilling screw - Countersunk head with full- or partial thread**

▪ Stainless steel																	
Nominal diameter			3,0	3,5	4,0	4,5	5,0	6,0									
d	Outer diameter		3,00	3,50	4,00	4,50	5,00	6,00									
	Allow. deviation		±0,30														
d ₁	Core diameter		2,00	2,20	2,50	2,70	3,00	4,00									
	Allow. deviation		-0,25 / +0,10						±0,20								
d _h	Head diameter		6,00	7,00	8,00	9,00	10,00	12,00									
	Allow. deviation		-0,50 / +0,10														
d _s	Shank diameter		2,25	2,60	2,90	3,25	3,60	4,30									
	Allow. deviation		-0,30 / +0,10														
h	Head height		1,90	2,10	2,50	2,70	3,00	3,80									
p	Thread pitch		1,50	1,80	2,00	2,20	2,50	3,00-4,50									
	Allow. deviation		±10%														
l _r ¹⁾	Shank rib length		3,75	4,25	4,75	5,50	6,00	7,00									
	Allow. deviation		±0,75						±1,00								
Drive TX			10			20			20	25	30						
Drive PZ			1	2									3				
Screw length l _s			Standard thread length l _{gf} = Full- thread l _{gp} =Partial thread Tolerance: ± 2,0 ²⁾														
Nominal length	min	max	l _{gf}	l _{gp}	l _{gf}	l _{gp}	l _{gf}	l _{gp}	l _{gf}	l _{gp}	l _{gf}	l _{gp}	l _{gf}	l _{gp}			
20	18,95	21,05	16		16		16		16								
25	23,75	26,25	21		21	18	20	18	20								
30	28,75	31,25	26	18	26	18	25	18	25	18	24						
35	33,50	36,50	31	24	31	24	30	24	30	24	29	24	28				
40	38,50	41,50	36	24	36	24	35	24	35	24	34	24	33	24			
45	43,50	46,50	41	30	41	30	40	30	40	30	39	30	38	30			
50	48,50	51,50			46	30	45	30	45	30	44	30	43	30			
55	53,50	56,50					50	36	50	36	49	36	48				
60	58,50	61,50						36		36		36	53	36			
70	68,50	71,50						42		42		42	63	42			
80	78,50	81,50						50		50		50	73	50			
90	88,25	91,75										60		60			
100	98,25	101,75										60		60			
110	108,25	111,75										70		70			
120	118,25	121,75										70		70			
in steps of 10mm																	
130-300	l _s -2,00	l _s +2,00												70			


All sizes in mm

- Intermediate lengths at l_s are possible
- Screws with partial thread > 50 mm length with shank ribs
- Threaded lengths between 4×d ≤ l_g ≤ l_{gmax} are possible

²⁾ 10mm ≥ l_g ≤ 18mm ≙ ±1,5mm
18mm ≥ l_g ≤ 30mm ≙ ±1,7mm

fischer Power-Fast and Construction Screws	Annex A13
	Sizes and Material of European Technical Assessment ETA-11/0027

Appendix 27 / 41

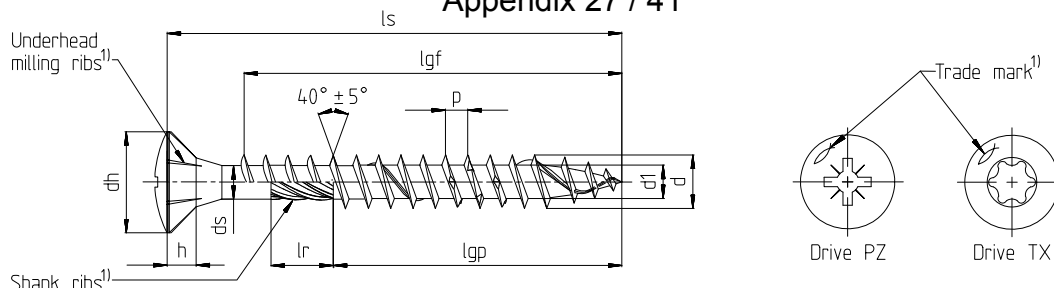

1) optional

Power-Fast self-drilling screw - Raised countersunk head with full- or partial thread

■ Stainless steel																
Nominal diameter			3,0	3,5	4,0	4,5	5,0	6,0								
d	Outer diameter		3,00	3,50	4,00	4,50	5,00	6,00								
	Allow. deviation		±0,30													
d _i	Core diameter		2,00	2,20	2,50	2,70	3,00	4,00								
	Allow. deviation		-0,25 / +0,10						±0,20							
d _h	Head diameter		6,00	7,00	8,00	9,00	10,00	12,00								
	Allow. deviation		-0,50 /+0,10													
d _s	Shank diameter		2,25	2,60	2,90	3,25	3,60	4,30								
	Allow. deviation		-0,30 / +0,10													
h	Head height		1,90	2,10	2,50	2,70	3,00	3,80								
p	Thread pitch		1,50	1,80	2,00	2,20	2,50	3,00-4,50								
	Allow. deviation		±10%													
l _r ¹⁾	Shank ribs length		3,75	4,25	4,75	5,50	6,00	7,00								
	Allow. deviation		±0,75					±1,00								
Drive TX			10			20			20	25	30					
Drive PZ			1	2							3					
Screw length l _s			Standard thread length l _{gf} = Full thread l _{gp} =Partial thread Tolerance: ± 2,0 ²⁾													
Nominal length	min	max	l _{gf}	l _{gp}	l _{gf}	l _{gp}	l _{gf}	l _{gp}	l _{gf}	l _{gp}	l _{gf}	l _{gp}	l _{gf}	l _{gp}		
20	18,95	21,05	16		16		16		16							
25	23,75	26,25	21		21	18	21	18	20							
30	28,75	31,25	26	18	26	18	26	18	25	18	24					
35	33,50	36,50	31	24	31	24	31	24	30	24	29	24	28			
40	38,50	41,50		24	36	24	36	24	35	24	34	24	33			
45	43,50	46,50		30		30	41	30	40	30	39	30	38			
50	48,50	51,50				30	46	30	45	30	44	30	43			
55	53,50	56,50						36		36		36				
60	58,50	61,50						36		36		36	53			
70	68,50	71,50						42		42		42	63			
80	78,50	81,50						50		50		50	73			


All sizes in mm

- Intermediate lengths at l_s are possible
- Screws with partial thread > 50 mm length with shank ribs
- Threaded lengths between 4×d ≤ l_g ≤ l_{gmax} are possible

²⁾ 10mm ≥ l_g ≤ 18mm ≅ ±1,5mm
 18mm ≥ l_g ≤ 30mm ≅ ±1,7mm

fischer Power-Fast and Construction Screws	Annex A14
	of European Technical Assessment ETA-11/0027
Sizes and Material	

Appendix 28 / 41

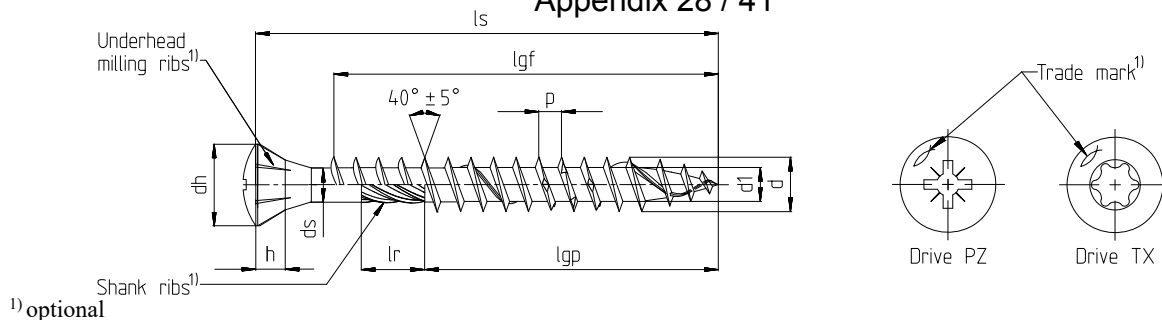**Power-Fast self-drilling screw – Facade screw with full- or partial thread**


■ Stainless steel																
Nominal diameter		4,0	4,5	5,0												
d	Outer diameter	4,00	4,50	5,00												
	Allow. deviation	±0,30														
d _i	Core diameter	2,50	2,70	3,00												
	Allow. deviation	-0,25 / +0,10			±0,20											
d _h	Head diameter	6,90	6,90	7,80												
	Allow. deviation	±0,50														
d _s	Shank diameter	2,90	3,25	3,60												
	Allow. deviation	-0,30 / +0,10														
h	Head height	2,50	2,70	3,00												
p	Thread pitch	2,00	2,20	2,50												
	Allow. deviation	±10%														
l _r ¹⁾	Shank ribs length	4,75	5,50	6,00												
	Allow. deviation	±0,75	±1,00													
Drive TX		20			20	25										
Drive PZ		2														
Screw length l _s		Standard thread length l _{gf} = Full thread l _{gp} =Partial thread Tolerance: ± 2,0 ²⁾														
Nominal length	min	max	l _{gf}	l _{gp}	l _{gf}	l _{gp}	l _{gf}	l _{gp}								
20	18,95	21,05	16		16											
25	23,75	26,25	21	18	20											
30	28,75	31,25	26	18	25	18	24									
35	33,50	36,50	31	24	30	24	29	24								
40	38,50	41,50	36	24	35	24	34	24								
45	43,50	46,50	41	30	40	30	39	30								
50	48,50	51,50	46	30	45	30	44	30								
55	53,50	56,50		36		36		36								
60	58,50	61,50		36		36		36								
70	68,50	71,50		42		42		42								
80	78,50	81,50		50		50		50								
90	88,25	91,75						60								
100	98,25	101,75						60								
110	108,25	111,75						70								
120	118,25	121,75						70								

All sizes in mm

- Intermediate lengths at l_s are possible
- Screws with partial thread > 50 mm length with shank ribs
- Threaded lengths between 4×d ≤ l_g ≤ l_{gmax} are possible

²⁾ 10mm ≥ l_g ≤ 18mm ≅ ±1,5mm
 18mm ≥ l_g ≤ 30mm ≅ ±1,7mm

fischer Power-Fast and Construction Screws	Annex A15
	Sizes and Material of European Technical Assessment ETA-11/0027

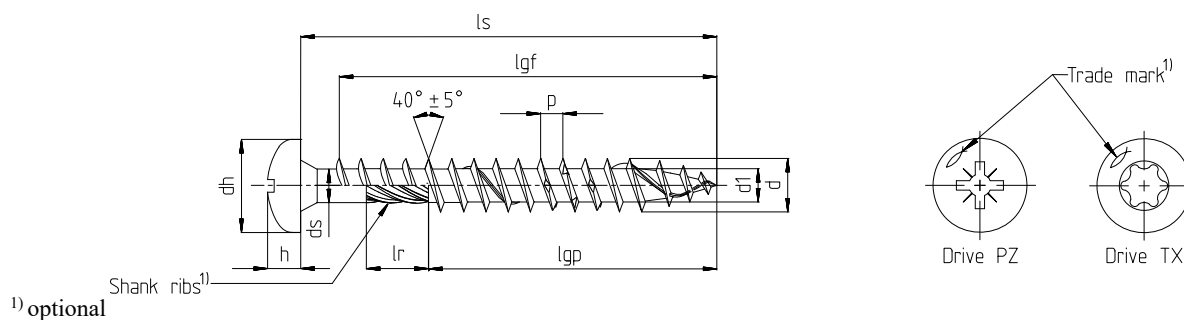

Power-Fast self-drilling screw - Pan head with full- or partial thread

▪ Stainless steel																
Nominal diameter			3,0		3,5		4,0		4,5		5,0		6,0			
d	Outer diameter		3,00		3,50		4,00		4,50		5,00		6,00			
	Allow. deviation		±0,30													
d _i	Core diameter		2,00		2,20		2,50		2,70		3,00		4,00			
	Allow. deviation		-0,25 / +0,10										±0,20			
d _h	Head diameter		6,00		7,00		8,00		9,00		10,00		12,00			
	Allow. deviation		-0,50 / +0,10													
d _s	Shank diameter		2,25		2,60		2,90		3,25		3,60		4,30			
	Allow. deviation		-0,30 / +0,10													
h	Head height		2,30		2,50		2,90		3,10		3,40		3,80			
p	Thread pitch		1,50		1,80		2,00		2,20		2,50		3,00-4,50			
	Allow. deviation		±10%													
l _r ¹⁾	Shank ribs length		3,75		4,25		4,75		5,50		6,00		7,00			
	Allow. deviation		±0,75						±1,00							
Drive TX			10				20				20		25		30	
Drive PZ			1		2										3	
Screw length l _s			Standard thread length l _{gf} = Full thread l _{gp} =Partial thread Tolerance: ± 2,0 ²⁾													
Nominal length	min	max	l _{gf}	l _{gp}	l _{gf}	l _{gp}	l _{gf}	l _{gp}	l _{gf}	l _{gp}	l _{gf}	l _{gp}	l _{gf}	l _{gp}		
20	18,95	21,05	16		16		16									
25	23,75	26,25	21		21	18	20	18	20							
30	28,75	31,25	26	18	26	18	25	18	25	18	24					
35	33,50	36,50	31	24	31	24	30	24	30	24	29	24	28			
40	38,50	41,50		24	36	24	35	24	35	24	34	24	33	24		
45	43,50	46,50		30		30	40	30	40	30	39	30	38	30		
50	48,50	51,50				30	45	30	45	30	44	36	43	30		
55	53,50	56,50					50	36	50	36	49	36	48			
60	58,50	61,50						36		36		42	53	36		
70	68,50	71,50						42		42		50	63	42		
80	78,50	81,50						50		50		50	73	50		
90	88,25	91,75										60		60		
100	98,25	101,75										60		60		


All sizes in mm

- Intermediate lengths at l_s are possible
- Screws with partial thread > 50 mm length with shank ribs
- Threaded lengths between 4×d ≤ l_g ≤ l_{gmax} are possible

²⁾ 10mm ≥ l_g ≤ 18mm ± 1,5mm
18mm ≥ l_g ≤ 30mm ± 1,7mm

fischer Power-Fast and Construction Screws	Annex A16
	of European Technical Assessment ETA-11/0027
Sizes and Material	

Appendix 30 / 41

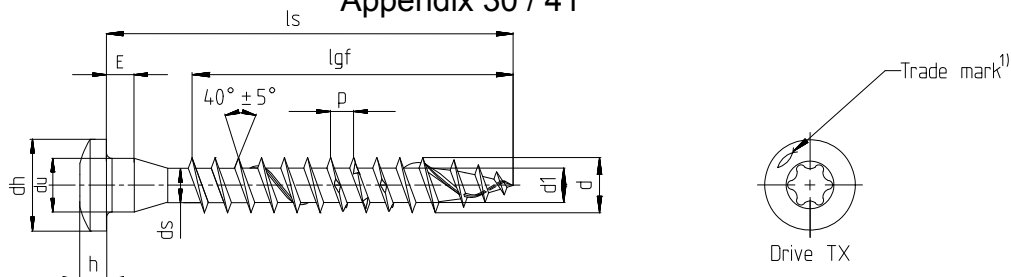

1) optional

Power-Fast self-drilling screw - Wood connector screw with full thread

Stainless steel																
Nominal diameter		5,0														
d	Outer diameter	5,00														
	Allow. deviation	-0,30														
d _i	Core diameter	3,00														
	Allow. deviation	±0,20														
d _u	Underhead diameter	5,00														
	Allow. deviation	-0,35														
d _h	Head diameter	8,25														
	Allow. deviation	±0,40														
E	Height	2,50														
	Allow. deviation	±0,30														
h	Head height	2,60														
p	Thread pitch	2,50														
	Allow. deviation	±10%														
Drive TX		20	25													
Screw length l _s			Standard thread length l _{gf} = Full thread l _{gp} = Partial thread Tolerance: ± 2,0 ²⁾													
Nominal length	min	max	l _{gf}	l _{gp}												
20	18,95	21,05	14													
25	23,75	26,25	19													
30	28,75	31,25	24													
35	33,50	36,50	29													
40	38,50	41,50	34													
45	43,50	46,50	39													
50	48,50	51,50	44													
55	53,50	56,50	49													
60	58,50	61,50	54													
70	68,50	71,50	64													
80	78,50	81,50	74													


All sizes in mm

- Intermediate lengths at l_s are possible
- Threaded lengths between 4×d ≤ l_g ≤ l_{gmax} are possible

- 2) 10mm ≥ l_g ≤ 18mm ± 1,5mm
18mm ≥ l_g ≤ 30mm ± 1,7mm

fischer Power-Fast and Construction Screws	Annex A17
	of European Technical Assessment ETA-11/0027
Sizes and Material	

Appendix 31 / 41

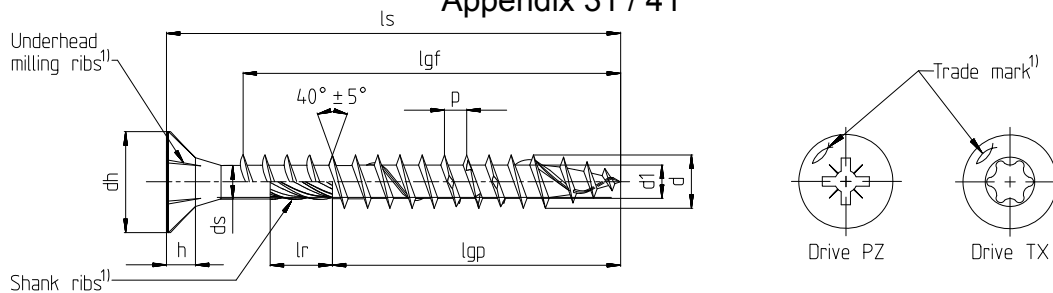

1) optional

Power-Fast wood construction screw - Countersunk head with full- or partial thread

- Stainless steel


Nominal diameter		6,0	8,0													
d	Outer diameter	6,00	8,00													
	Allow. deviation	±0,30														
d ₁	Core diameter	4,00	5,40													
	Allow. deviation	±0,20														
d _h	Head diameter	12,00	14,40													
	Allow. deviation	-0,50/+0,10	±0,40													
d _s	Shank diameter	4,30	5,90													
	Allow. deviation	-0,30/+0,10	±0,20													
h	Head height	3,80	5,10													
	Thread pitch	3,00-4,50	6,00													
p	Allow. deviation	±10%														
l _r ¹⁾	Shank rib length	7,00	13,00													
	Allow. deviation	±1,00	-2,00													
Drive TX		30	40													
Drive PZ		3	-													
Screw length l _s		Standard thread length l _{gf} = Full thread l _{gp} = Partial thread Tolerance: ± 2,0														
Nominal length	min	max	l _{gf}	l _{gp}	l _{gf}	l _{gp}										
60	58,50	61,50	50	36												
80	78,50	81,50	70	50	70	50										
90	88,25	91,75		60	80	50										
100	98,25	101,75		60	80	50										
120	118,25	121,75		70	100	75										
140	138,00	142,00		70		75										
160	158,00	162,00		70		75										
180	178,00	182,00		70		75										
in steps of 20mm																
200-300	l _s -2,00	l _s +2,00		70		100										
in steps of 20mm																
320-500	l _s -3,00	l _s +3,00				100										

All sizes in mm

- Intermediate lengths at l_s are possible
- Screws with partial thread > 50 mm length with shank ribs
- Threaded lengths between 4×d ≤ l_g ≤ l_{gmax} are possible

fischer Power-Fast and Construction Screws	Annex A18
	of European Technical Assessment ETA-11/0027
Sizes and Material	

Appendix 32 / 41

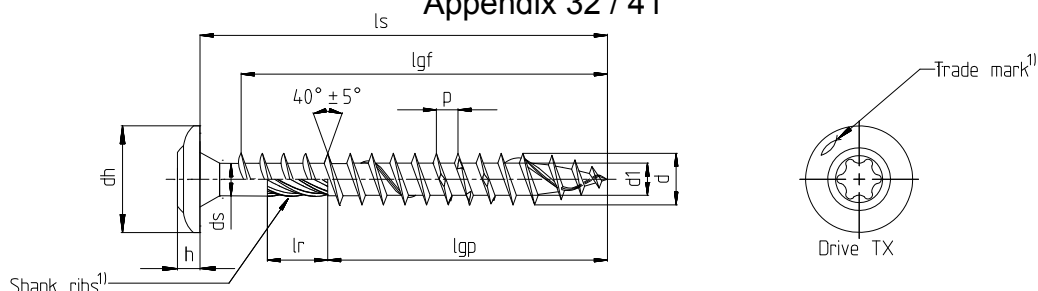

1) optional

Power-Fast wood construction screw - Flange head with full- or partial thread


- Stainless steel

Nominal diameter		6,0	8,0														
d	Outer diameter	6,00	8,00														
	Allow. deviation	$\pm 0,30$															
d ₁	Core diameter	4,00	5,40														
	Allow. deviation	$-0,30/+0,20$															
d _h	Head diameter	13,70	21,00														
	Allow. deviation	$-0,70/+1,30$	$\pm 1,00$														
d _s	Shank diameter	4,30	5,90														
	Allow. deviation	$-0,30/+0,10$															
h	Head height	3,50															
	Allow. deviation	$\pm 1,00$															
p	Thread pitch	3,00-4,50	6,00														
	Allow. deviation	$\pm 10\%$															
l _r ¹⁾	Shank rib length	8,00	13,00														
	Allow. deviation	$-2,00$															
Drive TX		30	40														
Screw length l_s				Standard thread length l_{gf} = Full thread l_{gp} = Partial thread Tolerance: $\pm 2,0$													
Nominal length	min	max	l_{gf}	l_{gp}	l_{gf}	l_{gp}											
60	58,50	61,50	50	36													
80	78,50	81,50	70	50	70	50											
90	88,25	91,75		60	80	50											
100	98,25	101,75		60	80	50											
120	118,25	121,75		70	100	75											
140	138,00	142,00		70		75											
160	158,00	162,00		70		75											
180	178,00	182,00		70		75											
in steps of 20mm																	
200-300	$l_s - 2,00$	$l_s + 2,00$		70		100											
in steps of 20mm																	
320-500	$l_s - 3,00$	$l_s + 3,00$				100											

All sizes in mm

- Intermediate lengths at l_s are possible
- Threaded lengths between $4 \times d \leq l_g \leq l_{gmax}$ are possible

fischer Power-Fast and Construction Screws	Annex A19
	of European Technical Assessment ETA-11/0027
Sizes and Material	

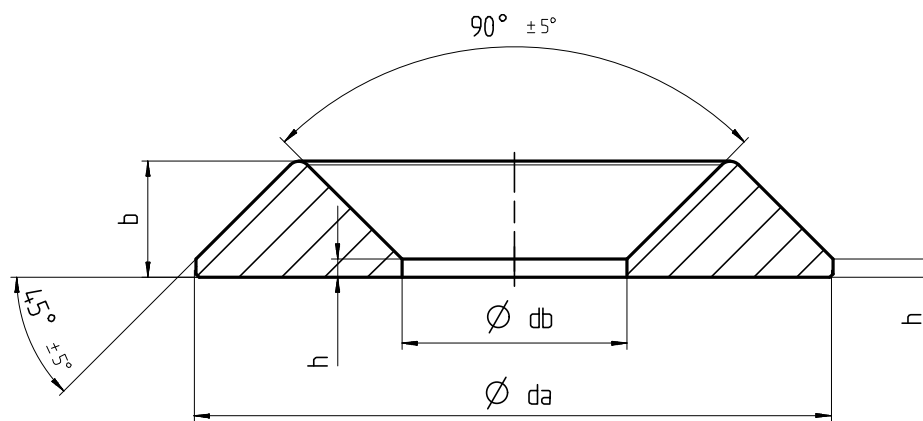


Washer for Power-Fast and construction screws

- Carbon Steel - possible surface treatments: yellow or blue zinc-plated, bonus- zined, $\geq 12\mu\text{m}$ blue zinc-plated - Stainless steel								
Nominal diameter		Type 1				Type 2		
Size		6	8	10	12	6	8	10
db	Inner diameter	6,70	8,70	11,20	6,70	6,70	8,70	11,20
	Allow. deviation	-0,40						
da	Outer diameter	21	30	35	43	21	25,50	30,50
	Allow. deviation	$\pm 2,0$						
b	Height	4,70	5,20	6,20	8,30	4,70	5,20	6,20
	Allow. deviation	-0,40						
h	Height	1,50	1,80	2,00	2,20	1,50	1,80	2,00
	Allow. deviation	-0,15						

All sizes in mm

fischer Power-Fast and Construction Screws	Annex A20
	of European Technical Assessment ETA-11/0027
Accessories	


Appendix 34 / 41
Annex B1
Fixing of on-roof insulation system

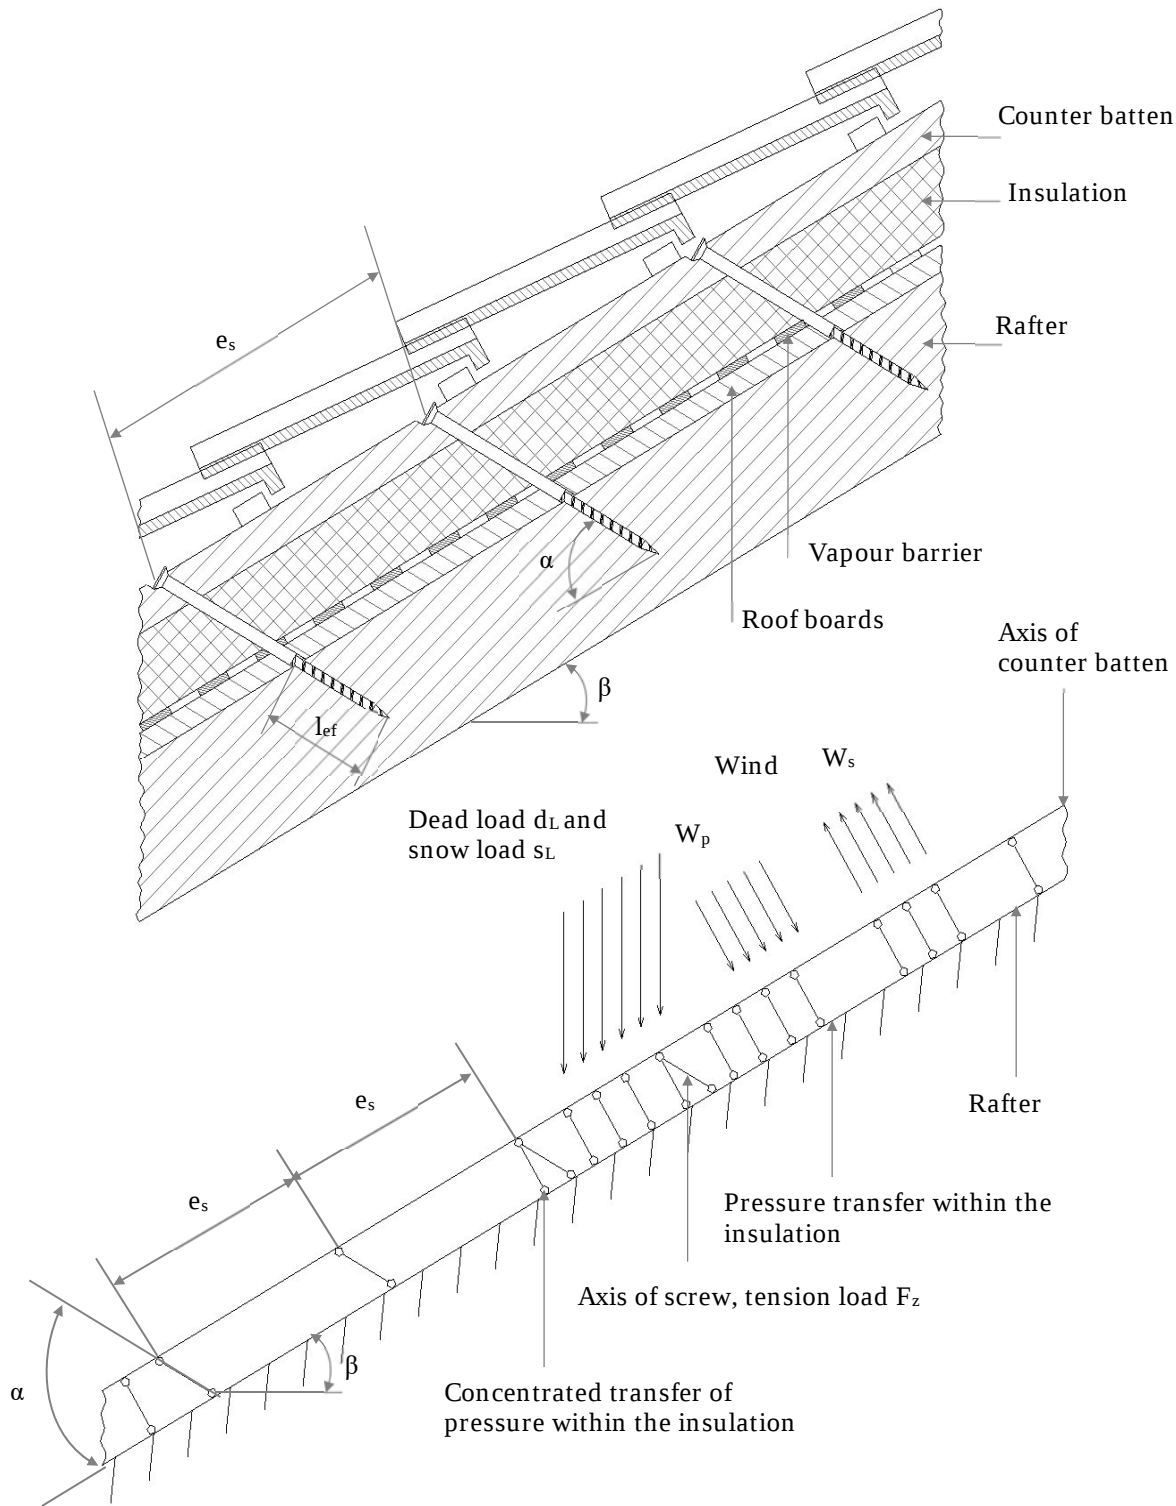

W_s	=	Wind suction	W_p	=	Wind pressure
e_s	=	Spacing of screws	l_{ef}	=	Thread part part of screw in rafter
β	=	Roof inclination	α	=	Angle between axis of screw and axis of rafter

fischer Power-Fast and Construction Screws	Annex B1
Accessories	of European Technical Assessment ETA-11/0027

Annex B2
Fixing of on-roof insulation system
Point loads F_b perpendicular to the battens

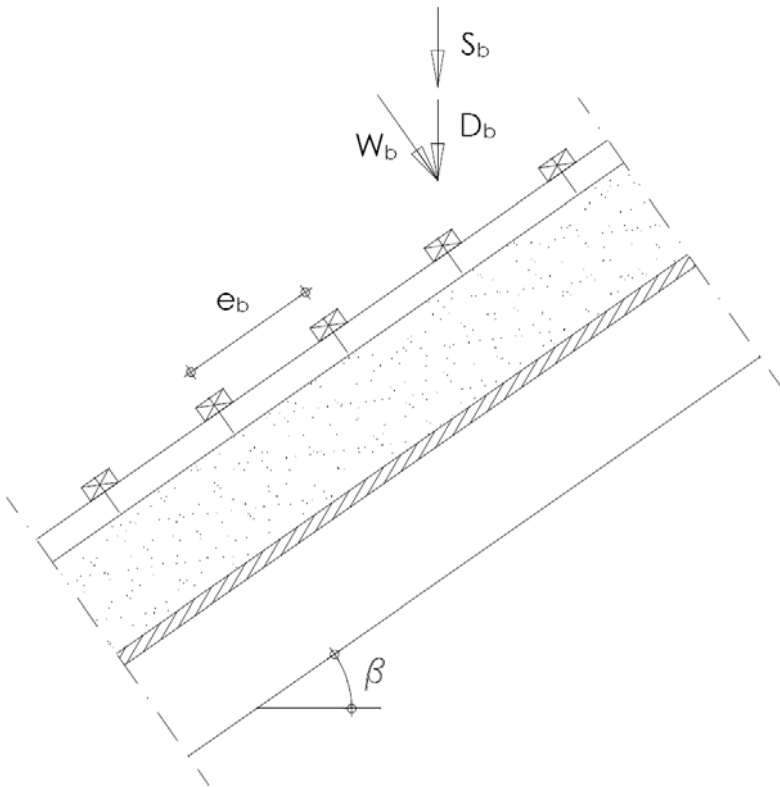


$$\begin{aligned} D_b &= d \cdot e_b \cdot e_r \\ S_b &= s \cdot e_b \cdot e_r \cdot \cos \beta \\ W_b &= w_p \cdot e_b \cdot e_r \\ F_b &= W_b + (D_b + S_b) \cdot \cos \beta \end{aligned}$$

where

D_b = point load by dead load
 S_b = point load by snow load
 W_b = point load perpendicular to the batten by wind load (pressure)
 e_b = distance of the battens
 e_r = distance of the rafters
 s = snow load per m^2 ground area
 w_p = wind pressure on the roof area
 d = dead load per m^2 roof area
 β = roof angle

fischer Power-Fast and Construction Screws	Annex B2 of European Technical Assessment ETA-11/0027
Accessories	

Point loads F_s perpendicular to the battens by screws

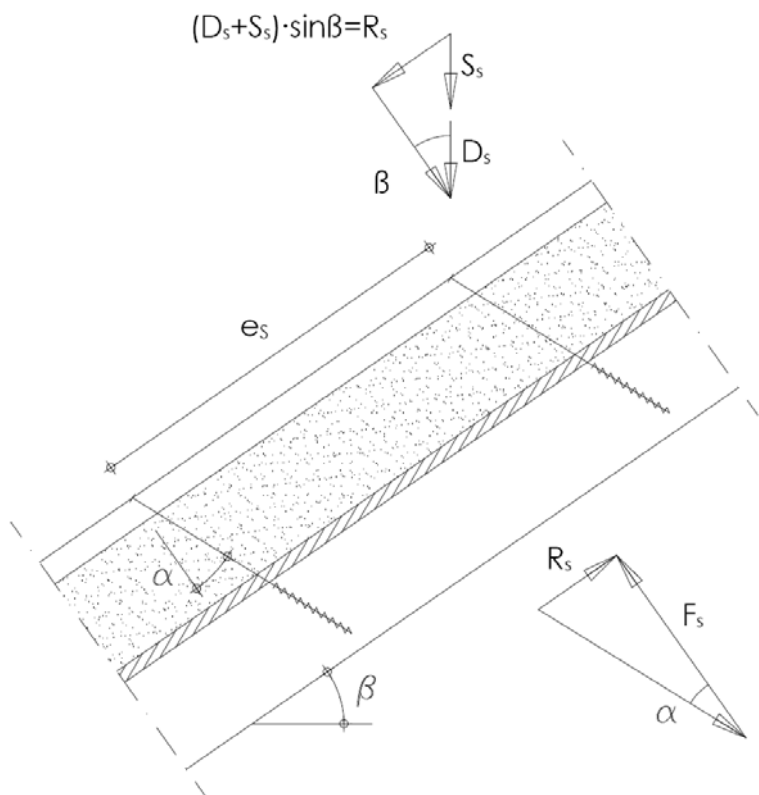

$$D_s = d \cdot e_s \cdot e_r$$

$$S_s = s \cdot e_s \cdot e_r \cdot \cos \beta$$

$$R_s = (D_s + S_s) \cdot \sin \beta$$

$$F_s = R_s / \tan \alpha$$

where

D_s = point load by dead load

S_s = point load by snow load

R_s = shear load of the roof by dead load and snow load

e_s = distance of the screws

e_r = distance of the rafters

α = angle between screw axis and perpendicular to rafter axis

fischer Power-Fast and Construction Screws	Annex B2 of European Technical Assessment ETA-11/0027
Accessories	

Appendix 37 / 41

Design of the battens

The bending stresses are calculated as:

$$M = \frac{(F_b + F_s) \cdot \ell_{\text{char}}}{4}$$

Where

$$\ell_{\text{char}} = \text{characteristic length } \ell_{\text{char}} = \sqrt[4]{\frac{4 \cdot EI}{w_{\text{ef}} \cdot K}}$$

EI = bending stiffness of the batten

K = coefficient of subgrade

w_{ef} = effective width of the heat insulation

F_b = Point loads perpendicular to the battens

F_s = Point loads perpendicular to the battens, load application in the area of the screw heads

The coefficient of subgrade K may be calculated from the modulus of elasticity E_{HI} and the thickness t_{HI} of the heat insulation if the effective width w_{ef} of the heat insulation under compression is known. Due to the load extension in the heat insulation the effective width w_{ef} is greater than the width of the batten or rafter, respectively. For further calculations, the effective width w_{ef} of the heat insulation may be determined according to:

$$w_{\text{ef}} = w + t_{\text{HI}} / 2$$

where

w = minimum width of the batten or rafter, respectively

t_{HI} = thickness of the heat insulation

$$K = \frac{E_{\text{HI}}}{t_{\text{HI}}}$$

The following condition shall be satisfied:

$$\frac{\sigma_{\text{m,d}}}{f_{\text{m,d}}} = \frac{M_{\text{d}}}{W \cdot f_{\text{m,d}}} \leq 1$$

For the calculation of the section modulus W the net cross section has to be considered.

The shear stresses shall be calculated according to:

$$V = \frac{(F_b + F_s)}{2}$$

The following condition shall be satisfied:

$$\frac{\tau_{\text{d}}}{f_{\text{v,d}}} = \frac{1,5 \cdot V_{\text{d}}}{A \cdot f_{\text{v,d}}} \leq 1$$

For the calculation of the cross section area the net cross section has to be considered.

Design of the heat insulation

The compressive stresses in the heat insulation shall be calculated according to:

$$\sigma = \frac{1,5 \cdot F_b + F_s}{2 \cdot \ell_{\text{char}} \cdot w}$$

The design value of the compressive stress shall not be greater than 110 % of the compressive stress at 10 % deformation calculated according to EN 826.

fischer Power-Fast and Construction Screws	Annex B2
Accessories	of European Technical Assessment ETA-11/0027

Appendix 38 / 41

Design of the screws

The screws are loaded predominantly axially. The axial tension force in the screw may be calculated from the shear loads of the roof R_s :

$$T_s = \frac{R_s}{\cos \alpha}$$

The load-carrying capacity of axially loaded screws is the minimum design value of the axial withdrawal capacity of the threaded part of the screw, the head pull-through capacity of the screw and the tensile capacity of the screw.

In order to limit the deformation of the screw head for heat insulation thicknesses over 200 mm or with compressive strength below 0,12 N/mm², respectively, the axial withdrawal capacity of the screws shall be reduced by the factors k_1 and k_2 :

$$F_{ax,\alpha,Rd} = \min \left\{ \begin{array}{l} k_{ax} \cdot f_{ax,d} \cdot d \cdot \ell_{ef} \cdot k_1 \cdot k_2 \left(\frac{\rho_k}{350} \right)^{0,8} \\ f_{head,d} \cdot d_h^2 \cdot \left(\frac{\rho_k}{350} \right)^{0,8} \end{array} \right.$$

where:

$f_{ax,d}$	design value of the axial withdrawal parameter of the threaded part of the screw
d	outer thread diameter of the screw
ℓ_{ef}	Point side penetration length of the threaded part of the screw in the rafter, $\ell_{ef} \geq 40$ mm
α	Angle between grain and screw axis ($\alpha \geq 30^\circ$)
ρ_k	characteristic density of the wood-based member [kg/m ³]
$f_{head,d}$	design value of the head pull-through capacity of the screw
d_h	head diameter
k_1	$\min \{1; 200/t_{HI}\}$
k_2	$\min \{1; \sigma_{10\%}/0,12\}$
t_{HI}	thickness of the heat insulation [mm]
$\sigma_{10\%}$	compressive stress of the heat insulation under 10 % deformation [N/mm ²]

If equation k_1 and k_2 are considered, the deflection of the battens does not need to be considered. Alternatively to the battens, panels with a minimum thickness of 20 mm from plywood according to EN 636 or an ETA or national provisions that apply at the installation site, particle board according to EN 312 or an ETA or national provisions that apply at the installation site, oriented strand board according to EN 300 or an ETA or national provisions that apply at the installation site and solid wood panels according to EN 13353 or an ETA or national provisions that apply at the installation site or cross laminated timber according to an ETA may be used.

fischer Power-Fast and Construction Screws	Annex B2
Accessories	of European Technical Assessment ETA-11/0027

Appendix 39 / 41

Thermal insulation material on rafters with parallel screws perpendicular to the roof plane

Alternatively to the battens, panels with a minimum thickness of 20 mm from plywood according to EN 636, particleboard according to EN 312, oriented strand board OSB/3 and OSB/4 according to EN 300 or European Technical Approval and solid wood panels according to EN 13353 may be used.

Characteristic load-carrying capacity of a screw loaded in shear:

$$F_{v,Rk} = \min \left\{ \begin{array}{l} f_{h,b,k} \cdot d \cdot t_b \\ f_{h,r,k} \cdot d \cdot t_r \\ \frac{f_{h,b,k} \cdot d \cdot \beta}{1 + \beta} \cdot \left(\sqrt{4t_{il}^2 + (2 + \frac{1}{\beta})t_b^2 + (2 + \beta)t_r^2 + 4t_{il}(t_b + t_r) + 2t_b t_r - 2t_{il} - t_b - t_r} \right) + \frac{F_{ax,Rk}}{4} \\ 1,05 \cdot \frac{f_{h,b,k} \cdot d \cdot \beta}{\frac{1}{2} + \beta} \left(\sqrt{t_{il}^2 + t_{il}t_b + \frac{t_b^2}{2} \left(1 + \frac{1}{\beta} \right) + \frac{M_{y,k}}{f_{h,b,k}d} \left(1 + \frac{2}{\beta} \right) - t_{il} - \frac{t_b}{2}} \right) + \frac{F_{ax,Rk}}{4} \\ 1,05 \cdot \frac{f_{h,b,k} \cdot d \cdot \beta}{\frac{1}{2} + \beta} \left(\sqrt{t_{il}^2 + t_{il}t_r + \frac{t_r^2}{2} (1 + \beta) + \frac{M_{y,k}}{f_{h,b,k}d} \left(2 + \frac{1}{\beta} \right) - t_{il} - \frac{t_r}{2}} \right) + \frac{F_{ax,Rk}}{4} \\ 1,15 \cdot \frac{f_{h,b,k} \cdot d}{1 + \beta} \left(\sqrt{\beta^2 t_{il}^2 + 4\beta(\beta + 1) \cdot \frac{M_{y,k}}{f_{h,b,k}d} - \beta t_{il}} \right) + \frac{F_{ax,Rk}}{4} \end{array} \right.$$

Where:

$f_{h,b,k}$	Characteristic batten embedding strength [N/mm ²]
$f_{h,r,k}$	Characteristic rafter embedding strength [N/mm ²]
β	$f_{h,r,k}/f_{h,b,k}$
d	Outer thread diameter [mm]
t_b	Batten thickness [mm]
t_r	The lower value of rafter thickness or screw penetration length [mm]
t_{il}	Interlayer thickness [mm]
$M_{y,k}$	Characteristic fastener yield moment [Nmm]
$F_{ax,Rk}$	Characteristic axial tensile capacity of the screw [N]

fischer Power-Fast and Construction Screws	Annex B2
Accessories	of European Technical Assessment ETA-11/0027


Appendix 40 / 41

Annex C


Minimum distances and spacing

Axially or laterally loaded screws in the plane surface or edge surface of cross laminated timber

Definition of spacing, end and edge distances in the plane surface unless otherwise specified in the technical specification (ETA or hEN) for the cross laminated timber:

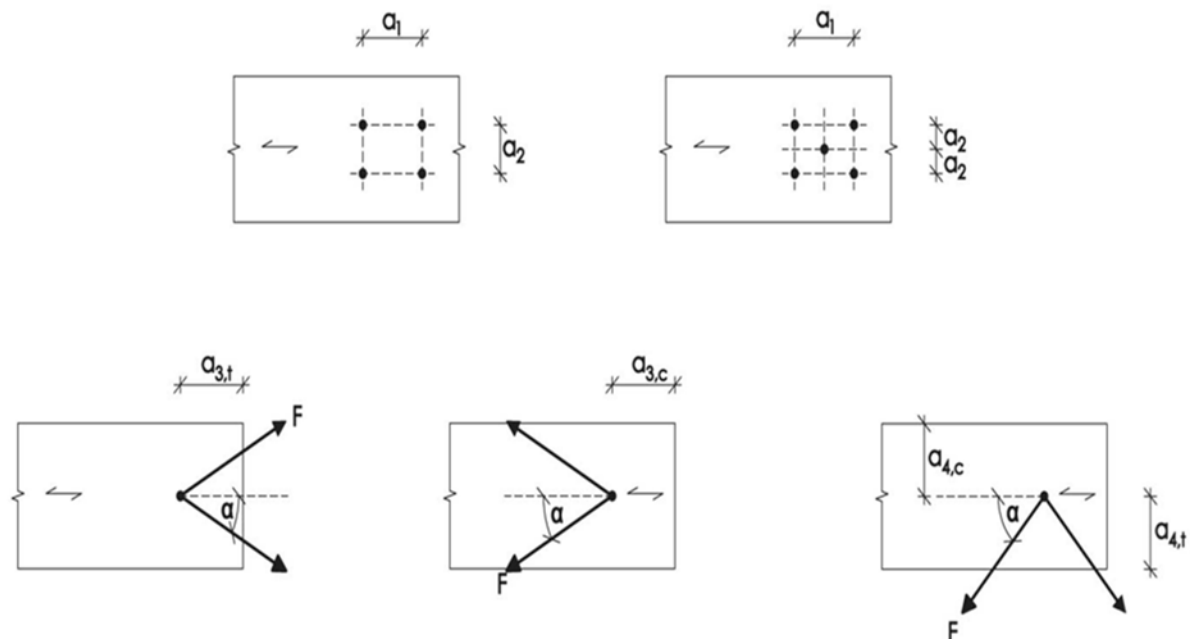

Definition of spacing, end and edge distances in the edge surface unless otherwise specified in the technical specification (ETA or hEN) for the cross laminated timber.

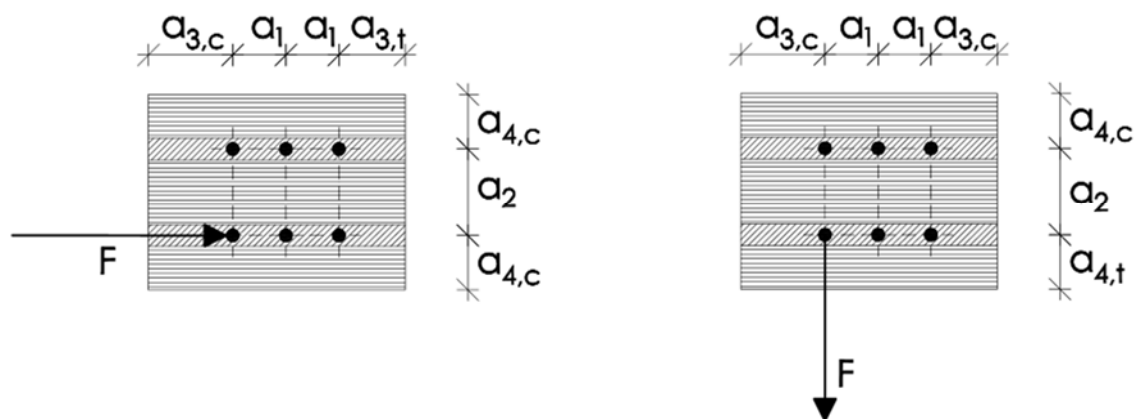

For screws in the edge surface, a_1 and a_3 are parallel to the CLT plane surface, a_2 and a_4 perpendicular to CLT plane surface.

Table C1: Minimum spacing, end and edge distances of screws in the plane or edge surfaces of cross laminated timber


	a_1	$a_{3,t}$	$a_{3,c}$	a_2	$a_{4,t}$	$a_{4,c}$
Plane surface (see Figure 1)	$4 \cdot d$	$6 \cdot d$	$6 \cdot d$	$2,5 \cdot d$	$6 \cdot d$	$2,5 \cdot d$
Edge surface (see Figure 2)	$10 \cdot d$	$12 \cdot d$	$7 \cdot d$	$4 \cdot d$	$6 \cdot d$	$3 \cdot d$

fischer Power-Fast and Construction Screws	Annex C
Minimum distances and spacings	of European Technical Assessment ETA-11/0027

Appendix 41 / 41

Annex D**Visualisation of the Power-Fast screw head clamped between two metal plates**

Metric screws with hexagon head, countersunk head or cylindric head or threaded rods with nut and washer – each according to the structural requirements – at least 2xM8 (≥ 4.6 respectively A2-50) for the connection of the two plates made of aluminium (mechanical properties at least like e.g. EN AW 6082, EN AW 5083, EN AW 6060 or EN AC-44100); made of carbon steel or made of stainless steel (each at least S235).

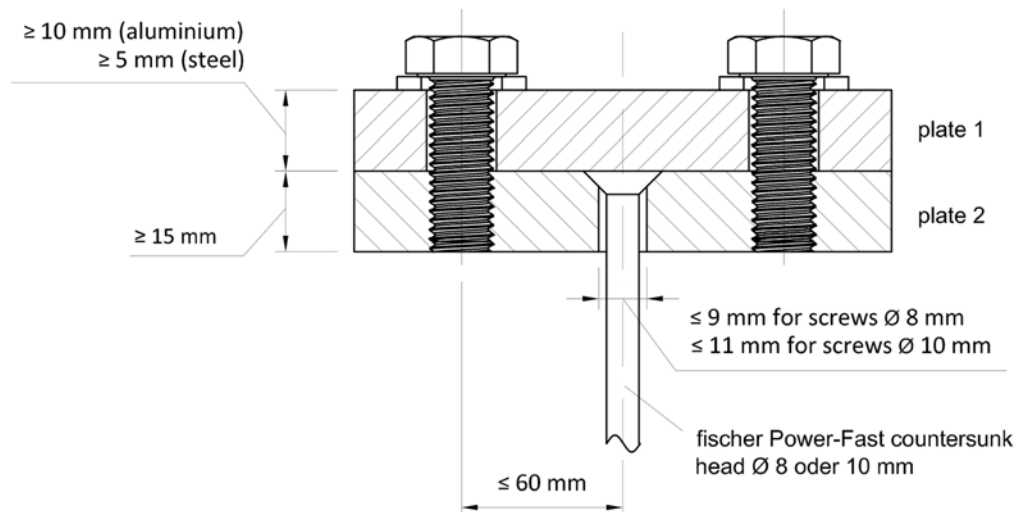

Information for the structural analysis of the metric screw connection and the metal plates are not part of this European Technical Assessment.

(Fig. not to scale)

fischer Power-Fast and Construction Screws	Annex D
clamping of the screw head for compression impact	of European Technical Assessment ETA-11/0027



LEISTUNGSERKLÄRUNG



Nr. 0045 – DE

1. Eindeutiger Kenncode des Produkttyps: **fischer Power-Fast screws and fischer construction screws**

2. Verwendungszweck(e):

Produkt	Verwendungszweck (e)
Schrauben zur Verwendung in Holzkonstruktionen	Schrauben zur Verwendung in tragenden Holzkonstruktionen, oder für Befestigung von Aufdachdämmsystemen auf Sparren, siehe Anhang.

3. Hersteller: **fischerwerke GmbH & Co. KG, Klaus-Fischer-Straße 1, 72178 Waldachtal, Deutschland**

4. Bevollmächtigter: --

5. System(e) zur Bewertung und Überprüfung der Leistungsbeständigkeit: 3

6a. Harmonisierte Norm: ---

Notifizierte Stelle(n): ---

6b. Europäisches Bewertungsdokument: **EAD 130118-00-0603**

Europäische Technische Bewertung: **ETA-11/0027; 2016-10-26**

Technische Bewertungsstelle: **ETA-Danmark A/S**

Notifizierte Stelle(n): **1343 – MPA Darmstadt**

7. Erklärte Leistung(en):

Mechanische Festigkeit und Standsicherheit (BWR 1)

Wesentliches Merkmal	Leistung
Zugfestigkeit	Siehe Anhang, insbesondere Anhang Seite 5
Einschraubmoment	Siehe Anhang, insbesondere Anhang Seite 5
Torsionsfestigkeit	Siehe Anhang, insbesondere Anhang Seite 5

Brandschutz (BWR 2)

Wesentliches Merkmal	Leistung
Brandverhalten	Der Dübel erfüllt die Anforderungen der Klasse A 1

8. Angemessene Technische Dokumentation und/oder Spezifische Technische Dokumentation: ---

Die Leistung des vorstehenden Produkts entspricht der erklärten Leistung/den erklärten Leistungen. Für die Erstellung der Leistungserklärung im Einklang mit der Verordnung (EU) Nr. 305/2011 ist allein der obengenannte Hersteller verantwortlich.

Unterzeichnet für den Hersteller und im Namen des Herstellers von:

Andreas Bucher, Dipl.-Ing.

Wolfgang Hengesbach, Dipl.-Ing., Dipl.-Wirtsch.-Ing.

i.V. A. Bucher

i.V. W. Hengesbach

Tumlingen, 2016-11-03

- Diese Leistungserklärung wurde in verschiedenen Sprachversionen erstellt. Für den Fall unterschiedlicher Auslegung hat immer die englische Version Vorrang.

- Der Anhang enthält freiwillige und ergänzende Informationen in englischer Sprache. Diese gehen über die (sprachneutral angegebenen) gesetzlichen Anforderungen hinaus.

II SPECIFIC PART OF THE EUROPEAN TECHNICAL ASSESSMENT

1 Technical description of product and intended use

Technical description of the product

“fischer Power-Fast” and “fischer construction screws” are self-tapping screws to be used in timber structures. “fischer Power-Fast” screws shall be threaded over a part or over the full length. “fischer construction screws” shall be threaded over a part of the length. The screws shall be produced from carbon steel wire for nominal diameters of 3,0 mm to 12,0 mm and from stainless steel wire for nominal diameters of 3,0 mm to 8,0 mm. The material specification of the stainless steel screws is deposited with ETA-Danmark. Where corrosion protection is required, the material or coating shall be declared in accordance with the relevant specification given in Annex A of EN 14592.

Geometry and Material

The nominal diameter (outer thread diameter), d , shall not be less than 3,0 mm and shall not be greater than 12,0 mm. The overall length, L , of screws shall not be less than 20 mm and shall not be greater than 600 mm. Other dimensions are given in Annex A1 to Annex A18.

The ratio of inner thread diameter to outer thread diameter d_i/d ranges from 0,59 to 0,69.

The screws are threaded over a minimum length ℓ_g of $4,0 \cdot d$ (i.e. $\ell_g \geq 4,0 \cdot d$).

The lead p (distance between two adjacent thread flanks) ranges from $0,50 \cdot d$ to $0,67 \cdot d$.

No breaking of screws shall be observed at a bend angle, α , of less than $(45/d^{0,7} + 20)$ degrees.

The material specification of the of the stainless steel screws is deposited with ETA-Danmark.

2 Specification of the intended use in accordance with the applicable EAD

The screws are used for connections in load bearing timber structures between members of solid timber (softwood and hardwood). Furthermore, all kinds of processed timber products (all softwood and hardwood as well), such as glued laminated timber, cross-laminated timber, laminated veneer lumber, similar glued members, wood-based panels or steel.

Furthermore “fischer Power-Fast” screws with diameter of 6 mm, 8 mm, 10 mm and 12 mm may also be used for the fixing of heat insulation on rafters and on vertical facades.

Steel plates and wood-based panels except solid wood panels and cross laminated timber shall only be located on the side of the screw head. The following wood-based panels may be used:

- Plywood according to EN 636 or ETA
- Particleboard according to EN 312 or ETA
- Oriented Strand Board, Type OSB/3 and OSB/4 according to EN 300 or ETA
- Fibreboard according to EN 622-2 and 622-3 or ETA (minimum density 650 kg/m³)
- Cement bonded particleboard according to ETA
- Solid wood panels according to EN 13353 and EN 13986, and cross laminated timber according to ETA
- Laminated Veneer Lumber according to EN 14374 or ETA
- Engineered wood products according to ETA if the ETA of the product includes provisions for the use of self-tapping screws, the provisions of the ETA of the engineered wood product apply

The screws shall be screwed into softwood without pre-drilling or after pre-drilling with a diameter not larger than the inner thread diameter for the length of the threaded part and with a maximum of the smooth shank diameter for the length of the smooth shank. The screws shall be driven into hardwood after pre-drilling with a suitable diameter according to section 3.11.

The screws are intended to be used in timber connections for which requirements for mechanical resistance and stability and safety in use in the sense of the Basic Works Requirements 1 and 4 of Regulation 305/2011 shall be fulfilled.

Form and dimensions of washers are given in Annex A19. Washers must be made of steel.

The design of the connections shall be based on the characteristic load-carrying capacities of the screws. The design capacities shall be derived from the characteristic capacities in accordance with Eurocode 5 or an appropriate national code (e.g. DIN 1052:2008-12). Regarding environmental conditions, national provisions at the building site shall apply.

The screws are intended for use for connections subject to static or quasi static loading.

The zinc-coated screws are for use in timber structures subject to the dry, internal conditions defined by the

service classes 1 and 2 of EN 1995-1-1:2008 (Eurocode 5).

The screws made of stainless steel meet the requirements of Eurocode 5 (EN 1995-1-1:2008), for use in structures subject to the wet conditions defined as service class 3.

The scope of the screws regarding resistance to corrosion shall be defined according to national provisions that apply at the installation site considering environmental conditions.

The provisions made in this European Technical Assessment are based on an assumed intended working life of the screws of 50 years.

The indications given on the working life cannot be interpreted as a guarantee given by the producer or Assessment Body, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

Characteristic	Assessment of characteristic
3.1 Mechanical resistance and stability*) (BWR1)	
Tensile strength	Characteristic value $f_{\text{tens},k}$:
Screws made from carbon steel	Screw d = 3,0 mm: 2,7 kN Screw d = 3,5 mm: 3,7 kN Screw d = 4,0 mm: 4,8 kN Screw d = 4,5 mm: 6,0 kN Screw d = 5,0 mm: 7,5 kN Screw d = 6,0 mm: 10,7 kN Screw d = 8,0 mm: 19,1 kN Screw d = 10,0 mm: 29,8 kN Screw d = 12,0 mm: 32,7 kN
Screws from stainless steel	Screw d = 3,0 mm: 1,6 kN Screw d = 3,5 mm: 2,1 kN Screw d = 4,0 mm: 2,8 kN Screw d = 4,5 mm: 3,5 kN Screw d = 5,0 mm: 4,3 kN Screw d = 6,0 mm: 6,2 kN Screw d = 8,0 mm: 13,0 kN
Insertion moment	Ratio of the characteristic torsional strength to the mean insertion moment: $f_{\text{tor},k} / R_{\text{tor,mean}} \geq 1,5$
Torsional strength	Characteristic value $f_{\text{tor},k}$:
Screws from carbon steel	Screw d = 3,0 mm: 1,3 Nm Screw d = 3,5 mm: 2,0 Nm Screw d = 4,0 mm: 3,0 Nm Screw d = 4,5 mm: 4,3 Nm Screw d = 5,0 mm: 6,0 Nm Screw d = 6,0 mm: 9,5 Nm Screw d = 8,0 mm: 25,0 Nm Screw d = 10,0 mm: 40,0 Nm Screw d = 12,0 mm: 55,0 Nm
Screws from stainless steel	Screw d = 3,0 mm: 0,9 Nm Screw d = 3,5 mm: 1,3 Nm Screw d = 4,0 mm: 1,9 Nm Screw d = 4,5 mm: 2,6 Nm Screw d = 5,0 mm: 3,7 Nm Screw d = 6,0 mm: 6,5 Nm Screw d = 8,0 mm: 16,0 Nm
3.2 Safety in case of fire (BWR2)	
Reaction to fire	The screws are made from steel classified as Euroclass A1 in accordance with EN 13501-1 and Commission Delegated Regulation 2016/364.

Characteristic	Assessment of characteristic
3.3 Hygiene, health and the environment (BWR3)	
Influence on air quality	The product does not contain/release dangerous substances specified in TR 034, dated October 2015 **)
3.7 Sustainable use of natural resources (BR7)	No Performance Assessed
3.8 General aspects related to the performance of the product	The screws have been assessed as having satisfactory durability and serviceability when used in timber structures using the timber species described in Eurocode 5 and subject to the conditions defined by service classes 1, 2 and 3
Identification	See Annex A

*) See additional information in section 3.9 – 3.12.

**) In addition to the specific clauses relating to dangerous substances contained in this European technical Assessment, there may be other requirements applicable to the products falling within its scope (e.g. transposed European legislation and national laws, regulations and administrative provisions). In order to meet the provisions of the Construction Products Regulation, these requirements need also to be complied with, when and where they apply.

3.9 Mechanical resistance and stability

The load-carrying capacities for “fischer Power-Fast” and “fischer construction screws” are applicable to the wood-based materials mentioned in paragraph 1 even though the term timber has been used in the following.

The characteristic lateral load-carrying capacities and the characteristic axial withdrawal capacities of “fischer Power-Fast” and “fischer construction screws” screws should be used for designs in accordance with Eurocode 5 or an appropriate national code.

Pointside penetration length of the threaded part must be $\ell_{ef} \geq 4 \cdot d$, where d is the outer thread diameter of the screw. For the fixing of rafters, point side penetration must be at least 40 mm, $\ell_{ef} \geq 40$ mm.

ETA's for structural members may be considered if applicable.

For wood-based panels the relevant ETAs must be considered where applicable.

Lateral load-carrying capacity

The characteristic lateral load-carrying capacity of “fischer Power-Fast” and “fischer construction screws” screws shall be calculated according to EN 1995-1-1:2008 (Eurocode 5) using the outer thread diameter d as the nominal diameter of the screw. The contribution from the rope effect may be considered.

The characteristic yield moment shall be calculated from:

Screws from carbon steel for $3,0 \text{ mm} \leq d \leq 5,0 \text{ mm}$ and $12,0 \text{ mm}$:

$$M_{y,k} = 0,15 \cdot 500 \text{ (N/mm}^2\text{)} \cdot d^{2,6} \quad [\text{Nmm}]$$

Screws from carbon steel for $6,0 \text{ mm} \leq d \leq 10,0 \text{ mm}$:

$$M_{y,k} = 0,15 \cdot 600 \text{ (N/mm}^2\text{)} \cdot d^{2,6} \quad [\text{Nmm}]$$

Screws from stainless steel for $3,0 \text{ mm} < d < 6,0 \text{ mm}$:

$$M_{y,k} = 0,15 \cdot 350 \text{ (N/mm}^2\text{)} \cdot d^{2,6} \quad [\text{Nmm}]$$

Screws from stainless steel for $d = 8,0 \text{ mm}$:

$$M_{y,k} = 0,15 \cdot 400 \text{ (N/mm}^2\text{)} \cdot d^{2,6} \quad [\text{Nmm}]$$

where

d outer thread diameter [mm]

The embedding strength for screws in non-pre-drilled holes arranged at an angle between screw axis and grain direction, $0^\circ \leq \alpha \leq 90^\circ$ is:

$$f_{h,k} = \frac{0,082 \cdot \rho_k \cdot d^{-0,3}}{2,5 \cdot \cos^2 \alpha + \sin^2 \alpha} \quad [\text{N/mm}^2]$$

and accordingly for screws in pre-drilled holes:

$$f_{h,k} = \frac{0,082 \cdot \rho_k \cdot (1 - 0,01 \cdot d)}{2,5 \cdot \cos^2 \alpha + \sin^2 \alpha} \quad [\text{N/mm}^2]$$

Where

ρ_k characteristic timber density [kg/m^3];

d outer thread diameter [mm];

α angle between screw axis and grain direction.

The embedding strength for screws arranged parallel to the plane of cross laminated timber, independent of the angle between screw axis and grain direction, $0^\circ \leq \alpha \leq 90^\circ$, may be calculated from:

$$f_{h,k} = 20 \cdot d^{-0,5} \quad [\text{N/mm}^2]$$

Where

d outer thread diameter [mm]

The embedding strength for screws in the wide face of cross laminated timber should be assumed as for solid timber based on the characteristic density of the outer layer. If relevant, the angle between force and grain direction of the outer layer should be taken into account.

The direction of the lateral force shall be perpendicular to the screw axis and parallel to the wide face of the cross laminated timber.

Axial withdrawal capacity

The characteristic axial withdrawal capacity of „fischer Power-Fast” and “fischer construction screws” in solid timber (softwood and ash, beech or oak hardwood), glued laminated timber (softwood and hardwood, ash, beech or oak), laminated veneer lumber (softwood or hardwood beech) or cross-laminated timber members at an angle of $0^\circ \leq \alpha \leq 90^\circ$ to the grain shall be calculated from:

$$F_{ax,\alpha,Rk} = n_{ef} \cdot k_{ax} \cdot f_{ax,k} \cdot d \cdot \ell_{ef} \cdot \left(\frac{\rho_k}{350} \right)^{0,8} \quad [\text{N}]$$

Where

$F_{ax,\alpha,Rk}$ Characteristic withdrawal capacity of the connection at an angle α to the grain [N]

n_{ef} Effective number of screws according to EN 1995-1-1

For inclined screws: $n_{ef} = \max \{ n^{0,9}; 0,9 \cdot n \}$

k_{ax} Factor, taking into account the angle α between screw axis and grain direction

$k_{ax} = 1,0$ for $45^\circ \leq \alpha < 90^\circ$

$k_{ax} = 0,3 + \frac{0,7 \cdot \alpha}{45}$ for $0^\circ \leq \alpha < 45^\circ$

$f_{ax,k}$	Characteristic withdrawal parameter [N/mm ²]
screw d = 3,0 mm:	$f_{ax,k} = 13,8 \text{ N/mm}^2$
screw d = 3,5 mm:	$f_{ax,k} = 13,4 \text{ N/mm}^2$
screw d = 4,0 mm:	$f_{ax,k} = 13,0 \text{ N/mm}^2$
screw d = 4,5 mm:	$f_{ax,k} = 12,6 \text{ N/mm}^2$
screw d = 5,0 mm:	$f_{ax,k} = 12,2 \text{ N/mm}^2$
screw d = 6,0 mm:	$f_{ax,k} = 11,6 \text{ N/mm}^2$
screw d ≥ 8,0 mm:	$f_{ax,k} = 10,0 \text{ N/mm}^2$
d	Outer thread diameter [mm]
ℓ_{ef}	Point side penetration length of the threaded part according to EN 1995-1-1:2008 [mm]
α	Angle between grain and screw axis [°]
ρ_k	Characteristic density [kg/m ³], for hardwoods the assumed characteristic density shall not exceed 730 kg/m ³

For screws arranged under an angle between screw axis and grain direction of less than 90°, the minimum threaded penetration length is:

$$\ell_{ef} \geq \min(4 \cdot d / \sin \alpha ; 20 \cdot d)$$

For screws penetrating more than one layer of cross laminated timber, the different layers may be taken into account proportionally.

The axial withdrawal capacity is limited by the head pull-through capacity and the tensile strength of the screw.

For axially loaded screws in tension, where the external force is parallel to the screw axes, the rules in EN 1995-1-1, 8.7.2 (8) should be applied.

For inclined screws in timber-to-timber or steel-to-timber shear connections, where the screws are arranged under an angle $30^\circ \leq \alpha \leq 60^\circ$ between the shear plane and the screw axis, the effective number of screws n_{ef} should be determined as follows:

For one row of n screws parallel to the load, the load-carrying capacity should be calculated using the effective number of fasteners n_{ef} , where

$$n_{ef} = \max \left\{ n^{0,9} ; 0,9 \cdot n \right\}$$

and n is the number of inclined screws in a row. If crossed pairs of screws are used in timber-to-timber connections, n is the number of crossed pairs of screws in a row.

Note: For inclined screws as fasteners in mechanically jointed beams or columns or for the fixing of thermal insulation material, $n_{ef} = n$.

Head pull-through capacity

The characteristic head pull-through capacity of “fischer Power-Fast” and “fischer construction screws” shall be calculated according to EN 1995-1-1:2008 from:

$$F_{ax,\alpha,Rk} = n_{ef} \cdot f_{head,k} \cdot d_h^2 \cdot \left(\frac{\rho_k}{350} \right)^{0,8} \quad [N]$$

where:

$F_{ax,\alpha,Rk}$	characteristic head pull-through capacity of the connection at an angle $\alpha \geq 30^\circ$ to the grain [N]
n_{ef}	effective number of screws according to EN 1995-1-1 For inclined screws: $n_{ef} = \max \left\{ n^{0,9} ; 0,9 \cdot n \right\}$ (see axial withdrawal capacity)
$f_{head,k}$	characteristic head pull-through parameter [N/mm ²]
d_h	diameter of the screw head [mm]
ρ_k	characteristic density [kg/m ³], for wood-based panels $\rho_k = 380 \text{ kg/m}^3$

Characteristic head pull-through parameter for screws with head diameter $\leq 21 \text{ mm}$ in connections with timber and with wood-based panels with thicknesses above 20 mm:

$$f_{head,k} = 12 \text{ N/mm}^2$$

Characteristic head pull-through parameter for screws with head diameter $21 \text{ mm} < d_h \leq 35 \text{ mm}$ in connections with timber and with wood-based panels with thicknesses above 20 mm:

$$f_{head,k} = 10 \text{ N/mm}^2$$

Characteristic head pull-through parameter for screws in connections with wood-based panels with thicknesses between 12 mm and 20 mm:

$$f_{head,k} = 8 \text{ N/mm}^2$$

Screws in connections with wood-based panels with a thickness below 12 mm (minimum thickness of the wood based panels of $1,2 \cdot d$ with d as outer thread diameter):

$$f_{head,k} = 8 \text{ N/mm}^2$$

limited to $F_{ax,\alpha,Rk} = 400 \text{ N}$

The head diameter d_h shall be greater than $1,8 \cdot d_s$, where d_s is the smooth shank or the wire diameter. Otherwise the characteristic head pull-through capacity $F_{ax,\alpha,Rk} = 0$.

Outer diameter of washers $d_h > 35 \text{ mm}$ shall not be considered.

The minimum thickness of wood-based panels according to the clause 3.9 must be observed.

In steel-to-timber connections the head pull-through capacity is not decisive.

Tensile capacity

The characteristic tensile strength $f_{tens,k}$ of “fischer Power-Fast” and “fischer construction screws” is:

Screws from carbon steel:

Screw d = 3,0 mm:	2,7 kN
Screw d = 3,5 mm:	3,7 kN
Screw d = 4,0 mm:	4,3 kN
Screw d = 4,5 mm:	5,5 kN
Screw d = 5,0 mm:	6,8 kN
Screw d = 6,0 mm:	10,7 kN
Screw d = 8,0 mm:	19,1 kN
Screw d = 10,0 mm:	29,8 kN
Screw d = 12,0 mm:	32,7 kN

Screws from stainless steel:

Screw d = 3,0 mm:	1,6 kN
Screw d = 3,5 mm:	2,1 kN
Screw d = 4,0 mm:	2,8 kN
Screw d = 4,5 mm:	3,5 kN
Screw d = 5,0 mm:	4,3 kN
Screw d = 6,0 mm:	6,2 kN
Screw d = 8,0 mm:	13,0 kN

For screws used in combination with steel plates, the tear-off capacity of the screw head should be greater than the tensile strength of the screw.

Combined laterally and axially loaded screws

For screwed connections subjected to a combination of axial load and lateral load, the following expression should be satisfied:

$$\left(\frac{F_{ax,Ed}}{F_{ax,Rd}} \right)^2 + \left(\frac{F_{la,Ed}}{F_{la,Rd}} \right)^2 \leq 1$$

where

$F_{ax,Ed}$	axial design load of the screw
$F_{la,Ed}$	lateral design load of the screw
$F_{ax,Rd}$	design load-carrying capacity of an axially loaded screw
$F_{la,Rd}$	design load-carrying capacity of a laterally loaded screw

Slip modulus

The axial slip modulus K_{ser} of a screw for the serviceability limit state should be taken independent of angle α to the grain as:

$$C = K_{ser} = 780 \cdot d^{0,2} \cdot \ell_{ef}^{0,4} \quad [N/mm]$$

Where

d	outer thread diameter [mm]
ℓ_{ef}	penetration length in the structural member [mm]

Thermal insulation material on top of rafters

“fischer Power-Fast” screws with an outer thread diameter of d = 6 mm, 8 mm, 10 mm and 12 mm may be used for the fixing of thermal insulation material on top of rafters.

The thickness of the insulation ranges up to 400 mm. The rafter insulation must be placed on top of solid timber or glued laminated timber rafters or cross-laminated timber members and be fixed by battens placed parallel to the rafters or by wood-based panels on top of the insulation layer. The insulation of vertical facades is also covered by the rules given here.

Screws must be screwed in the rafter through the battens or panels and the insulation without pre-drilling in one sequence.

The angle α between the screw axis and the grain direction of the rafter should be between 30° and 90°.

The battens must be from solid timber (softwood) according to EN 338:2003-04. The minimum thickness of the battens is 80 mm and the minimum width 100 mm for screws with outer thread diameter d = 12 mm. The minimum thickness of the battens is 40 mm and the minimum width 60 mm for screws with outer thread diameter d = 10 mm. For screws with outer thread diameter d = 6 mm and 8 mm the minimum thickness of the battens is 30 mm and the minimum width 50 mm.

Alternatively to the battens, boards with a minimum thickness of 20 mm from plywood according to EN 636, particle board according to EN 312, oriented strand board OSB/3 and OSB/4 according to EN 300 or ETA and solid wood panels according to EN 13353 may be used.

The rafter consists of solid timber (softwood) according to EN 338, glued laminated timber according to EN 14081, cross-laminated timber, laminated veneer lumber according to EN 14374 or to ETA or similar glued members according to ETA and has a minimum width of 60 mm.

The insulation must comply with a ETA.

The insulation must have a minimum compressive stress of $\sigma_{10\%} = 0,05 \text{ N/mm}^2$ at 10 % deformation according to EN 826:1996-05.

The analysis of the fixing of the insulation and battens or boards, respectively, may be carried out using the static model in Annex B. The battens or boards, respectively, must have sufficient strength and stiffness. The maximum pressure between the battens or boards, respectively, and the insulation shall not exceed $1,1 \cdot \sigma_{10\%}$.

The characteristic axial withdrawal capacity of the screws for rafter or facade insulation shall be calculated from:

timber to the unloaded end	$a_{3,c} = 7 \cdot d$
Distance $a_{3,t}$ from centre of the screw-part in	
timber to the loaded end	$a_{3,t} = 12 \cdot d$
Distance $a_{4,c}$ from centre of the screw-part in	
timber to the unloaded edge	$a_{4,c} = 3 \cdot d$
Distance $a_{4,t}$ from centre of the screw-part in	
timber to the loaded edge	$a_{4,t} = 6 \cdot d$


For a crossed screw couple the minimum spacing between the crossing screws is $1,5 \cdot d$.

Minimum thickness for structural members is $t = 24$ mm
 for screws with outer thread diameter $d < 8$ mm, $t = 30$ mm
 for screws with outer thread diameter $d = 8$ mm, $t = 40$ mm
 for screws with outer thread diameter $d = 10$ mm and $t = 80$ mm for screws with outer thread diameter $d = 12$ mm.

4 Attestation and verification of constancy of performance (AVCP)

4.1 AVCP system

According to the decision 97/176/EC of the European Commission¹, as amended, the system(s) of assessment and verification of constancy of performance (see Annex V to Regulation (EU) No 305/2011) is 3.

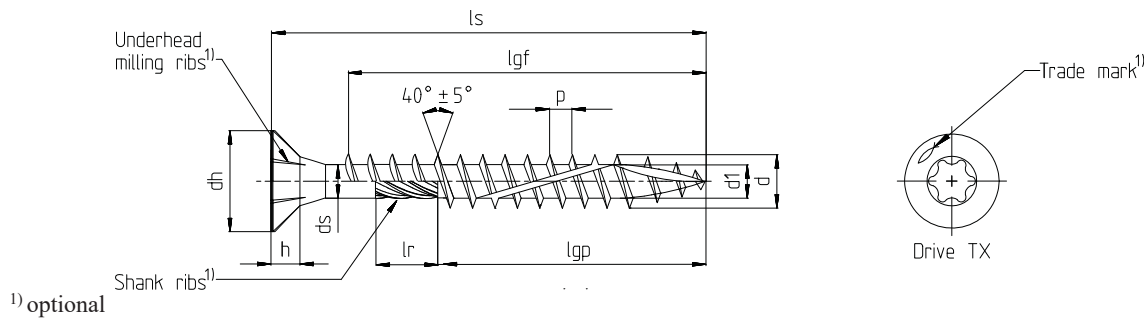


FCS wood construction screw - Countersunk head with full- or partial thread

- Carbon steel
- Possible surface treatments: yellow or blue zinc-plated, blue zinc-plated $\geq 12\mu\text{m}$, bonus-zinc

Nominal diameter			8,0		10,0											
d	Outer diameter		8,00		10,00											
	Allow. deviation		±0,30		±0,40											
d _i	Core diameter		5,40		6,35											
	Allow. deviation		-0,30/+0,20													
d _h	Head diameter		14,40		18,40											
	Allow. deviation		±0,40													
d _s	Shank diameter		5,90		7,10											
	Allow. deviation		-0,30/+0,10													
h	Head height		6,00-7,00		7,50-8,50											
p	Thread pitch		5,20		5,60											
	Allow. deviation		±10%													
l _r ¹⁾	Shank rib length		13,0													
	Allow. deviation		-2,00													
Drive TX			40													
Screw length l _s			Standard thread length l _{gf} = Full thread l _{gp} =Partial thread Tolerance: ± 2,0													
Nominal length	min	max	l _{gf}	l _{gp}	l _{gf}	l _{gp}										
80	78,50	81,50	70	50		52										
90	88,25	91,75	80	50		52										
100	98,25	101,75	80	50		52										
110	108,25	111,75	100	75		80										
120	118,25	121,75		75		80										
in steps of 10mm																
130-400	l _s -2,00	l _s +2,00		75		80										

All sizes in mm

- Intermediate lengths at l_s are possible
- Threaded lengths between $4 \times d \leq l_g \leq l_{g\text{max}}$ are possible

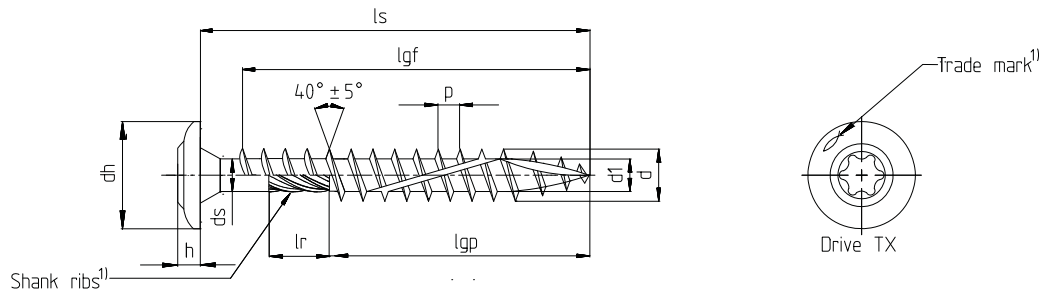

¹⁾ optional


FCS wood construction screw - Flange head with partial thread

- Carbon steel
- Possible surface treatments: yellow or blue zinc-plated, blue zinc-plated $\geq 12\mu\text{m}$

Nominal diameter		8,0	10,0														
d	Outer diameter	8,00	10,00														
	Allow. deviation	-0,40/+0,30	$\pm 0,40$														
d _i	Core diameter	5,40	6,35														
	Allow. deviation	$\pm 0,30$															
d _h	Head diameter	21,00	24,70														
	Allow. deviation	$\pm 1,00$	-1,20/+2,80														
d _s	Shank diameter	5,90	7,10														
	Allow. deviation	-0,30/+0,20															
h	Head height	2,50-4,50	3,70-5,70														
	Thread pitch	5,20	5,60														
p	Allow. deviation	$\pm 10\%$															
l _r ¹⁾	Shank rib length	12,00															
	Allow. deviation	$\pm 1,00$															
Drive TX		40															
Screw length l _s		Standard thread length l _{gf} = Full thread l _{gp} = Partial thread Tolerance: $\pm 2,0$															
Nominal length	min	max	l _{gf}	l _{gp}	l _{gf}	l _{gp}											
80	78,50	81,50	70	50		52											
90	88,25	91,75	80	50		52											
100	98,25	101,75	80	50		52											
110	108,25	111,75	100	75		80											
120	118,25	121,75		75		80											
in steps of 10mm																	
130-400	l _s -2,00	l _s +2,00		75		80											

All sizes in mm

- Intermediate lengths at l_s are possible
- Threaded lengths between $4 \times d \leq l_g \leq l_{g\text{max}}$ are possible

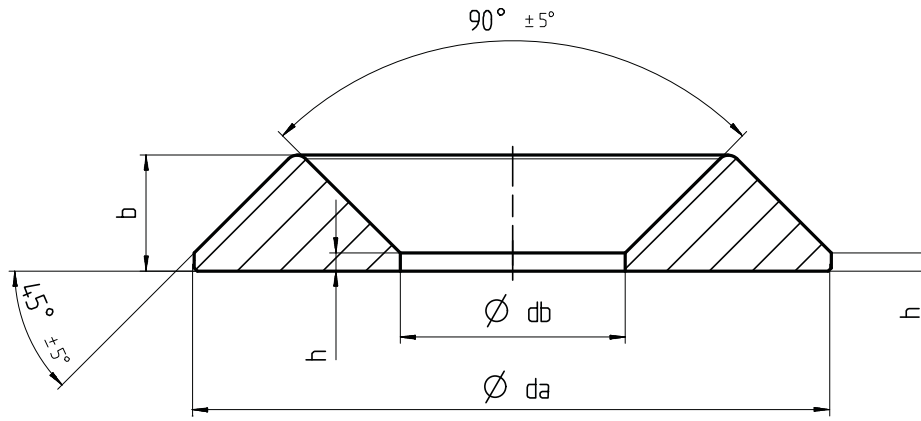


Washer for Power-Fast and construction screws

- Carbon Steel - possible surface treatments: yellow or blue zinc-plated, bonus- zined, $\geq 12\mu\text{m}$ blue zinc-plated
- Stainless steel

Nominal diameter		Type 1				Type 2		
Size		6	8	10	12	6	8	10
db	Inner diameter	6,70	8,70	11,20	6,70	6,70	8,70	11,20
	Allow. deviation	-0,40						
da	Outer diameter	21	30	35	43	21	25,50	30,50
	Allow. deviation	$\pm 2,0$						
b	Height	4,70	5,20	6,20	8,30	4,70	5,20	6,20
	Allow. deviation	-0,40						
h	Height	1,50	1,80	2,00	2,20	1,50	1,80	2,00
	Allow. deviation	-0,15						

All sizes in mm

Annex B Fixing of on-roof insulation system

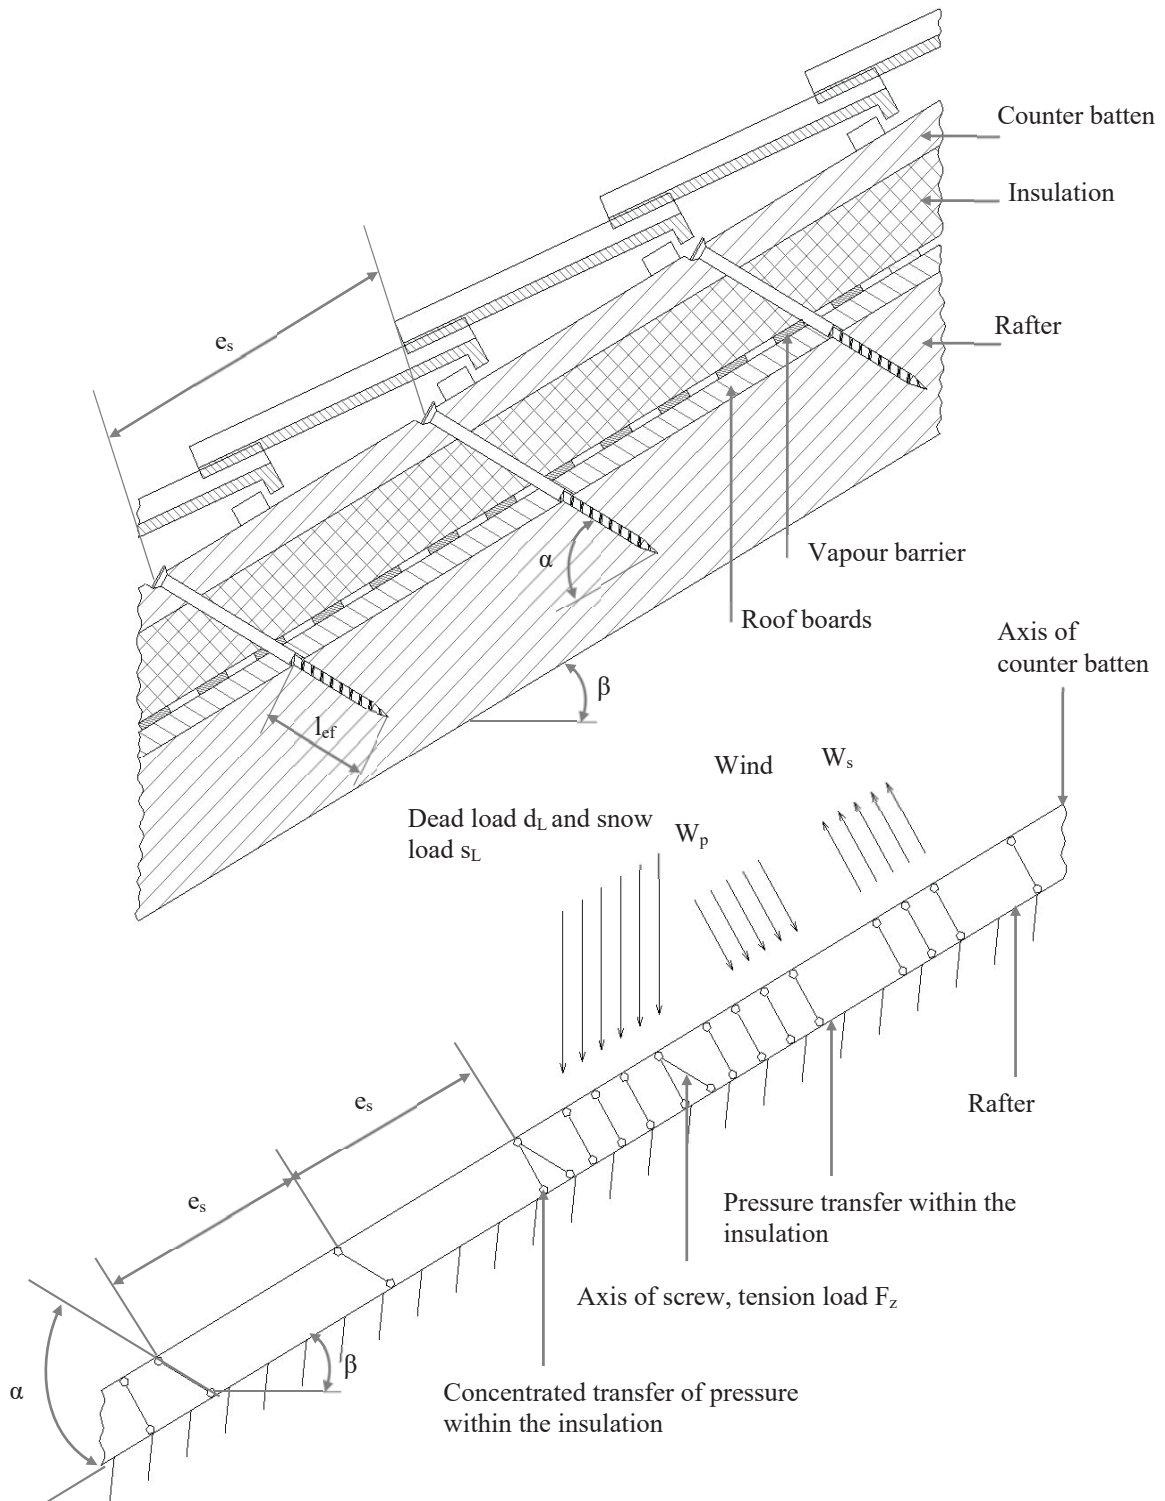

W_s	=	Wind suction	W_p	=	Wind pressure
e_s	=	Spacing of screws	l_{ef}	=	Thread part part of screw in rafter
β	=	Roof inclination	α	=	Angle between axis of screw and axis of rafter

Design of the battens

The bending stresses are calculated as:

$$M = \frac{(F_b + F_s) \cdot \ell_{\text{char}}}{4}$$

Where

$$\ell_{\text{char}} = \text{characteristic length } \ell_{\text{char}} = \sqrt[4]{\frac{4 \cdot EI}{w_{\text{ef}} \cdot K}}$$

EI = bending stiffness of the batten

K = coefficient of subgrade

w_{ef} = effective width of the heat insulation

F_b = Point loads perpendicular to the battens

F_s = Point loads perpendicular to the battens, load application in the area of the screw heads

The coefficient of subgrade K may be calculated from the modulus of elasticity E_{HI} and the thickness t_{HI} of the heat insulation if the effective width w_{ef} of the heat insulation under compression is known. Due to the load extension in the heat insulation the effective width w_{ef} is greater than the width of the batten or rafter, respectively. For further calculations, the effective width w_{ef} of the heat insulation may be determined according to:

$$w_{\text{ef}} = w + t_{\text{HI}} / 2$$

where

w = minimum width of the batten or rafter, respectively

t_{HI} = thickness of the heat insulation

$$K = \frac{E_{\text{HI}}}{t_{\text{HI}}}$$

The following condition shall be satisfied:

$$\frac{\sigma_{\text{m,d}}}{f_{\text{m,d}}} = \frac{M_{\text{d}}}{W \cdot f_{\text{m,d}}} \leq 1$$

For the calculation of the section modulus W the net cross section has to be considered.

The shear stresses shall be calculated according to:

$$V = \frac{(F_b + F_s)}{2}$$

The following condition shall be satisfied:

$$\frac{\tau_{\text{d}}}{f_{\text{v,d}}} = \frac{1,5 \cdot V_{\text{d}}}{A \cdot f_{\text{v,d}}} \leq 1$$

For the calculation of the cross section area the net cross section has to be considered.

Design of the heat insulation

The compressive stresses in the heat insulation shall be calculated according to:

$$\sigma = \frac{1,5 \cdot F_b + F_s}{2 \cdot \ell_{\text{char}} \cdot w}$$

The design value of the compressive stress shall not be greater than 110 % of the compressive stress at 10 % deformation calculated according to EN 826.

Design of the screws

The screws are loaded predominantly axially. The axial tension force in the screw may be calculated from

the shear loads of the roof R_s :

$$T_s = \frac{R_s}{\cos \alpha}$$

The load-carrying capacity of axially loaded screws is the minimum design value of the axial withdrawal capacity of the threaded part of the screw, the head pull-through capacity of the screw and the tensile capacity of the screw.

In order to limit the deformation of the screw head for heat insulation thicknesses over 200 mm or with compressive strength below 0,12 N/mm², respectively, the axial withdrawal capacity of the screws shall be reduced by the factors k_1 and k_2 :

$$F_{ax,\alpha,Rd} = \min \left\{ \begin{array}{l} k_{ax} * f_{ax,d} * d * l_{ef} * k_1 * k_2 * \left(\frac{\rho_k}{350} \right)^{0,8} \\ f_{head,d} * d_h^2 * \left(\frac{\rho_k}{350} \right)^{0,8} \\ f_{tens,d} \end{array} \right. \quad [N]$$

where:

$f_{ax,d}$	design value of the axial withdrawal parameter of the threaded part of the screw
d	outer thread diameter of the screw
l_{ef}	Point side penetration length of the threaded part of the screw in the rafter, $l_{ef} \geq 40$ mm
α	Angle between grain and screw axis ($\alpha \geq 30^\circ$)
ρ_k	characteristic density of the wood-based member [kg/m ³]
$f_{head,d}$	design value of the head pull-through capacity of the screw
d_h	head diameter
k_1	$\min \{1; 200/t_{HI}\}$
k_2	$\min \{1; \sigma_{10\%}/0,12\}$
t_{HI}	thickness of the heat insulation [mm]
$\sigma_{10\%}$	compressive stress of the heat insulation under 10 % deformation [N/mm ²]
$f_{tens,d}$	Design value of the tensile capacity of the screw [N]

If equation k_1 and k_2 are considered, the deflection of the battens does not need to be considered. Alternatively to the battens, panels with a minimum thickness of 20 mm from plywood according to EN 636 or an ETA or national provisions that apply at the installation site, particle board according to EN 312 or an ETA or national provisions that apply at the installation site, oriented strand board according to EN 300 or an ETA or national provisions that apply at the installation site and solid wood panels according to EN 13353 or an ETA or national provisions that apply at the installation site or cross laminated timber according to an ETA may be used.

Thermal insulation material on rafters with parallel screws perpendicular to the roof plane

Alternatively to the battens, panels with a minimum thickness of 20 mm from plywood according to EN 636, particleboard according to EN 312, oriented strand board OSB/3 and OSB/4 according to EN 300 or European Technical Approval and solid wood panels according to EN 13353 may be used.

Characteristic load-carrying capacity of a screw loaded in shear:

$$F_{v,Rk} = \min \left\{ \begin{array}{l} f_{h,b,k} \cdot d \cdot t_b \\ f_{h,r,k} \cdot d \cdot t_r \\ \frac{f_{h,b,k} \cdot d \cdot \beta}{1 + \beta} \cdot \left(\sqrt{4t_{il}^2 + \left(2 + \frac{1}{\beta}\right)t_b^2 + (2 + \beta)t_r^2 + 4t_{il}(t_b + t_r) + 2t_b t_r - 2t_{il} - t_b - t_r} \right) + \frac{F_{ax,Rk}}{4} \\ 1,05 \cdot \frac{f_{h,b,k} \cdot d \cdot \beta}{\frac{1}{2} + \beta} \left(\sqrt{t_{il}^2 + t_{il}t_b + \frac{t_b^2}{2} \left(1 + \frac{1}{\beta}\right) + \frac{M_{y,k}}{f_{h,b,k}d} \left(1 + \frac{2}{\beta}\right)} - t_{il} - \frac{t_b}{2} \right) + \frac{F_{ax,Rk}}{4} \\ 1,05 \cdot \frac{f_{h,b,k} \cdot d \cdot \beta}{\frac{1}{2} + \beta} \left(\sqrt{t_{il}^2 + t_{il}t_r + \frac{t_r^2}{2} (1 + \beta) + \frac{M_{y,k}}{f_{h,b,k}d} \left(2 + \frac{1}{\beta}\right)} - t_{il} - \frac{t_r}{2} \right) + \frac{F_{ax,Rk}}{4} \\ 1,15 \cdot \frac{f_{h,b,k} \cdot d}{1 + \beta} \left(\sqrt{\beta^2 t_{il}^2 + 4\beta(\beta + 1) \cdot \frac{M_{y,k}}{f_{h,b,k}d}} - \beta t_{il} \right) + \frac{F_{ax,Rk}}{4} \end{array} \right.$$

Where:


$f_{h,b,k}$	Characteristic batten embedding strength [N/mm ²]
$f_{h,r,k}$	Characteristic rafter embedding strength [N/mm ²]
β	$f_{h,r,k}/f_{h,b,k}$
d	Outer thread diameter [mm]
t_b	Batten thickness [mm]
t_r	The lower value of rafter thickness or screw penetration length [mm]
t_{il}	Interlayer thickness [mm]
$M_{y,k}$	Characteristic fastener yield moment [Nmm]
$F_{ax,Rk}$	Characteristic axial tensile capacity of the screw [N]

Annex C

Minimum distances and spacing

Axially or laterally loaded screws in the plane or edge surface of cross laminated timber

Definition of spacing, end and edge distances in the plane surface unless otherwise specified in the technical specification (ETA or hEN) for the cross laminated timber:

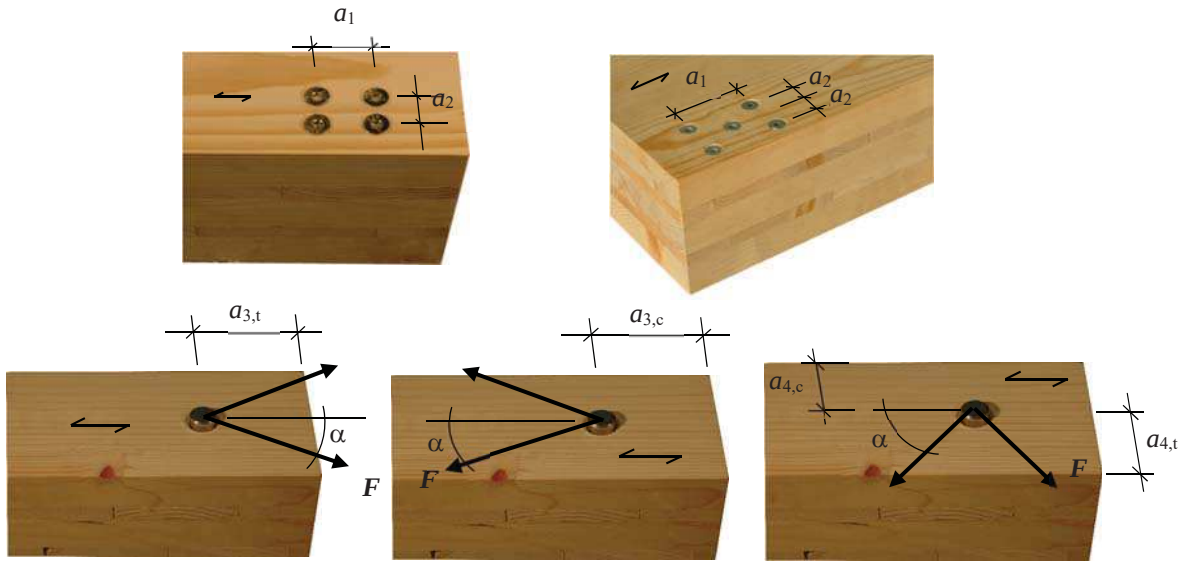

Definition of spacing, end and edge distances in the edge surface unless otherwise specified in the technical specification (ETA or hEN) for the cross laminated timber.

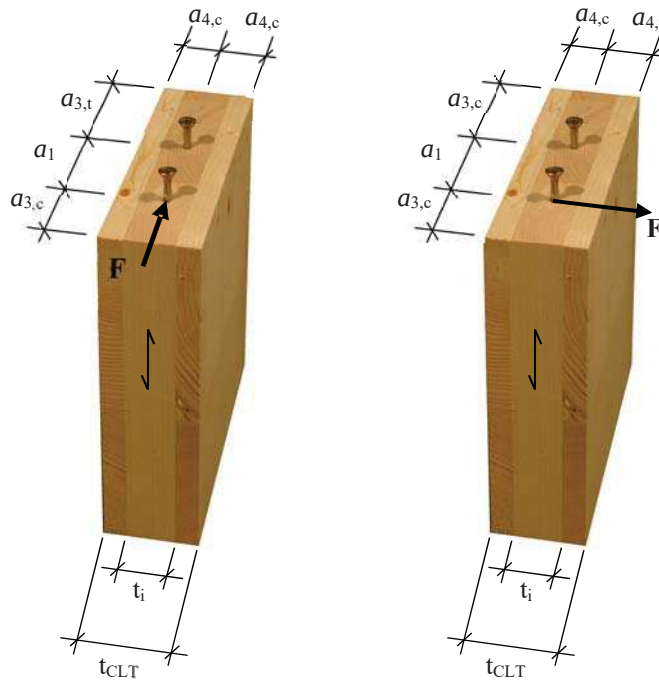


Table C1: Minimum spacing, end and edge distances of screws in the plane or edge surfaces of cross laminated timber

	a_1	$a_{3,t}$	$a_{3,c}$	a_2	$a_{4,t}$	$a_{4,c}$
Plane surface (see Figure 1)	$4 \cdot d$	$6 \cdot d$	$6 \cdot d$	$2,5 \cdot d$	$6 \cdot d$	$2,5 \cdot d$
Edge surface (see Figure 2)	$10 \cdot d$	$12 \cdot d$	$7 \cdot d$	$4 \cdot d$	$6 \cdot d$	$3 \cdot d$